

ColorReach Compact Powercore

Premium long-throw compact exterior LED floodlight with intelligent color light



ColorReach Compact Powercore

Premium long-throw compact exterior LED floodlight with intelligent color light

ColorReach Compact Powercore combines all the benefits of LED-based lighting and control in a compact fixture specifically designed for large-scale installations, such as commercial skyscrapers, casinos, bridges, piers, public monuments, and themed attractions. With levels of light output and projection never before achieved in a compact LED lighting fixture, ColorReach Compact Powercore delivers intense, energy-efficient output at a reasonable price, opening up new possibilities for exterior illumination. Custom configurations with custom channels of white or color LED sources are also available to support special applications.

- Integrates Powercore technology — Powercore technology rapidly, efficiently, and accurately controls power output to fixtures directly from line voltage. Philips Data Enabler Pro merges line voltage and control data and delivers them to fixtures over a single standard cable, dramatically simplifying installation and lowering total system cost.
- Versatile optics — Exchangeable spread lenses of 8°, 13°, 23°, 40°, 63°, and an asymmetric 5° x 17° support a variety of photometric distributions for a multitude of applications, including spotlighting, wall grazing, and asymmetric wall washing. Bezel and gasket are included with spread lenses for easy user installation.
- Saturated, cost-effective color — High-performance LEDs offer rich, saturated color at significantly less cost for installation, operation, and maintenance than traditional light sources.
- Simple fixture positioning — Rugged, slim-profile mounting bracket allows simple positioning and fixture rotation through a full 360°. Side locking bolts reliably secure fixture with a standard wrench.
- Universal power input range — Accepts a universal power input range, allowing consistent installation in any location around the world.
- Industry-leading controls — Works seamlessly with the complete Philips Color Kinetics line of controllers, including Light System Manager, iPlayer 3, and ColorDial Pro, as well as third-party controllers.



Intense light output

ColorReach Compact Powercore outputs thousands of lumens and throws light hundreds of feet, delivering legitimate LED-based illumination of large-scale structures and objects in a compact, fully-sealed housing.


Photometrics / ColorReach Compact Powercore

Photometric data is based on test results from an independent NIST traceable testing lab. IES data is available at www.philipscolorkinetics.com/support/ies.

5° (no spread lens)

LED	Lumens	Efficacy
RGB	4505	36.8

Polar Candela Distribution



VA	0°	10°	20°	30°	40°
0	271369	271369	271369	271369	271369
5	49083	54543	55596	55014	56479
15	465	469	485	503	528
25	141	143	150	158	177
35	79	76	80	79	107
45	49	47	47	48	48
55	39	43	36	40	39
65	36	32	31	33	32
75	29	25	25	25	25
85	23	23	23	23	23
90	23	22	0	0	0

Illuminance at Distance

Center Beam fc	Beam Width
4 ft: 16,961 fc	0.5 ft 0.4 ft
8 ft: 4,240 fc	0.9 ft 0.9 ft
12 ft: 1,884 fc	1.4 ft 1.3 ft
16 ft: 1,060 fc	1.9 ft 1.7 ft
20 ft: 678 fc	2.3 ft 2.2 ft
24 ft: 471 fc	2.8 ft 2.6 ft

520 ft (158.5 m) 1 fc maximum distance
 Vert. Spread: 6.6°
 Horiz. Spread: 6.2°

Coefficients Of Utilization - Zonal Cavity Method

RCC %:	80	70	60	50	30	10	0
RW %:	70	50	30	0	50	30	0
RCR:	0	119	119	119	119	119	119
1	116	114	112	111	108	106	106
2	113	110	108	106	103	102	102
3	111	108	105	103	100	99	97
4	109	105	103	101	98	97	96
5	108	104	101	99	96	95	94
6	105	102	100	98	95	94	93
7	105	101	98	95	92	91	90
8	104	100	97	94	91	90	89
9	103	99	97	94	91	90	89
10	103	99	96	94	91	90	89


Zonal Lumen

Zone	Lumens	% Fixture
0 - 60	4419.9	98.1 %
60 - 90	84.9	1.9 %
0 - 90	4504.8	100.0 %

8° spread lens

LED	Lumens	Efficacy
RGB	4111	32.3

Polar Candela Distribution



VA	0°	10°	20°	30°	40°
0	141546	141546	141546	141546	141546
5	51073	54259	54274	56276	58731
15	634	643	668	690	714
25	169	169	173	173	185
35	96	95	91	90	109
45	54	51	49	51	52
55	40	41	35	37	37
65	31	30	27	27	27
75	24	23	22	22	22
85	21	20	20	20	20
90	20	20	0	0	0

Illuminance at Distance

Center Beam fc	Beam Width
4 ft: 8,847 fc	0.6 ft 0.6 ft
8 ft: 2,212 fc	1.2 ft 1.2 ft
12 ft: 983 fc	1.8 ft 1.8 ft
16 ft: 553 fc	2.4 ft 2.3 ft
20 ft: 354 fc	3.0 ft 2.9 ft
24 ft: 246 fc	3.6 ft 3.5 ft

376 ft (114.6 m) 1 fc maximum distance
 Vert. Spread: 8.5°
 Horiz. Spread: 8.4°

Coefficients Of Utilization - Zonal Cavity Method

RCC %:	80	70	60	50	30	10	0
RW %:	70	50	30	0	50	30	0
RCR:	0	119	119	119	119	119	119
1	116	114	112	111	108	106	106
2	113	110	108	106	103	102	102
3	111	107	105	103	100	99	97
4	109	105	102	100	97	96	95
5	107	103	100	98	95	94	93
6	106	102	99	97	94	93	92
7	105	100	98	96	93	92	91
8	104	99	97	95	92	91	90
9	103	98	96	94	91	90	89
10	102	97	95	93	90	89	88


Zonal Lumen

Zone	Lumens	% Fixture
0 - 60	4035.4	98.2 %
60 - 90	75.1	1.8 %
0 - 90	4110.6	100.0 %

13° spread lens

LED	Lumens	Efficacy
RGB	4053	31.8

Polar Candela Distribution

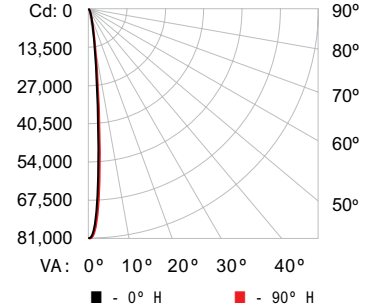

VA	0°	10°	20°	30°	40°
0	80949	80949	80949	80949	80949
5	46190	46041	45544	45473	46699
15	1520	1484	1350	1197	1167
25	182	182	181	178	183
35	103	101	96	94	105
45	57	54	51	51	53
55	40	38	36	36	36
65	30	30	28	28	27
75	24	23	22	22	22
85	20	20	20	20	20
90	20	0	0	0	0

Illuminance at Distance

Center Beam fc	Beam Width
4 ft: 5,059 fc	0.8 ft 0.7 ft
8 ft: 1,265 fc	1.7 ft 1.5 ft
12 ft: 562 fc	2.5 ft 2.2 ft
16 ft: 316 fc	3.3 ft 3.0 ft
20 ft: 202 fc	4.2 ft 3.7 ft
24 ft: 141 fc	5.0 ft 4.5 ft

285 ft (86.8 m) 1 fc maximum distance
 Vert. Spread: 11.9°
 Horiz. Spread: 10.7°

Coefficients Of Utilization - Zonal Cavity Method

RCC %:	80	70	60	50	30	10	0
RW %:	70	50	30	0	50	30	0
RCR:	0	116	114	112	111	108	106
1	113	110	107	105	102	101	100
2	111	107	104	101	98	97	96
3	109	104	101	98	95	94	93
4	108	102	99	97	94	93	92
5	105	100	97	95	92	91	90
6	105	100	97	95	92	91	90
7	103	99	96	94	91	90	89
8	102	97	94	92	89	88	87
9	101	96	93	91	88	87	86
10	100	95	92	90	87	86	85

Zonal Lumen


Zone	Lumens	% Fixture
0 - 60	3979.5	98.2 %
60 - 90	73.9	1.8 %
0 - 90	4053.4	100.0 %

23° spread lens




LED	Lumens	Efficacy
RGB	4063	32.0

Polar Candela Distribution



	0	25	45	70	90
0	21836	21836	21836	21836	21836
5	18700	19044	19314	19604	19751
15	6286	6627	6843	7046	7140
25	850	900	916	939	955
35	131	132	130	131	133
45	69	69	67	67	68
55	48	47	46	45	45
65	35	35	34	33	33
75	26	26	25	24	24
85	20	20	20	20	20
90	19	9	7	3	0

Illuminance at Distance

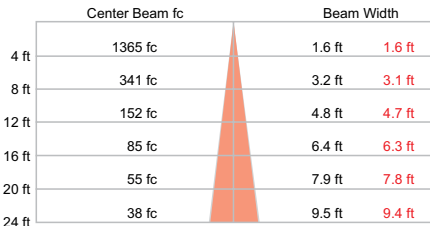

148 ft (45.1 m)
1 fc maximum distance
Vert. Spread: 22.5°
Horiz. Spread: 22.2°

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80	70	60	30	10	0
RW %:	70 50 30 0	70 50 30 0	50 30 20	50 30 20	50 30 20	0
RCR: 0	119 119 119 119	116 116 116 100	111 111 111	106 106 106	102 102 102	100
1	115 112 110 109	112 110 109 96	106 105 104	103 102 101	99 98 98	96
2	111 107 104 101	109 105 103 93	102 100 98	99 98 96	97 95 94	93
3	107 102 99 96	105 101 98 90	99 96 94	96 94 92	94 92 91	89
4	104 99 95 91	102 97 94 87	96 92 90	94 91 89	92 90 88	87
5	101 95 91 88	100 94 90 85	93 89 87	91 88 86	90 87 85	84
6	98 92 88 85	97 91 87 83	90 87 84	89 86 83	88 85 83	82
7	96 89 85 82	95 89 85 81	88 84 82	87 83 81	86 83 81	80
8	93 87 83 80	92 86 82 79	85 82 79	84 81 79	84 81 79	78
9	91 84 80 78	90 84 80 77	83 80 77	82 79 77	82 79 77	76
10	89 82 78 76	88 82 78 75	81 78 75	81 77 75	80 77 75	74

Zonal Lumens


Zone	Lumens	% Fixture
0 - 60	3981.5	98.0 %
60 - 90	81.6	2.0 %
0 - 90	4063.1	100.0 %

40° spread lens




LED	Lumens	Efficacy
RGB	4028	31.6

Polar Candela Distribution



	0	25	45	70	90
0	7659	7659	7659	7659	7659
5	7135	7226	7287	7380	7432
15	4812	4985	5142	5340	5442
25	2266	2399	2536	2720	2812
35	719	778	840	930	981
45	177	193	202	220	235
55	70	72	72	71	72
65	45	45	43	42	42
75	29	29	27	27	27
85	19	19	18	18	18
90	18	18	18	18	18

Illuminance at Distance

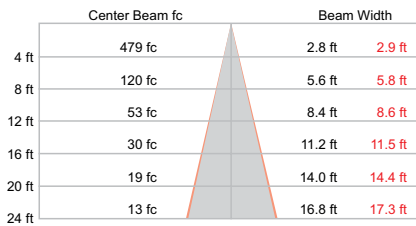

88 ft (26.8 m)
1 fc maximum distance
Vert. Spread: 38.7°
Horiz. Spread: 39.6°

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80	70	60	30	10	0
RW %:	70 50 30 0	70 50 30 0	50 30 20	50 30 20	50 30 20	0
RCR: 0	119 119 119 119	116 116 116 100	111 111 111	106 106 106	102 102 102	100
1	114 111 108 106	111 109 106 94	105 103 101	101 100 98	97 96 95	94
2	108 104 100 96	106 102 98 88	99 96 93	96 93 91	93 91 89	88
3	103 97 92 89	101 96 91 83	93 90 87	91 88 85	89 86 84	82
4	99 92 86 82	97 90 86 79	88 84 81	86 83 80	84 82 79	78
5	94 86 81 77	93 86 80 74	84 79 76	82 78 75	81 77 75	73
6	90 82 76 72	89 81 76 70	80 75 72	78 74 71	77 73 71	69
7	86 78 72 68	85 77 72 67	76 71 68	75 70 67	74 70 67	66
8	83 74 68 65	82 73 68 64	72 68 64	71 67 64	70 67 64	62
9	79 70 65 61	78 70 65 61	69 64 61	68 64 61	67 64 61	59
10	76 67 62 58	75 67 62 58	66 61 58	65 61 58	65 61 58	57

Zonal Lumens


Zone	Lumens	% Fixture
0 - 60	3934.8	97.7 %
60 - 90	93.2	2.3 %
0 - 90	4028.1	100.0 %

63° spread lens




LED	Lumens	Efficacy
RGB	4009	31.5

Polar Candela Distribution

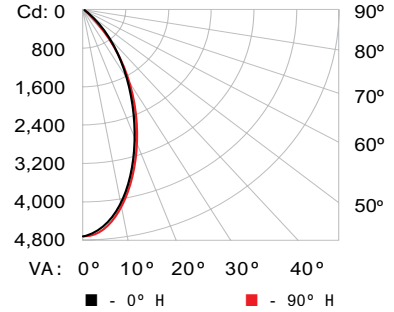

	0	25	45	70	90
0	4733	4733	4733	4733	4733
5	4524	4533	4551	4586	4611
15	3543	3568	3595	3658	3722
25	2269	2219	2204	2231	2285
35	1149	1062	1016	1000	1025
45	473	405	367	350	358
55	172	140	124	116	119
65	70	61	56	51	50
75	35	31	28	25	24
85	18	17	17	16	16
90	16	0	0	0	0

Illuminance at Distance

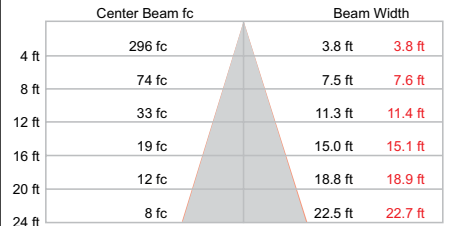

69 ft (21.0 m)
1 fc maximum distance
Vert. Spread: 50.3°
Horiz. Spread: 50.6°

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80	70	60	30	10	0
RW %:	70 50 30 0	70 50 30 0	50 30 20	50 30 20	50 30 20	0
RCR: 0	119 119 119 119	116 116 116 100	111 111 111	106 106 106	102 102 102	100
1	113 110 107 104	110 108 105 92	103 101 100	100 98 97	96 95 94	92
2	106 101 97 93	104 99 95 85	96 93 90	93 90 88	90 88 86	84
3	101 93 88 84	98 92 87 78	89 85 82	87 83 80	85 82 79	77
4	95 87 81 76	93 86 80 73	83 79 75	81 77 74	79 76 73	71
5	90 81 74 70	88 80 74 67	78 73 69	76 72 68	75 71 68	66
6	85 75 69 64	83 75 68 63	73 68 64	72 67 63	70 66 63	61
7	81 71 64 60	79 70 64 58	69 63 59	67 62 59	66 62 58	57
8	76 66 60 56	75 66 60 55	65 59 55	64 59 55	63 58 55	53
9	73 62 56 52	72 62 56 51	61 56 52	60 55 52	59 55 51	50
10	69 59 53 49	68 59 53 48	58 52 49	57 52 48	56 52 48	47

Zonal Lumens


Zone	Lumens	% Fixture
0 - 60	3877.6	96.7 %
60 - 90	131.0	3.3 %
0 - 90	4008.6	100.0 %

5x17° spread lens



LED	Lumens	Efficacy
RGB	4084	32.1

Polar Candela Distribution

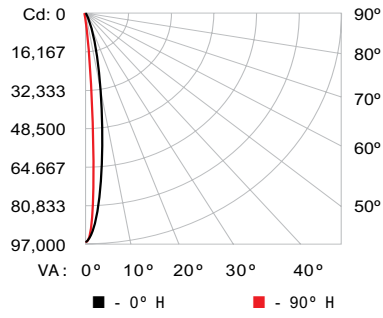

	0	25	45	70	90
0	96765	96765	96765	96765	96765
5	69434	57305	38831	23251	20218
15	9262	1558	619	428	416
25	572	191	161	150	153
35	166	99	91	79	82
45	98	56	49	46	46
55	66	39	34	35	35
65	46	31	27	26	25
75	30	24	22	21	21
85	20	19	20	20	20
90	19	0	0	0	0

Illuminance at Distance

	Center Beam Ic	Beam Width
4 ft	6,048 fc	1.2 ft 0.4 ft
8 ft	1,512 fc	2.3 ft 0.9 ft
12 ft	672 fc	3.5 ft 1.3 ft
16 ft	378 fc	4.6 ft 1.8 ft
20 ft	242 fc	5.8 ft 2.2 ft
24 ft	168 fc	7.0 ft 2.6 ft

311 ft (94.7 m) ■ Vert. Spread: 16.5°
 1 fc maximum distance ■ Horiz. Spread: 6.3°

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80		70		50		30		10		0							
RW %:	Z0	S0	30	0	Z0	S0	30	0	Z0	S0	20	0						
RCR: 0	119	119	119	119	116	116	116	100	111	111	111	106	106	106	102	102	102	100
1	116	114	112	110	113	112	110	98	108	106	105	104	103	102	101	100	99	98
2	113	109	107	105	111	108	105	96	105	103	101	102	100	99	99	98	97	96
3	110	106	103	101	108	105	102	95	102	100	98	100	98	97	98	97	95	94
4	108	103	100	98	106	102	99	94	100	98	96	99	97	95	97	95	94	93
5	106	101	98	95	104	100	97	92	99	96	94	97	95	93	96	94	93	92
6	104	99	96	94	103	98	95	91	97	95	93	96	94	92	95	93	92	91
7	102	97	94	92	101	97	94	90	96	93	91	95	93	91	94	92	91	90
8	101	96	93	91	100	96	93	90	95	92	90	94	92	90	93	91	90	89
9	99	95	92	90	99	94	91	89	94	91	89	93	91	89	92	90	89	88
10	98	93	91	89	98	93	90	88	93	90	88	92	90	88	91	89	88	87


Zonal Lumen

Zone	Lumens	% Fixture
0 - 60	4008.1	98.1 %
60 - 90	75.8	1.9 %
0 - 90	4083.9	100.0 %

Specifications, UL / CE

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Details
Output	Beam Angle	5° native 8°, 13°, 23°, 40°, 63°, and 5° x 17° (asymmetric) spread lenses
	Lumens*	4,505 (full unit, no spread lens)
	LED Channels	Red / Green / Blue
	Lumen Maintenance†	100,000 hours L70 @ 25° C 100,000 hours L70 @ 50° C
Electrical	Input Voltage	100 – 277 VAC, auto-ranging, 50 / 60 Hz via Data Enabler Pro
	Power Consumption	135 W
Control	Interface	Data Enabler Pro (DMX / Ethernet)
	Control System	Philips Color Kinetics full range of controllers, including Light System Manager, iPlayer 3, and ColorDial Pro, or third-party controllers
Physical	Dimensions Height x Width x Depth	8.5 x 28.9 x 7.7 in (217 x 733 x 196 mm)
	Weight	51 lb (23 kg)
	Effective Projected Area (EPA)	0.186 m ²
	Housing	Die-cast aluminium, powder-coated finish
	Lens	Tempered glass
	Fixture Connections	Integral male / female waterproof connector, 6 ft (1.8 m) unified power / data cable
	Temperature Ranges	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage
	Humidity	0 – 95%, non-condensing
Certification and Safety	Certification	UL / cUL, FCC Class A, CE, PSE
	Environment	Dry / Damp / Wet Location, IP66

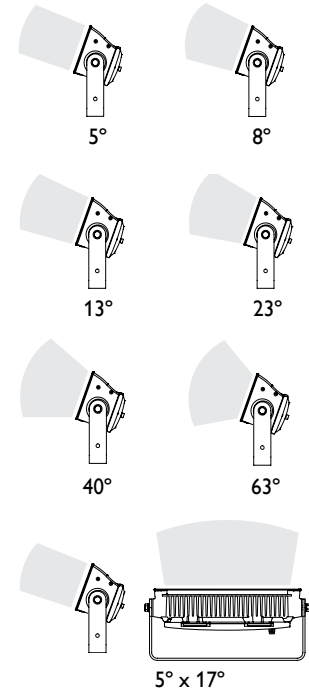


* Lumen measurement complies with IES LM-79-08 testing procedures

† L70 = 70% lumen maintenance (when light output drops below 70% of initial output). Ambient luminaire temperatures specified. Lumen maintenance calculations are based on lifetime prediction graphs supplied by LED source manufacturers. Calculations for white-light LED fixtures are based on measurements that comply with IES LM-80-08 testing procedures. Refer to www.philipscolorkinetics.com/support/appnotes/lm-80-08.pdf for more information.




CHROMACORE™ | OPTIBIN™ | POWERCORE™
CKTECHNOLOGY | CKTECHNOLOGY | CKTECHNOLOGY

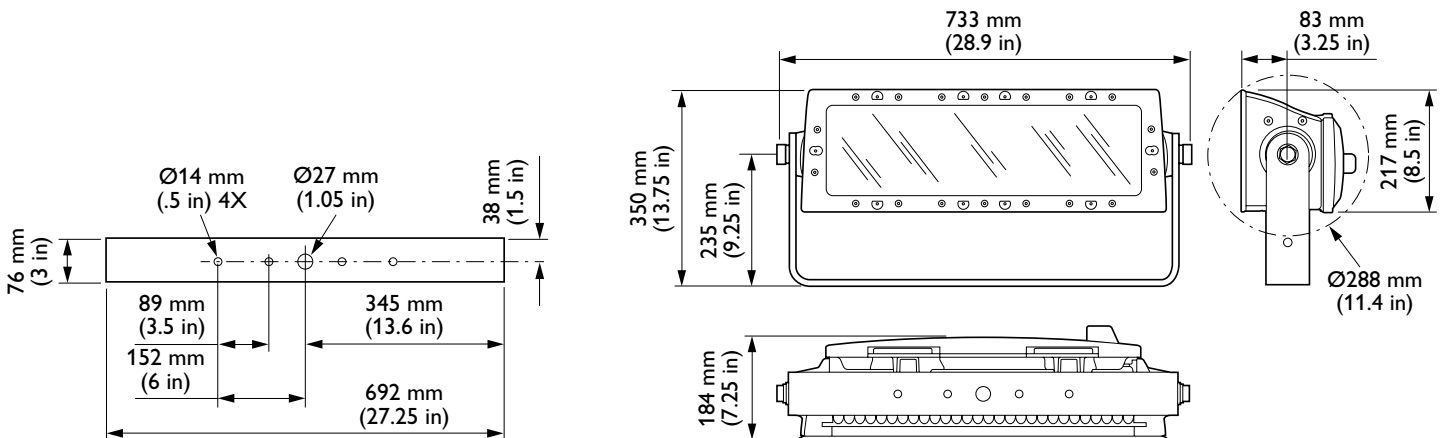

Specifications, CQC

Due to continuous improvements and innovations, specifications may change without notice.

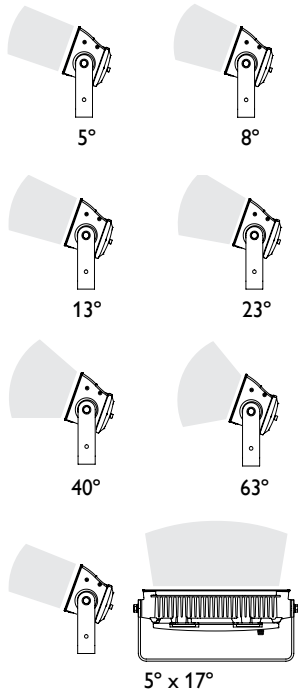

Item	Specification	Details
Output	Beam Angle	5° native 8°, 13°, 23°, 40°, 63°, and 5° x 17° (asymmetric) spread lenses
	Lumens*	4,505 (full unit, no spread lens)
	LED Channels	Red / Green / Blue
	Lumen Maintenance†	100,000 hours L70 @ 25° C 100,000 hours L70 @ 50° C
Electrical	Input Voltage	100 – 240 VAC, auto-switching, 50 / 60 Hz via Data Enabler Pro
	Power Consumption	130 W
Control	Interface	Data Enabler Pro (DMX / Ethernet)
	Control System	Philips Color Kinetics full range of controllers, including Light System Manager, iPlayer 3, and ColorDial Pro, or third-party controllers
Physical	Dimensions Height x Width x Depth	8.5 x 28.9 x 7.7 in (217 x 733 x 196 mm)
	Weight	51 lb (23 kg)
	Effective Projected Area (EPA)	0.186 m ²
	Housing	Die-cast aluminium, powder-coated finish
	Lens	Tempered glass
	Fixture Connections	Integral male / female waterproof connector, 6 ft (1.8 m) unified power / data cable
	Temperature Ranges	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage
	Humidity	0 – 95%, non-condensing
	Fixture Run Lengths	To calculate fixture run lengths and total power consumption for your specific installation, download the Configuration Calculator from www.philipscolorkinetics.com/support/install_tool/
	Certification and Safety	Certification
Environment		Dry / Damp / Wet Location, IP66



* Lumen measurement complies with IES LM-79-08 testing procedures

† L70 = 70% lumen maintenance (when light output drops below 70% of initial output).

Ambient luminaire temperatures specified. Lumen maintenance calculations are based on lifetime prediction graphs supplied by LED source manufacturers. Calculations for white-light LED fixtures are based on measurements that comply with IES LM-80-08 testing procedures. Refer to www.philipscolorkinetics.com/support/appnotes/lm-80-08.pdf for more information.



CHROMACORE[®] | OPTIBIN[®] | POWERCORE[®]
CKTECHNOLOGY | CKTECHNOLOGY | CKTECHNOLOGY

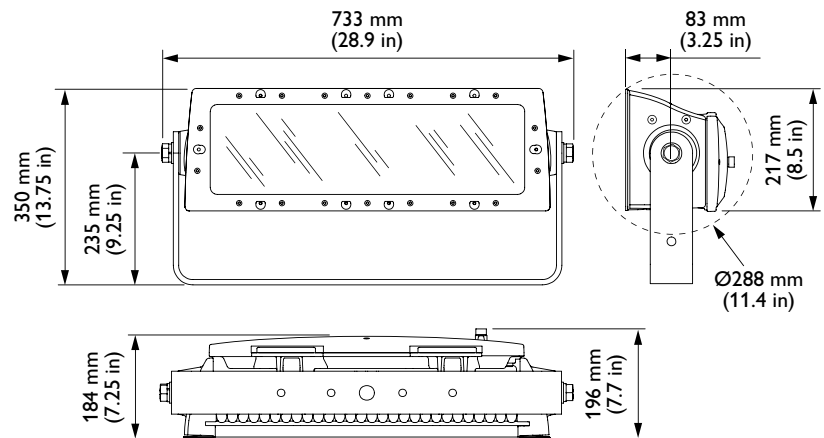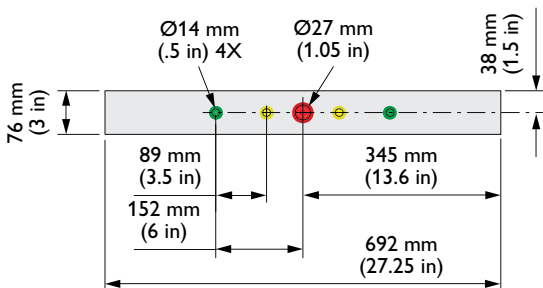

Fixture and Accessories

ColorReach Compact Powercore fixtures are part of a complete line-voltage system which includes fixtures and:

- One or more Data Enabler Pro devices.
- Any Philips Color Kinetics controller, including Light System Manager, iPlayer 3, and ColorDial Pro, or a third-party controller.
- One 1.8 m (6 ft) leader cable to connect each ColorReach Compact Powercore fixture to a junction box or Data Enabler Pro.
- 4-conductor copper wire to connect ColorReach Compact Powercore fixtures in series or in parallel. Standard 12 AWG (2.05 mm) stranded wire is recommended.

Item	Type	Item Number	Philips 12NC
ColorReach Compact Powercore	UL / cUL	123-000154-00	912400130183
<i>Includes 10 ft (3 m) leader cable</i>	CE / PSE	123-000154-01	912400130195

ColorReach Compact Powercore	CQC	123-000078-02	912400130193
<i>Includes 6 ft (1.8 m) leader cable</i>			

Leader Cable, 100–277 V,AC	UL	3 m (10 ft)	108-000055-03	910503704066
		15.2 m (50 ft)	108-000055-00	910503703137
UL / CE	CE / PSE	3 m (10 ft)	108-000055-04	910503704067
		15.2 m (50 ft)	108-000055-01	910503704064

Leader Cable, 100–240 VAC, CQC	CQC / CE	1.8 m (6 ft)	108-000043-03	910503700454
--------------------------------------	----------	--------------	---------------	--------------

Spread Lens with bezel	13°	120-000068-00	910503700506
	23°	120-000068-01	910503700507
	40°	120-000068-02	910503700508
	63°	120-000068-03	910503700509
	Asymmetric (5° x 17°)	120-000068-04	910503700510
	8°	120-000068-05	910503700511

Data Enabler Pro	3/4 in / 1/2 in NPT (U.S. trade size conduit)	106-000004-00	910503701210
	PG21 / PG13 (metric size conduit)	106-000004-01	910503701211

Use Item Number when ordering in North America.

Custom Configurations

In addition to the standard configurations listed here, custom configurations are also available with a non-standard color and color temperature. See the ColorReach Compact Powercore Ordering Information sheet at www.philipscolorkinetics.com/ls/rgb/colorreachcompact/ for complete details.

Component	Available Non-Standard Options
Color Temperature	2700K, 3000 K, 3500 K, 4000 K, 5000 K, 5500 K, 6000 K, 6500 K
Color	Royal Blue, Blue, Green, Amber, Red

Installation

ColorReach Compact Powercore, a high-performance exterior architectural floodlight with light projection of up to 448 ft (136.6 m), is designed to brilliantly and dynamically illuminate prominent, signature façades. Because each ColorReach Compact Powercore fixture weighs 51 lb (23 kg), you may need two people to lift the fixture out of the box and position it in the mounting location. Optional accessory optics require the installation of both a spread lens and a bezel on each half of the fixture.

Owner / User Responsibilities

It is the responsibility of the contractor, installer, purchaser, owner, and user to install, maintain, and operate ColorReach Compact Powercore fixtures in such a manner as to comply with all applicable codes, state and local laws, ordinances, and regulations. Consult with the appropriate electrical inspector to ensure compliance.

Installing in Damp or Wet Locations

When installing in damp or wet locations, you must seal all junction boxes and Data Enabler Pro devices with electronics-grade RTV silicone sealant so that water or moisture cannot enter or accumulate in wiring compartments, cables, fixtures, or other electrical parts. You must use suitable outdoor-rated junction boxes when installing in wet or damp locations. Additionally, you must use gaskets, clamps, and other parts required for installation to comply with all applicable local and national codes.

✳️ Refer to the ColorReach Compact Powercore Installation Instructions for specific warning and caution statements.


Prepare for the Installation

1. Refer to the lighting design plan, architectural diagram, or other diagram that shows the physical layout of the installation to identify the locations of all switches, controllers, Data Enabler Pro devices, fixtures, and cables.


✳️ To streamline the configuration of complex installations, record the serial number (DMX) or IP address (Ethernet) and location of each Data Enabler Pro.

ColorReach Compact Powercore fixtures can be installed in series or in parallel (wired to a common junction box). The maximum number of fixtures each Data Enabler Pro can support depends on specific configuration details such as fixture spacing, circuit size, line voltage, and method of connection (in series or in parallel). For more information, and for help calculating the number of fixtures your specific installation can support, download the Configuration Calculator from www.philipscolorkinetics.com/support/install_tool/, or consult Application Engineering Services at support@colorkinetics.com.

In addition to maximum fixture run lengths determined by the electrical configuration, each Data Enabler Pro imposes maximum run lengths based on data integrity. To ensure data integrity, maximum individual run length should not exceed 175 feet (53.3 m), and the total cable length per Data Enabler Pro should not exceed 400 feet (122 m).

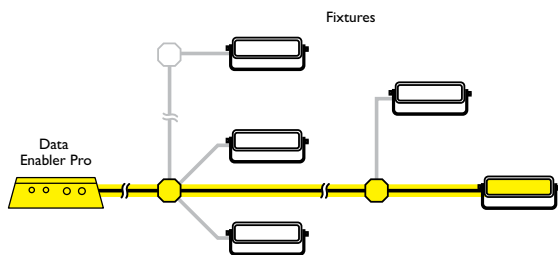

Data Integrity – maximum individual length 175 ft (53.3 m)

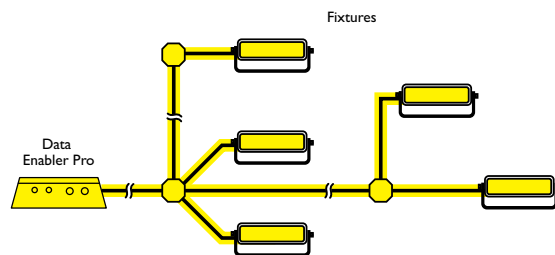


Data Integrity – total length 400 ft (122 m)

2. Ensure that the fixture mounting locations and substrates are sufficiently sturdy to bear the weight of each ColorReach Compact Powercore fixture. Pre-drill holes in the mounting substrate if necessary, making reference to the mounting bracket dimensions. Use at least two screws to secure each fixture, one on either side of the mounting bracket's central screw hole.

If mounting ColorReach Compact Powercore on a lighting pole, make sure the pole can both support the total weight of the fixtures and withstand the maximum velocity winds to which it will be subjected. Each fixture weighs 51 lb (23 kg), and has an effective projected area (EPA) of 0.186 m².



3. Install all Data Enabler Pro devices, including any interfaces with controllers. Data Enabler Pro and external controllers send power and control signals to fixtures over the single leader cable.
4. Verify that all additional supporting equipment (switches, controllers) is in place.
5. Ensure that all additional parts and tools are available, including:
 - A 28 mm hex or adjustable wrench for adjusting the locking bolts on the fixture bracket.
 - One electrical junction box per fixture, rated for your application. (Refer to the junction box manufacturer's literature for additional items required for mounting or sealing.)
 - A sufficient length of 4-conductor copper wire. We recommend 12 AWG (2.05 mm) stranded wire.
 - Conduit as required.
 - Electronics-grade room temperature vulcanizing (RTV) silicone sealant.

Mounting bracket dimensions for pre-drilling

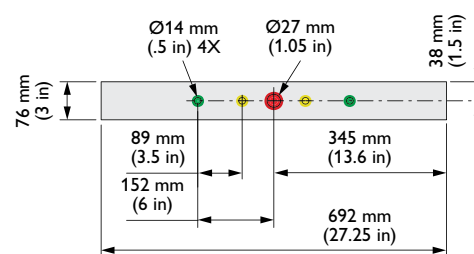

Unpack the Fixtures

1. Unpack ColorReach Compact Powercore fixtures. Because each ColorReach Compact Powercore fixture weighs 51 lb (23 kg), you may need two people to lift the fixture out of the box and position it in the mounting location.
2. Each ColorReach Compact Powercore fixture comes pre-programmed with a unique serial number. As you unpack the fixtures, record the serial numbers in a layout grid (typically a spreadsheet or list) for easy reference and light addressing.
3. Assign each fixture to a position in the lighting design plan.

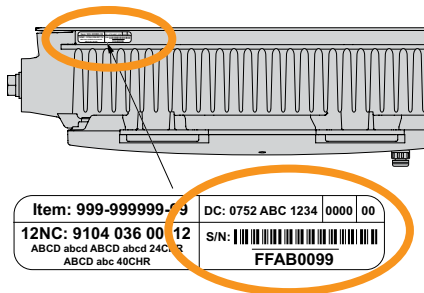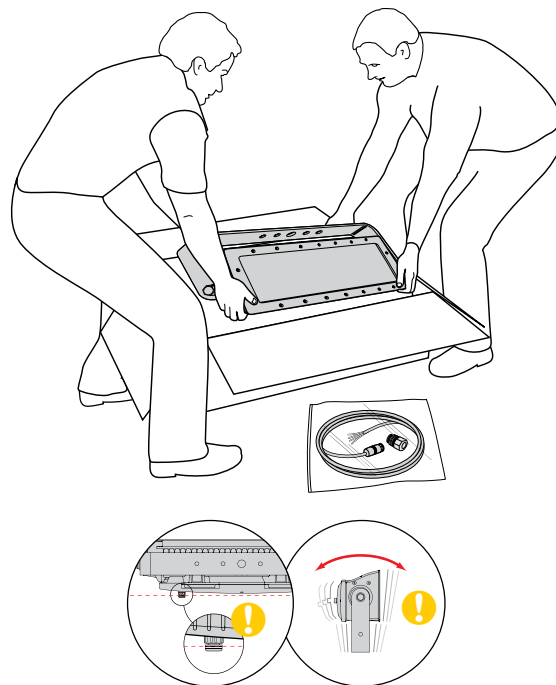



4. To streamline installation and aid in light show programming, you can affix a weatherproof label identifying the order or placement in the installation to an inconspicuous location on each light fixture's housing.


⚠ Do not rest ColorReach Compact Powercore on its back, as doing so may damage the connector port. Be careful not to tip the fixture over during positioning.

Attach Spread Lenses (Optional)


Exchangeable ColorReach Powercore gen2 spread lenses of 8°, 13°, 23°, 40°, 63°, and an asymmetric 17° x 5° support a variety of photometric distributions for a multitude of applications, including spotlighting, wall grazing, and asymmetric wall washing. Each half of ColorReach Powercore gen2 can be individually addressed and controlled, and you can install different spread lenses on each half of the fixture's housing for precise control of light diffusion.

1. Unpack and confirm the contents of the box. Each box contains one lens kit, consisting of a spread lens with attached rubber gasket, and a bezel with 10 captured mounting screws.
2. Clean both sides of the spread lens and the face of the ColorReach Powercore gen2 housing, including glass surfaces, using a mild, non-abrasive cleaner. Ensure that all surfaces are dry, and that the gasket is properly fitted to the lens.
3. Position the spread lens so that the beam-angle designation on the side of the lens is face up. Handle the spread lens by the gasket, making sure not to touch or soil either surface of the spread lens.

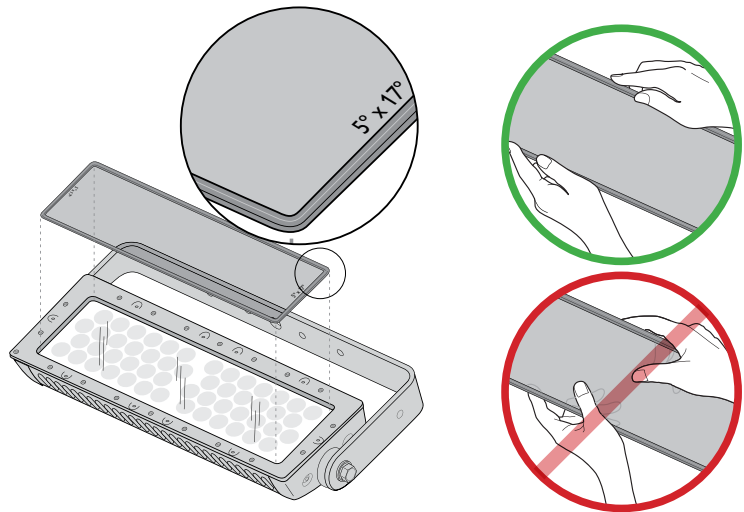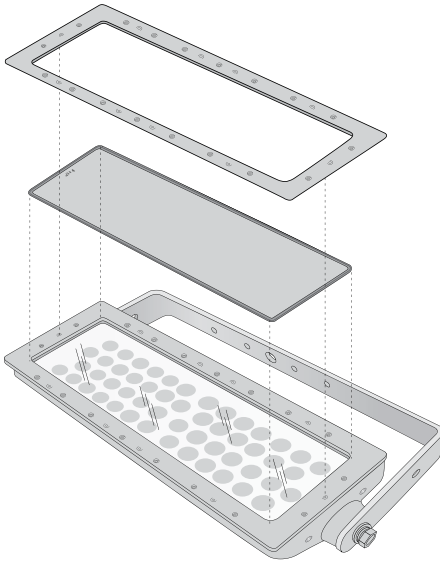


 For installation in extreme environments, refer to the Reach Spread Lens Kit Installation Instructions for details on sealing the spread lens and bezel to prohibit water ingress.


4. Place the spread lens on top of the ColorReach Powercore gen2 housing. Make sure that the spread lens and gasket are seated properly within the fixture housing. Also make sure that there is no moisture between the spread lens and the glass, as any moisture will compromise the effectiveness of the spread lens.

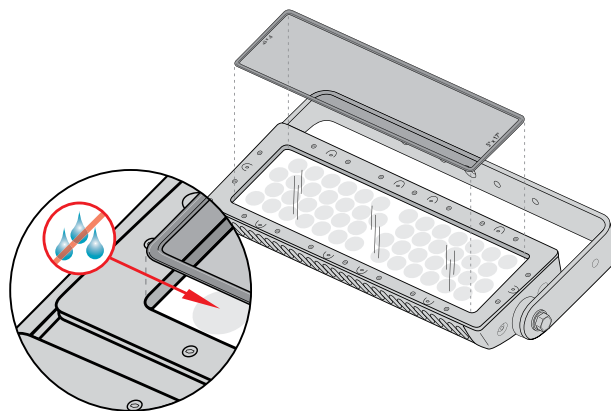


5. Position the bezel over the spread lens.

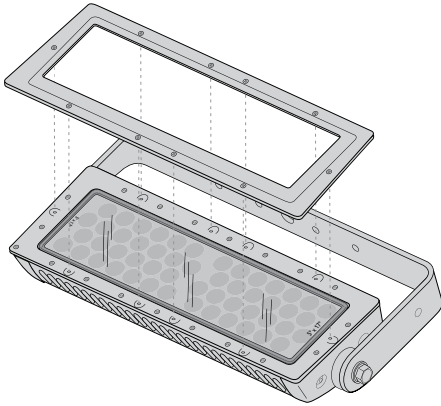

6. With a standard #2 Phillips screwdriver, attach the bezel to the fixture housing using the screws provided. To ensure a watertight seal, tighten the screws to approximately 20 – 30 in-lbs (2.2 – 3.4 Nm) in the sequence shown below.

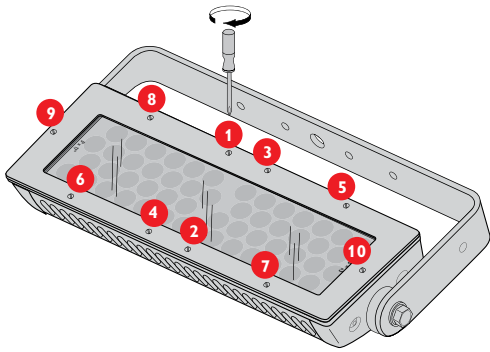


Leader Cable connector dimensions

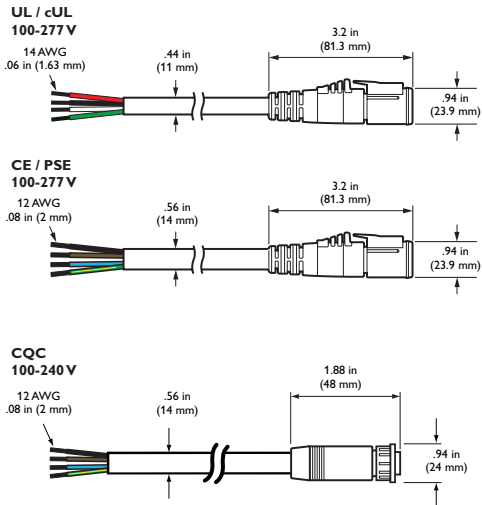


Position and Mount Fixtures

1. Position each ColorReach Compact Powercore fixture in its designated mounting location. Make sure the mounting area is clear of debris and other obstructions.
2. Loosen the locking bolts, using a 28 mm hex or adjustable wrench, and rotate the fixture to access the mounting bracket. Tilting the fixture 90° affords 9.1 in (231 mm) clearance.

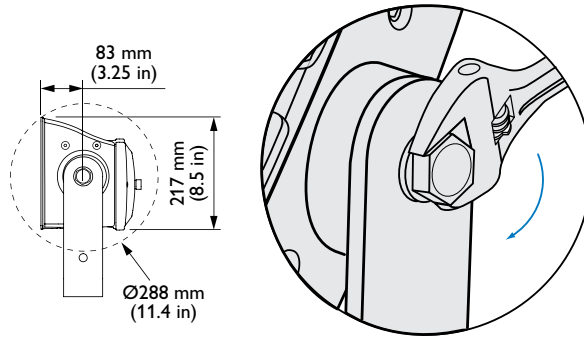

3. If mounting holes have been pre-drilled, align the mounting bracket's screw holes with the pre-drilled holes. Mount the fixture bracket using hardware appropriate for the mounting substrate. Use at least two screws to secure each fixture, one on either side of the mounting bracket's central screw hole.

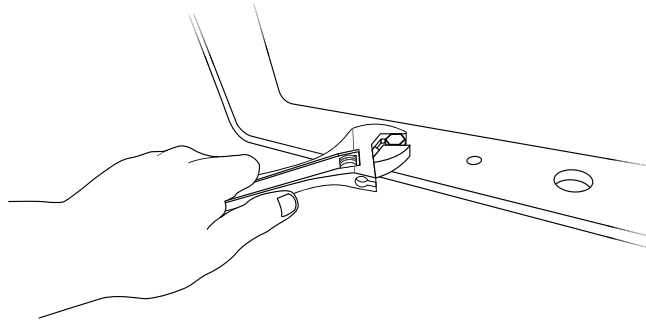



Connect the Fixtures

Make sure the power is OFF before connecting ColorReach Compact Powercore fixtures.

1. Mount junction boxes in accordance with the lighting design plan.
2. If installing fixtures in a series, pull 4-conductor copper wire between each junction box in the series.
If installing fixtures in parallel, pull 4-conductor copper wire from a common junction box to each fixture's junction box.


The maximum cable run from a Data Enabler Pro to any individual ColorReach Compact Powercore fixture is 175 feet (53 m). When installing in parallel, the total cable length cannot exceed 400 feet (122 m).

- If necessary, remove the connector cap from the port on the back of the ColorReach Compact Powercore housing. Insert the leader cable into the port. Turn the leader cable's lock nut to the right until it locks into place.

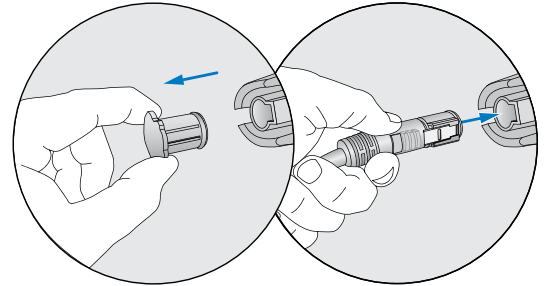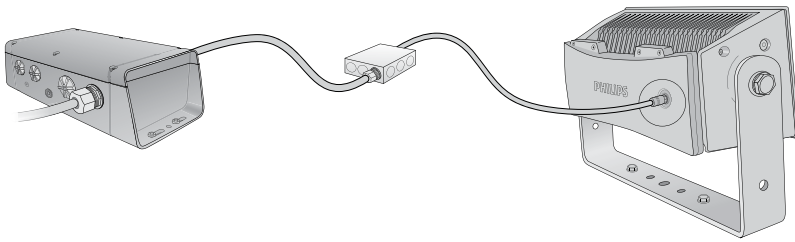


UL / CE (100–277 VAC)


- Use wire nuts to connect line, neutral, ground, and data. If installing in series, connect the leader cable from each fixture to the fixture's junction box. If installing in parallel, connect the leader cable from each fixture to the lead wire from the Data Enabler Pro in the common junction box.
- Tuck wire connections into the junction box.
- Seal all junction boxes with electronics-grade RTV silicone sealant. Use gaskets, clamps, and other parts and fittings required to comply with local outdoor wiring codes.

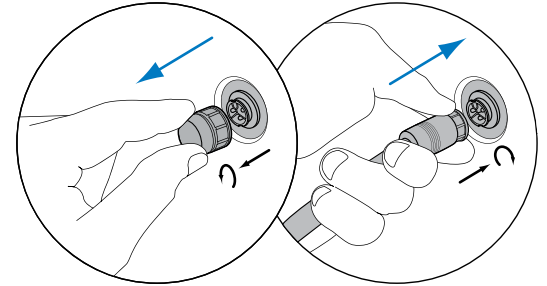


CQC (100–240 VAC)

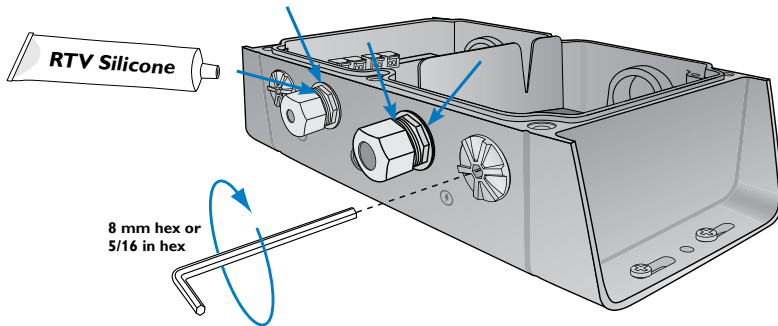

- Run the wiring from the first junction box in the series to the Data Enabler Pro, or, if installing in parallel, run the wiring from the common junction box to the Data Enabler Pro. Secure connections within the Data Enabler Pro housing.

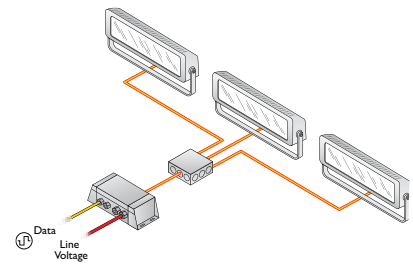

ColorReach Compact Powercore fixtures installed in parallel

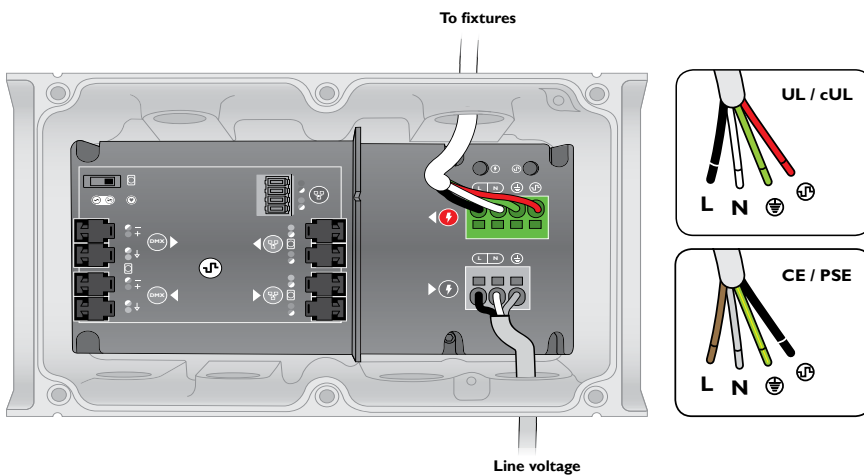

- Secure the Data Enabler Pro cover. Seal the Data Enabler Pro with electronics-grade RTV silicone sealant.

Address the Fixtures

Make sure the power is ON before addressing and configuring fixtures.

ColorReach Compact Powercore fixtures operate in 8-bit mode by default. You can configure ColorReach Compact Powercore to operate in 16-bit mode, which increases fixture resolution for smoother dimming.

In 8-bit mode, fixtures use one DMX address per LED channel (red, green, and blue). In 16-bit mode, fixtures use two DMX addresses per LED channel. The first DMX address corresponds to the “coarse” data for that channel, and the second corresponds to the “fine” data. By using double the number of DMX addresses, 16-bit mode increases fixture resolution from 256 dimming steps to 65,536 (256 x 256) dimming steps.

DMX Channel Assignments						
8-Bit Mode	1		2		3	
	Red		Green		Blue	
16-Bit Mode	1	2	3	4	5	6
	Red Coarse	Red Fine	Green Coarse	Green Fine	Blue Coarse	Blue Fine

* You can address fixtures and switch between 8-bit mode and 16-bit mode using QuickPlay Pro. You can download QuickPlay Pro from www.philipscolorkinetics.com/support/addressing/

* You will need the layout grid that you created when you recorded the serial numbers of the light fixtures in your installation.

Each 1 ft (305 mm) ColorReach Compact Powercore node comes factory-addressed with a starting DMX address of 1. For lighting designs where fixture nodes work in unison, all nodes can be assigned the same DMX addresses. Changes to the default addresses are not necessary, but if nodes were previously readdressed for use in other installations, you must reset them. For light show designs that show different colors on different nodes, you must assign unique DMX addresses to your nodes and sort them in a useful order.


- In Ethernet installations, you can address and configure fixture nodes using QuickPlay Pro with a computer connected to your lighting installation’s network. QuickPlay Pro can automatically discover all fixture nodes, controllers, and Data Enabler Pro devices for quick configuration.
- In DMX installations, you can address and configure fixture nodes using QuickPlay Pro with iPlayer 3 or SmartJack Pro. You can manually enter fixture node serial numbers, or you can import a spreadsheet listing each fixture node’s serial number and starting DMX address.

For details on addressing and configuring fixtures, controllers, and power / data supplies with QuickPlay Pro, refer to the *Addressing and Configuration Guide*, which you can view or download at www.philipscolorkinetics.com/support/addressing.

Aim and Lock the Fixtures


Make sure power is ON before aiming fixtures.

1. Aim the fixtures by rotating each fixture to the correct angle.
2. Lock the fixtures by tightening the locking bolts using a 28 mm hex or adjustable wrench.

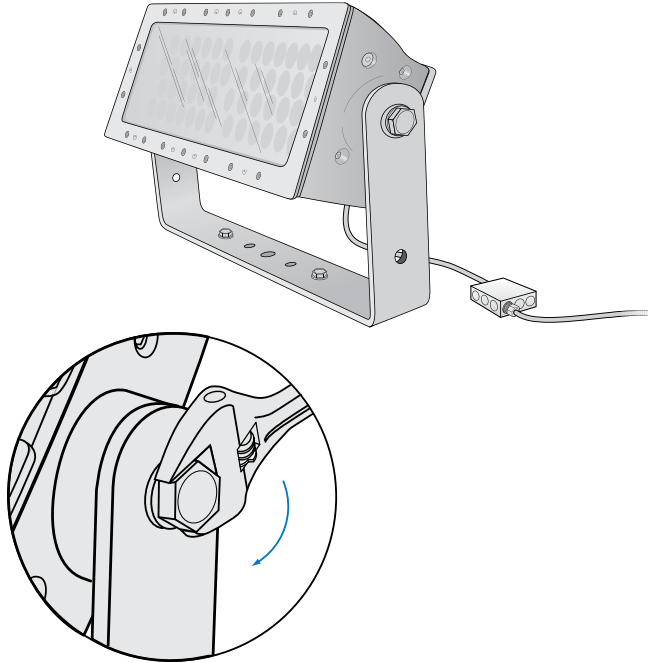

⚠ Do not look directly into the fixture when aiming and locking.

⚠ For exterior applications with direct exposure to water, ColorReach Compact Powercore fixtures should not be aimed directly upwards, as water may pool on the lens and affect beam quality. Instead, the fixture should be angled to allow for proper water drainage.

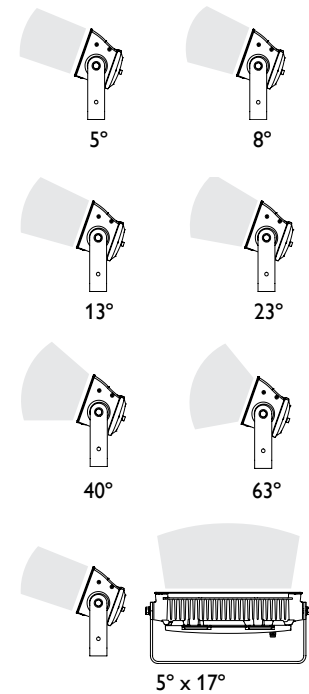

Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com

Copyright © 2012–2014 Philips Solid-State Lighting Solutions, Inc. All rights reserved.
Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, eW Fuse, DIMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice.
Cover Photo: Eden Park, Auckland, New Zealand,
by Patrick Reynolds

DAIS-000109-00 R01 5-14