



ETC Quick Guide

Source Four LED™ Profile

Overview

For complete information and step-by-step instructions, see the *Source Four LED Profile User Manual*. ETC documentation can be downloaded at www.etconnect.com.

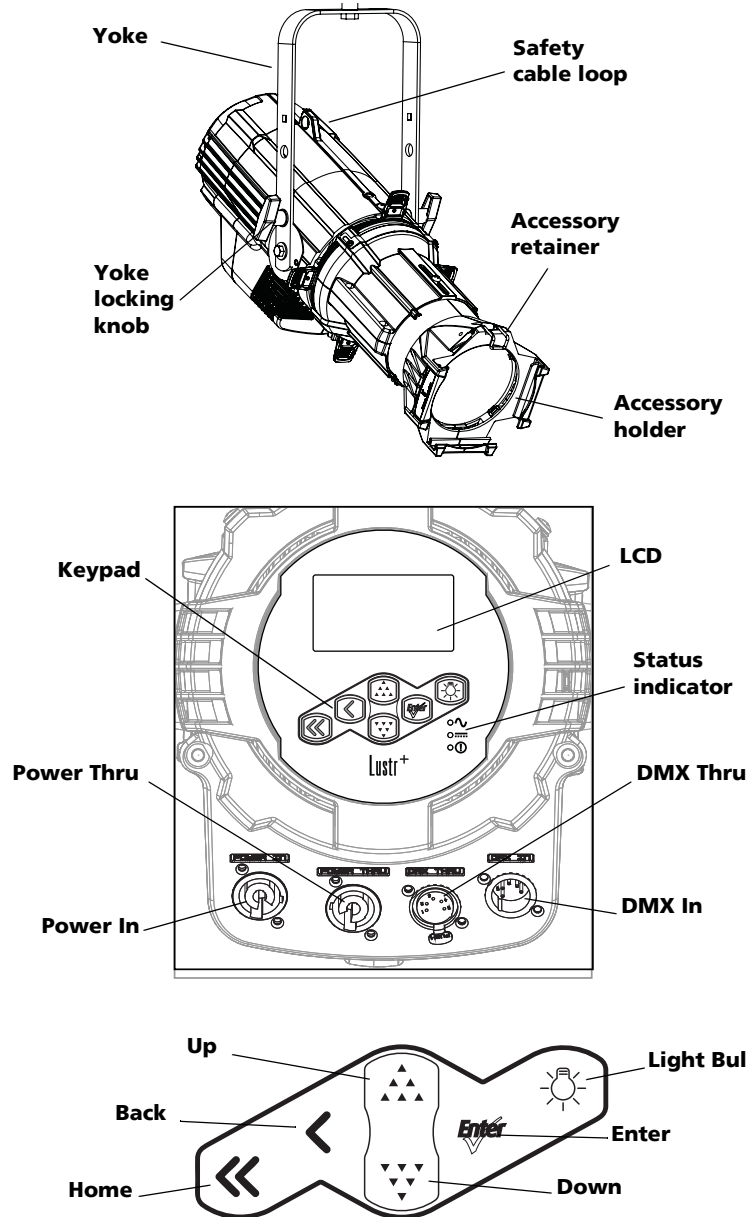


Power – Indicates AC power is On.
DMX – Indicates control signal is Active.
Error – Indicates data error, high temperature, or other unusual status.

ETC Quick Guide

Source Four LED Profile


Install

Lens Tube

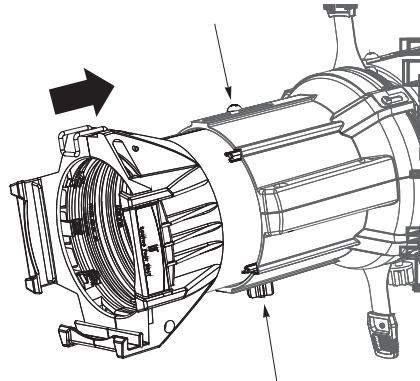

- Step 1: Slide the lens tube into the shutter barrel.
- Step 2: Tighten the lens zoom knob.
- Step 3: Tighten the Phillips screw at the top of the lens barrel.

Install Fixture

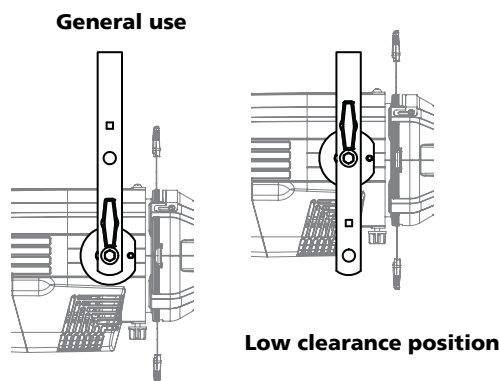

- Step 1: Hang or mount the fixture.
- Step 2: Attach a safety cable.
- Step 3: Insert additional accessories such as a top hat, etc.




WARNING: *Use only hardware rated for total weight of fixture and accessories. A safety cable (or other approved safety device) must be securely attached to the safety cable loop before loosening the clamp.*

Disconnect the unit from power and DMX and allow the fixture to cool before removing or installing the shutter barrel or other adapters, and all cleaning and maintenance.

ETC Quick Guide

Source Four LED Profile

Connect

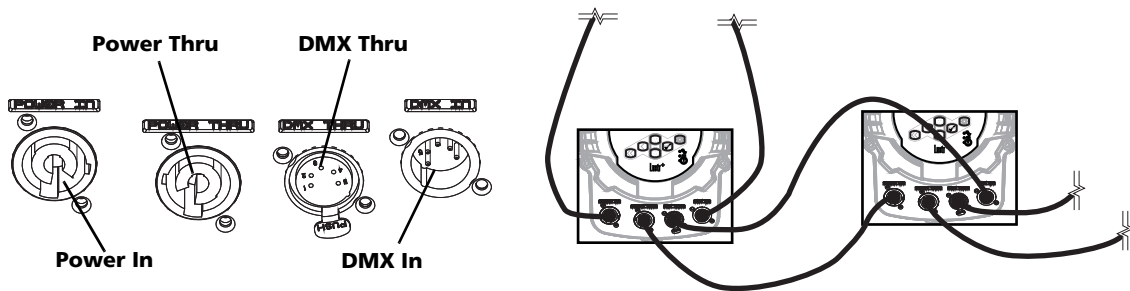

- Step 1: Attach the power cable to the Power In connector.
- Step 2: Attach the 5-pin XLR cable to the DMX In connector (if using external control).
- Step 3: Connect the power cable to AC power.
- Step 4: Plug the XLR cable (if using) into the data source.
- Step 5: Link additional fixtures via Power Thru and DMX Thru connectors.









WARNING: No more than nine total Source Four LED (four total Series 2 Lustr) fixtures on Power Thru (non-dimming, 100 to 240 VAC, 50/60 Hz).
Up to 32 device loads can be on one DMX daisy-chain.

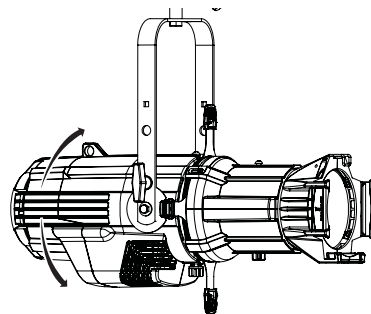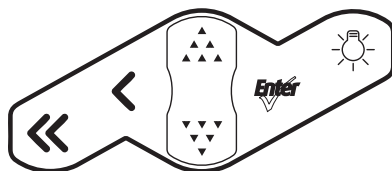

WARNING: The fixture must be connected to a non-dimmable power source in order to avoid damage to its internal power supply and other electrical components. Dimming will damage the fixture and void the warranty.

Focus




- Step 1: Supply power and wait for the fixture to boot up.
- Step 2: Press [] to open the **Presets & Sequences** menu.
- Step 3: Select **Focus** and press [] to turn on the LED array.
- Step 4: Adjust the fixture to the desired position.
- Step 5: Once focus is set, press [] to turn off the LED array and then [] to return to home screen.

ETC Quick Guide

Source Four LED Profile

Soft Focus Diffuser

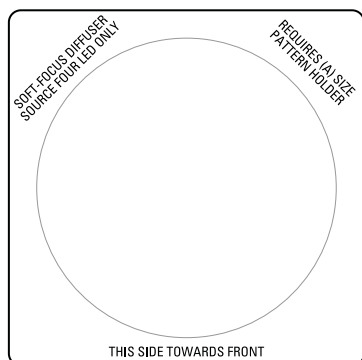

Step 1: Install the diffuser into an A-Sized Pattern holder.

Step 2: Install a pattern in front of the diffuser, if needed.

Step 3: Insert the pattern holder with diffuser into the Pattern holder slot, making sure the writing on the diffuser faces the front of the fixture.

Address

Step 1: From the home screen, press **[Enter]** to open the **Main Menu**.

Step 2: In the **Main Menu**, scroll to **DMX Start Address**, press **[Enter]**.

Step 3: Use **[▲▲▲]** or **[▼▼▼]** to scroll to the desired fixture address.

Step 4: Press **[Enter]** to select the address number.

Step 5: Press **[<<]** to return to the home screen.

* DMX address is not needed if using standalone or master/slave control.

Features

Quick Color

(Lustr+ and Series 2: Lustr, Daylight HD, Tungsten HD, and Studio HD)

Quick Color allows you to easily select a color and its intensity from a predefined menu. This feature overrides any presets or sequences previously selected and is only available when there is no external DMX signal to the fixture.



Note:

Exiting the Quick Color menu will return the fixture to the state it was in prior to entering the menu.

To select a Quick Color:

Step 1: Within the **Presets and Sequences** screen, scroll to **Quick Color** and press **[Enter]**.

Step 2: Scroll to **Color** and press **[Enter]**.

Step 3: Scroll to the desired color and press **[Enter]**.

Step 4: Scroll to **Intensity** and press **[Enter]**.

Step 5: Scroll to adjust the fixture's intensity and press **[Enter]** to commit the selection.


ETC Quick Guide

Source Four LED Profile

Step 6: To exit the Quick Color menu, press [◀◀].

Quick Setup

Step 1: On the **Main Menu**, scroll to **Quick Setups** and press [].

Step 2: Scroll to the desired setup and then press [].
An asterisk (*) indicates which setup is active.

Step 3: Press [◀◀] to return to the home screen.
The top line of the home screen displays the name of the active setup.

Individual features and settings are adjustable under the Advanced menu. Consult the User Manual for more information on advanced features of Source Four LED fixtures.

Lustr+ and Series 2: Lustr, Daylight HD, Tungsten HD, and Studio HD

Quick Setup	Profile	Features	Recommended For:
General	Direct	Standard dimming curve, regulated output for color consistency.	Factory default: for general purpose use, including interior architectural applications.
Stage	HSI Plus 7 enabled	Incandescent dimming curve, regulated output for color consistency, 3200K white point setting.	Theatrical lighting: duplicates the color and dimming behavior of tungsten and stage lighting fixtures.
High Impact	RGB	Quick dimming curve, boost mode for maximum intensity, 5600K white point setting.	Event lighting: enables quick response, simple RGB control and strobe channel for maximum effect usage.
Studio	Studio	Linear dimming curve, regulated output mode for color consistency.	Studio factory default: enables three-parameter control of white light (intensity, white point, and tint) via DMX from a console or console-free fixture display.

Tungsten and Daylight

Quick Setup	Profile	Features	Recommended For:
Studio	Studio	Linear dimming curve, regulated output for intensity stability.	Enables control of intensity from luminaire's user interface; no console required.
Single Channel	Direct	Standard dimming curve, regulated output for color consistency.	For general purpose architectural use.
Stage	Direct	Incandescent dimming curve, regulated output.	Matches conventional luminaire performance.

ETC Quick Guide

Source Four LED Profile

DMX Profiles

Lustr+ and Series 2: Lustr, Daylight HD, Tungsten HD, and Studio HD

DMX Profile	DMX Channels	Channel Assignments	Notes
Direct	10	See Channel assignments in direct mode chart below.	Direct control of each individual color with a separate master intensity channel. Color calibration of LEDs is not active in this mode. The ten-channel profile will produce the highest quality color cross fades.
RGB	6 (Ch. 4 not used)	1-Red	Effectively addresses all seven colors via three channels of control. RGB profile will produce medium quality color cross-fades.
		2-Green	
		3-Blue	
		4 - n/a	
		5 - Strobe	
		6-Fan Control	
HSI	6	1 - Hue (coarse)	High resolution hue (two channels), saturation, and intensity control. HSI mode will produce color cross-fades around the color space.
		2 - Hue (fine)	
		3 - Saturation	
		4 - Intensity	
		5- Strobe	
		6 - Fan Control	
HSIC	7	1 - Hue (coarse)	High-resolution hue, saturation, and intensity control as above, with the addition of a color point channel to adjust the color temperature of the fixture in both white light and color. Color cross-fade performance is the same as HSI.
		2 - Hue (fine)	
		3 - Saturation	
		4 - Intensity	
		5 - Strobe	
		6 - Fan Control	
		7-Color Point (CCT)	
Studio	6 (Ch. 4 not used)	1 - Intensity	Controls fixture as a white light unit. If no DMX is present, (i.e. console input), a fixture can be adjusted for these three parameters on the UI at the back of the unit.
		2 - Color Point (CCT)	
		3 - Tint	
		4 - n/a	
		5 - Strobe	
		6 - Fan Control	
Additional profile options (on following page)			
Plus 7	Seven additional precision color-control override channels are available for use with RGB, HSI, and HSIC input profile settings. For example HSI with 'Plus 7' enabled becomes an 15-channel profile:		The desired color and intensity are achieved by using the HSI or RGB channels. Placing the Plus7 channel at a value over 51% gives the fixture additional channels in its profile. Channels 9-15 represent the native colors of the fixture and allow the operator to adjust individual color channels to fine tune the color output.
	See Plus7 profile options chart below		
Strobe	Variable strobe control: 0% is no strobe. The fixture output will strobe more rapidly as the strobe channel value approaches 100%.		

ETC Quick Guide

Source Four LED Profile

Channel assignments in direct mode

Channel Number	Series 1 Studio HD	Series 1 Lustr+	Series 2 Lustr	Series 2 Daylight HD	Series 2 Tungsten HD
1	Red	Red	Red	Red	Red
2	Red Orange	White	Lime	(not used)	Red Orange
3	Mint	Amber	Amber	Mint	Mint
4	Blue	Green	Green	Blue	Blue
5	Indigo	Cyan	Cyan	Indigo	Indigo
6	n/a	Blue	Blue	n/a	n/a
7	n/a	Indigo	Indigo	n/a	n/a
8	Intensity	Intensity	Intensity	Intensity	Intensity
9	Strobe	Strobe	Strobe	Strobe	Strobe
10	Fan Control	Fan Control	Fan Control	Fan Control	Fan Control

Plus7 profile options

Channel Number	Series 1 Studio HD	Series 1 Lustr+	Series 2 Lustr	Series 2 Daylight HD	Series 2 Tungsten HD
1	Hue (course)	Hue (course)	Hue (course)	Intensity	Intensity
2	Hue (fine)	Hue (fine)	Hue (fine)	White Point	White Point
3	Saturation	Saturation	Saturation	Tint	Tint
4	Intensity	Intensity	Intensity	(not used)	(not used)
5	Strobe	Strobe	Strobe	Strobe	Strobe
6	Fan Control	Fan Control	Fan Control	Fan Control	Fan Control
7	(not used)	(not used)	(not used)	(not used)	(not used)
8	Plus7 Control on/off	Plus7 Control on/off	Plus7 Control on/off	Plus7 Control on/off	Plus7 Control on/off
9	Red	Red	Red	Red	Red
10	Red Orange	White	Lime	(not used)	Red Orange
11	Mint	Amber	Amber	Mint	Mint
12	Blue	Green	Green	Blue	Blue
13	Indigo	Cyan	Cyan	Indigo	Indigo
14	(not used)	Blue	Blue	(not used)	(not used)
15	(not used)	Indigo	Indigo	(not used)	(not used)

Tungsten and Daylight

DMX Profile	DMX Channels	Channel Assignments	Notes
Studio	3	1 - Intensity	Control of parameters is also enabled from the luminaire's user interface. No console is required.
		2 - Strobe	
		3 - Fan Control	
Direct	3	1 - Intensity	
		2 - Strobe	
		3 - Fan Control	

ETC Quick Guide

Source Four LED Profile

Typical Power Consumption

Lustr+

	90V	120V	240V
Idle Power / Current	4.27W / 0.084A	4.38W / 0.079A	4.2W / 0.068A
100% Boost Power / Current	130.8W / 1.48A	129.9W / 1.11A	126.4W / 0.576A

Series 2 Lustr

	90V	120V	240V
Idle Power / Current	6.77W / 0.144A	6.9W / 0.149A	6.5W / 0.155A
100% Boost Power / Current	173.0W / 1.94A	171.0W / 1.44A	168.0W / 0.783A

Studio HD

	100V	120V	240V
Idle Power / Current	5.69W / 0.096A	5.71W / 0.091A	5.35W / 0.073A
100% Boost Power / Current	129.2W / 1.3A	127.1W / 1.07A	126.2W / 0.564A

Daylight

	90V	120V	240V
Idle Power / Current	4.3W / 0.083A	4.35W / 0.077A	4.04W / 0.066A
100% Boost Power / Current	165.2W / 1.87A	163.3W / 1.39A	160.3W / 0.718A

Tungsten

	100V	120V	240V
Idle Power / Current	4.3W / 0.085A	4.35W / 0.078A	4.0W / 0.065A
100% Boost Power / Current	159.8W / 1.81A	157.4W / 1.35A	154.8W / 0.695A

Series 2 Daylight HD

	100V	120V	240V
Idle Power / Current	5.58W/0.093A	5.69W/0.088A	4.9W/0.06A
100% Boost Power / Current	246.6W/2.481A	245.2W/2.58A	242.3W/1.111A

Series 2 Tungsten HD

	100V	120V	240V
Idle Power / Current	5.64W/0.095A	5.71W/0.091A	4.9W/0.061A
100% Boost Power / Current	210.1W/2.115A	208.5W/1.752A	205.4W/0.963A

Supplied by:



Melbourne
03 9701 2500

Sydney
02 9737 8988

info@lightmoves.com.au www.lightmoves.com.au