


Installation Sheet

DALI controlled mains switch

digidim


491

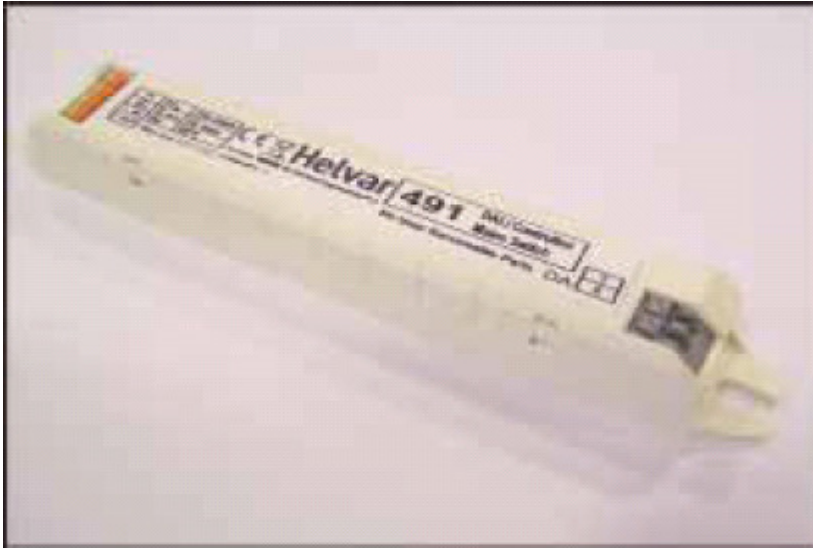


Load Rating:	2 A (max)
Helvar 's' Ballasts:	3 (max)
Voltage Range:	200-265V AC
Mains Frequency:	45-65 Hz
Power Consumption:	1.3 W (max)
DALI Controlled	(IEC 60929)
Ambient Range:	0 - 50 degC
Weight:	35 grams

DALI mains switch, intended for installation inside luminaires or electrical cabinets.

Can be used with fixed output electronic ballasts, enabling them to be added to a DALI network. A maximum load of 3 Helvar 's' series electronic ballasts may be connected.

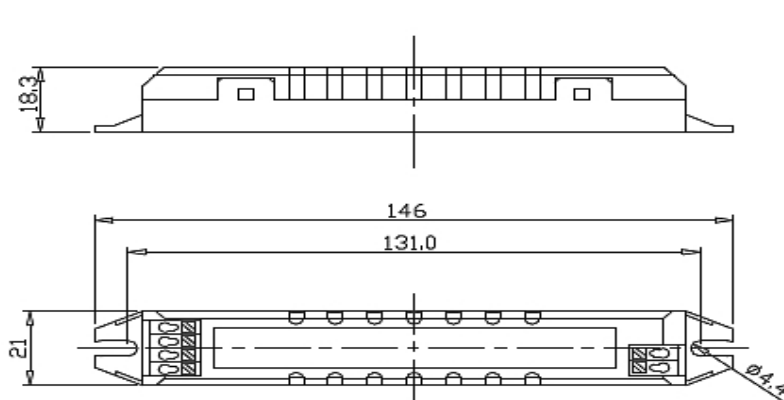

Push-fit terminals accept 0.5 to 1.5 mm sq. solid core wire. Strip wire back 8 mm before insertion. Push-button allows wire release.

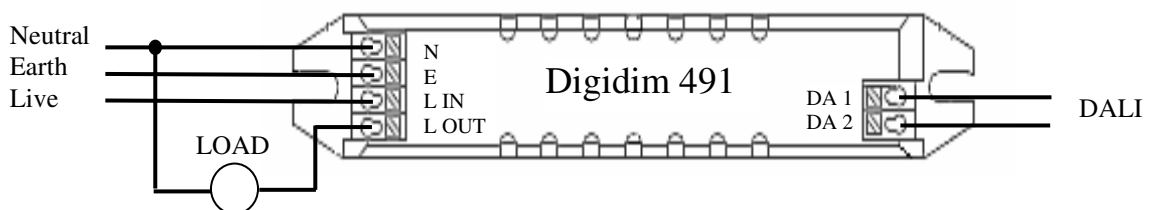

Out of box, the output will turn on when power is applied.

An external power supply is required for the DALI bus.

Helvar

www.helvar.com