

EnOcean Gateway (434)

The 434 EnOcean Gateway allows you to connect wireless and batteryless EnOcean controls to a Helvar DALI lighting network.

It can be mounted on the ceiling or on walls, and requires only a single electrical connection to a DALI network.

Once installed, the 434 will support up to 20 EnOcean switches without any other wiring. The switches are batteryless, thanks to energy-harvesting technology, and maintenance-free. Energy is generated by pressing the EnOcean button, and a radio signal is sent to the Gateway.

The EnOcean switches can be configured in just a few minutes using Helvar's Designer or Toolbox software.




Key Features

- Integrate wireless, batteryless switches into DALI network.
- Simple installation.
- Gateway is powered by the DALI network.
- Up to 20 switches can be integrated via one gateway.

Product Order Codes:

- EnOcean Gateway [868 MHz]: 434
- EnOcean Gateway/2 [928 MHz]: 434/2

Connections

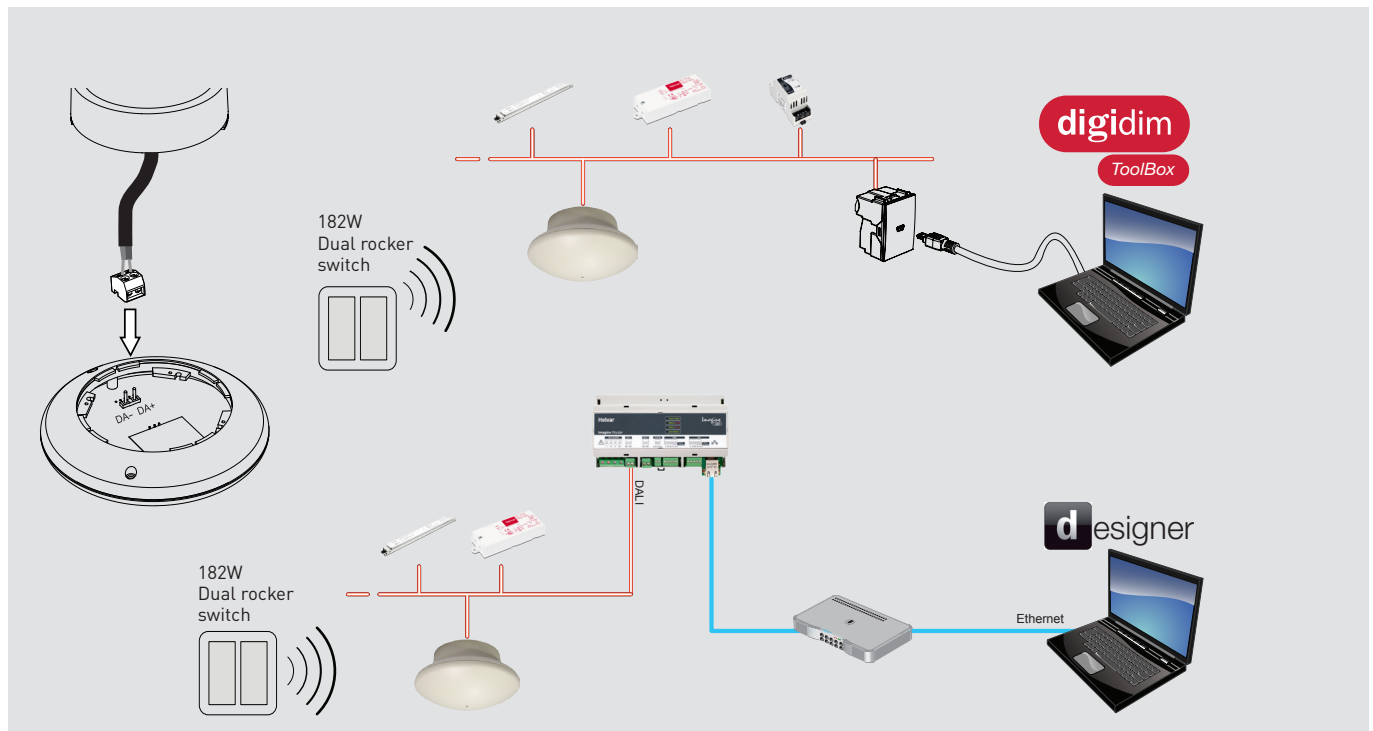

Technical Data

Connections

DALI: Removable 2-part connector block
Wire size: 0.5 mm² – 2.5 mm² solid or stranded

Cable rating: All cables must be mains rated.

Power

DALI supply input: 13 V – 22.5 V

DALI consumption: 20 mA

Operation

Operating frequency: 434: 868 MHz suitable for Europe and other countries adopting the RED directive.
434/R2: 928 MHz suitable for Japan adopting the ARIB specification.

Supported profile: EnOcean EEP F6-02-xx, F6-04-xx (PTM 210/215 normal mode)

Range (switches): Typical EnOcean Switches: 30 m (unobstructed space)

Max. number of switch units per gateway: 20

Mechanical data

Dimensions: 110 mm (∅) × 58 mm

Weight: 75 g

Colour: White: RAL 9002

IP code: IP30

Operating conditions

Ambient temperature: 0 °C to +50 °C

Relative humidity: Max. 90 %, noncondensing

Storage temperature: -10 °C to +70 °C


Conformity and standards

EMC: EN 55015
EN 61547

Safety: EN 60950-1

RED: EN 300220-2 (434)
EN 301489-3 (434)

ARIB: STD-T108 (434/2)



Wireless protocol: ISO/IEC 14543-3-10

Environment: Complies with WEEE and RoHS directives.

Status LED

EnOcean Receiver

Receives control commands from EnOcean switches (available separately).

Status LED: red or green.

In normal operation, the LED remains unlit.

The red LED flashes to indicate one of the following:

- FAST: DALI network in process of discovering the Gateway.
- FAST: Designer or Toolbox software identifying the Gateway.
- SLOW (every 1.25 s): Gateway is in Learning Mode.

The green LED flashes to indicate the following:

- The Gateway is in Learning Mode, and has detected a switch (received a signal from a switch unit).

Dimensions (mm)

