

LL1x110-E-CC-350

Helvar

1x110 W **Constant Current** LED driver


freedom in lighting

- Open & short circuit protection
- Constant current output: 350 mA
- Maximum 110 W load
- Protected up to 4 kV power network fast transients
- High efficiency 0.95
- Suitable for Class I luminaires

110 W 220-240 VAC 0/50-60 Hz



Connections

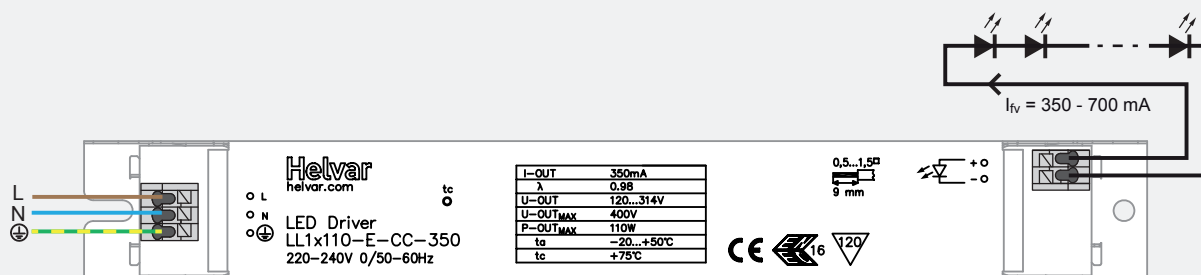

Note:

* Not suitable for load side switching operation.

Mains Characteristics

Voltage range	198-264 VAC,
DC range	176-280 VDC,
	starting voltage > 190 VDC
Max mains current at full load	0.40-0.60 A
Frequency	0 / 50 - 60 Hz
U-OUT _{max} (abnormal)	400 V

Load Output

Output current (I-OUT)	350 mA
Max output power	110 W
Efficiency, at full load, typical	0.95

I-OUT	350 mA
P-out (max)	110 W
U-OUT	120 - 314 V
λ	0.98
η @ max	0.95

Operating Conditions and Characteristics

Max.temperature at t_c point	75 °C
Ambient temperature range	-20...+50 °C
Storage temperature range	-40...+80 °C
Maximum relative humidity	no condensation
Lifetime	50 000h, at TC max (90 % survival rate)

Connections and Mechanical Data


Wire size	0.5 - 1.5 mm ²
Wire type	solid core and fine-stranded
Maximum driver to LED wire length	5 m
Weight	173 g
IP rating	IP20

Conformity

General and safety requirements	EN 61347-1
Particular safety requirements for d.c. or a.c. supplied electronic controlgear for LED modules, acc. to	EN 61347-2-13
Thermal protection class	EN61347, C5e
Mains current harmonics, acc. to	EN 61000-3-2
Limits for Voltage Fluctuations and Flicker, acc to	EN 61000-3-3
Radio Frequency Interference, acc. to	EN 55015
Immunity standard, acc. to	EN 61547
Performance requirements, acc to	EN 62384

Compliant with relevant EU directives
ENEC & CE marked

Note: See page 2 for dimensions

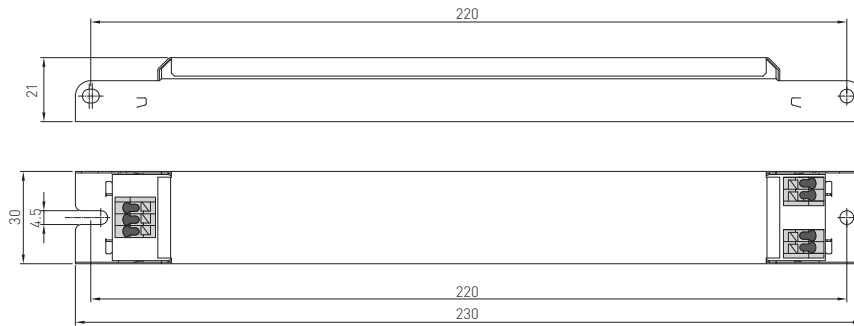

Wiring & connectivity

LL1x110-E-CC-350 LED driver is suited for in-built luminaire usage. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Specifications of the LED drivers may never exceed the operating conditions as per the product datasheets.

Wiring considerations

Wire type and cross section

- Please refer to datasheets connections & mechanical data

Wiring insulation

- According to recommendations in EN 60598

Maximum wire lengths

- Please refer to datasheets connections & mechanical data

Wire connections

- Please refer to datasheets connections diagram

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.

LED driver earthing

- LED drivers are designed to support different luminaire classifications, like Class I or Class II fittings (no earth required). Please check the individual LED driver type for its exact safety class rating.
- For Helvar LED drivers to have a reliable operation and EMC performance, the luminaires are expected to have an earth connection.

Installation & operational considerations

Maximum tc temperature

- Reliable operation and lifetime is only guaranteed if the maximum tc point temperature is not exceeded under the conditions of use.

Installation site

- Ensure that the LED driver does not exceed temperature higher than specified on the product datasheets.
- The general preferred installation position of LED drivers is to have the top cover facing upwards.

Quantity of drivers per miniature circuit breaker 16 A Type C

Based on I_{cont} (pcs.)	Based on I_{peak} (pcs.)	Typ.inrush current I_{peak} (A)	1/2 value time Δt (μs)	Calculated energy $I_{peak}^2 \Delta t$ ($A^2 s$)
22	24	41	236	0.301