



Date: \_\_\_\_\_ Type: \_\_\_\_\_

Firm Name: \_\_\_\_\_

Project: \_\_\_\_\_


# eW Reach Powercore gen2

## 63° spread lens, CQC

Premium long-throw exterior LED floodlight with solid white light

eW Reach Powercore gen2 combines all the benefits of LED-based lighting and control in an elegant fixture specifically designed for large-scale installations, such as skyscrapers, casinos, bridges, piers, public monuments, and themed attractions. With significantly more lumen output than any other competitive fixture and unprecedented light projection, this powerful fixture represents the next generation in exterior illumination. Fixtures are available in a warm 2700 K or a cool 4000 K. Custom configurations with custom channels of white or color LED sources are also available to support special applications.

- Integrates Powercore technology — Powercore technology rapidly, efficiently, and accurately controls power output to fixtures directly from line voltage.
- Unparalleled light output — Fixtures produce thousands of lumens and throw light hundreds of feet. eW Reach Powercore gen2 offers legitimate LED-based white light illumination of large-scale structures and objects.
- Versatile optics — Exchangeable spread lenses of 8°, 13°, 23°, 40°, 63°, and an asymmetric 5° x 17° support a variety of photometric distributions for a multitude of applications, including spotlighting, wall grazing, and asymmetric wall washing. Bezel and gasket are included with spread lenses for easy user installation.
- Unique split design — Spread lenses fit over each half of the fixture to support diffuser combinations. For instance, you could use one spread lens on the fixture's lower half to bathe a large façade with light at street level, and a different spread lens to project light hundreds of feet up the building's walls.

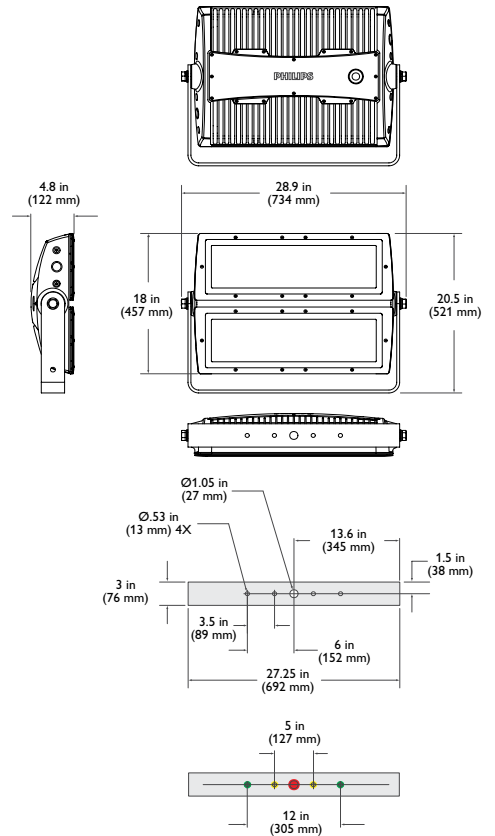

- Simple fixture positioning — Rugged, slim-profile mounting bracket allows simple positioning and fixture rotation through a full 360°. Side locking bolts reliably secure fixture with a standard wrench.
- Universal power input range — eW Reach Powercore gen2 accepts a universal power input range of 100 – 240 VAC, allowing consistent installation in any location around the world.

For detailed product information, please refer to the eW Reach Powercore gen2 Product Guide at [www.philipscolorkinetics.com/ls/essentialwhite/ewreach/](http://www.philipscolorkinetics.com/ls/essentialwhite/ewreach/)




# Photometrics / eW Reach Powercore 63° spread lens

Photometric data is based on test results from an independent NIST traceable testing lab. IES data is available at [www.philipscolorkinetics.com/support/ies](http://www.philipscolorkinetics.com/support/ies).


## 2700 K

Lumens	5,179
Efficacy	42.3 lm / W




## 4000 K

Lumens	6,054
Efficacy	48.3 lm / W




### Polar Candela Distribution




	0° H	15° H	30° H	45° H	60° H	75° H	90° H
0	0.0	22.5	45.0	67.5	90.0		
5	4386	4386	4386	4386	4386		
15	4294	4290	4296	4290	4273		
25	3634	3635	3652	3659	3649		
35	2637	2642	2663	2675	2668		
45	1534	1545	1574	1598	1600		
55	671	681	706	732	741		
65	223	227	237	250	256		
75	71	73	78	83	84		
85	22	23	24	29	29		
90	0	0	1	3	4		
90	0	0	0	0	0		

### Polar Candela Distribution




	0° H	15° H	30° H	45° H	60° H	75° H	90° H
0	0.0	22.5	45.0	67.5	90.0		
5	5387	5387	5387	5387	5387		
15	5268	5269	5277	5258	5240		
25	4457	4468	4495	4497	4490		
35	3244	3257	3293	3308	3309		
45	1894	1911	1956	1985	1990		
55	830	842	877	907	919		
65	275	279	294	309	317		
75	85	89	100	102	105		
85	25	27	30	35	36		
90	0	0	1	3	5		
90	0	0	0	0	0		

### Illuminance at Distance

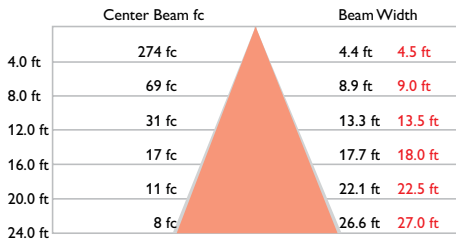

Vert. Spread: 57.9°  
Horiz. Spread: 58.8°

### Illuminance at Distance

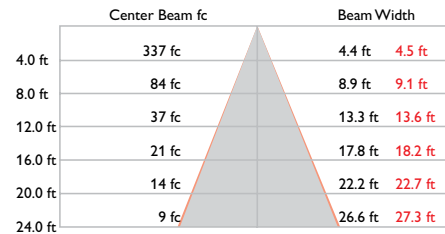

Vert. Spread: 58.1°  
Horiz. Spread: 59.2°

### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80		70		50		30		10		0							
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
0	119	119	119	119	116	116	116	100	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	93	104	102	100	100	98	97	97	95	94	92
2	107	102	97	93	105	100	96	86	97	93	90	93	91	88	91	89	87	85
3	101	94	89	84	99	93	88	79	90	86	82	87	84	81	85	82	80	78
4	95	87	81	77	94	86	81	73	84	79	75	82	78	75	80	77	74	72
5	90	81	75	70	89	80	75	68	79	73	70	77	72	69	75	71	68	67
6	85	76	70	65	84	75	69	63	74	68	64	72	68	64	71	67	64	62
7	81	71	65	60	80	71	65	59	69	64	60	68	63	60	67	63	59	58
8	77	67	61	56	76	66	60	55	65	60	56	64	59	56	63	59	55	54
9	73	63	57	53	72	63	57	52	62	56	52	61	56	52	60	55	52	51
10	70	60	54	50	69	59	53	49	58	53	49	58	53	49	57	52	49	48

### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80		70		50		30		10		0							
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
0	119	119	119	119	116	116	116	100	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	93	104	102	100	100	98	97	97	95	94	92
2	107	102	97	93	105	100	96	86	97	93	90	93	91	88	91	89	87	85
3	101	94	89	84	99	93	88	79	90	86	82	87	84	81	85	82	80	78
4	95	87	81	77	94	86	81	73	84	79	75	82	78	75	80	77	74	72
5	90	81	75	71	89	80	75	68	79	73	70	77	72	69	75	71	68	67
6	85	76	70	65	84	75	69	63	74	68	64	72	68	64	71	67	64	62
7	81	71	65	60	80	71	65	59	69	64	60	68	63	60	67	63	59	58
8	77	67	61	56	76	66	60	55	65	60	56	64	59	56	63	59	56	54
9	73	63	57	53	72	63	57	52	62	56	53	61	56	52	60	55	52	51
10	70	60	54	50	69	59	53	49	58	53	49	58	53	49	57	52	49	48

### Zonal Lumen

Zone	Lumens	% Fixture
0 - 60	5042.5	97.4 %
60 - 90	136.6	2.6 %
0 - 90	5179.1	100.0 %

For lux multiply fc by 10.7

### Zonal Lumen

Zone	Lumens	% Fixture
0 - 60	5893.4	97.3 %
60 - 90	160.9	2.7 %
0 - 90	6054.3	100.0 %

For lux multiply fc by 10.7

## Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	2700 K* (Half Unit)	4000 K* (Half Unit)
Output	Lumens†	5,179	6,054
	Efficacy (lm / W)	42.3	48.3
	CRI	80	82
Electrical	Input Voltage	100 – 240 VAC, auto-switching, 50 / 60 Hz	
	Power Consumption	250 W maximum at full output, steady state	
	Power Factor	.989 @ 120 VAC	
Control		On / Off; digital dimming by 4 connector cable & DE Pro	
Physical	Dimensions (Height x Width x Depth)	20.5 x 28.9 x 4.8 in (521 x 734 x 122 mm)	
	Weight	75 lb (34 kg)	
	Effective Projected Area (EPA)	0.42 m <sup>2</sup>	
	Housing	Die-cast aluminium, powder-coated finish	
	Lens	Tempered glass	
	Fixture Connections	6 ft (1.8 m) Leader Cable	
	Temperature Ranges	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage	
	Fixture Run Lengths	To calculate fixture run lengths and total power consumption for your specific installation, download the Configuration Calculator from <a href="http://www.philipscolorkinetics.com/support/install_tool/">www.philipscolorkinetics.com/support/install_tool/</a>	
Humidity	0 – 95%, non-condensing		
Certification and Safety	Certification	CQC, FCC Class A, CE, PSE	
	Environment	Dry / Damp / Wet Location, IP66	

\* Correlated color temperature (CCT) complies with ANSI C78.377-2008 for the chromaticity of solid state lighting products.

† Lumen measurement complies with IES LM-79-08 testing procedures.



## Lumen Maintenance

Threshold*	Ambient Temperature	Reported†	Calculated†
L90	@ 25°C	42,300 hrs	84,100 hrs
	@ 50°C	42,300 hrs	48,300 hrs
L80	@ 25°C	42,300 hrs	>100,000 hrs
	@ 50°C	42,300 hrs	>100,000 hrs
L70	@ 25°C	42,300 hrs	>100,000 hrs
	@ 50°C	42,300 hrs	>100,000 hrs

\* L<sub>xx</sub> = xx% lumen maintenance (when light output drops below xx% of initial output). All values are given at B50, or the median value where 50% of the LED population is better than the reported or calculated lumen maintenance measurement.

† Lumen maintenance figures are based on lifetime prediction graphs supplied by LED source manufacturers. Whenever possible, figures use measurements that comply with IES LM-80-08 testing procedures.

In accordance with TM-21-11, Reported values represent the interpolated value based on six times the LM-80-08 total test duration (in hours). Calculated values represent time durations that exceed six times the total test duration.

## Fixtures and Accessories

Item	Type	Item Number	Philips 12NC
eW Reach Powercore gen2 <i>Includes 6 ft (1.8 m) leader cable</i>	2700 K	523-000044-51	912400130275
	4000 K	523-000044-53	912400130276
3 Conductor Replacement Leader Cable: 6 ft (1.8 m)	CE	108-000046-01	910503700622
4 Conductor Replacement Leader Cable (required to digitally dim unit, w/ DE Pro): 6 ft (1.8 m)	CE	108-000043-03	910503700454
Data Enabler Pro (required to digitally dim unit)	PG21 / PG13 (metric size conduit)	106-000004-01	910503701211
Spread Lens with bezel	8°	120-000068-05	910503700511
	13°	120-000068-00	910503700506
	23°	120-000068-01	910503700507
	40°	120-000068-02	910503700508
	63°	120-000068-03	910503700509
	Asymmetric (5° x 17°)	120-000068-04	910503700510

Use Item Number when ordering in North America.



Philips Color Kinetics  
 3 Burlington Woods Drive  
 Burlington, Massachusetts 01803 USA  
 Tel 888.385.5742  
 Tel 617.423.9999  
 Fax 617.423.9998  
[www.philipscolorkinetics.com](http://www.philipscolorkinetics.com)  
 @ColorKinetics

Copyright © 2009 – 2014 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DIMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice.

DAS-000031-07 R06 08-14