



Date: _____ Type: _____

Firm Name: _____

Project: _____


iW Reach Powercore gen2

5° native (no spread lens), UL / CE

Premium long-throw exterior LED floodlight with intelligent white light

iW Reach Powercore gen2, the intelligent white light version of our flagship, high-performance exterior architectural floodlight, outputs washes of white light in color temperatures ranging from a warm 2700 K to a cool 6500 K. iW Reach Powercore gen2 combines all the benefits of LED-based lighting in an elegant fixture specifically designed for skyscrapers, casinos, large retail exteriors, bridges, piers, public monuments, and themed attractions. With significantly more lumen output than any other competitive fixture and unprecedented light projection, this powerful fixture represents the next generation in exterior illumination.

- Unique split design — Spread lenses fit over each fixture half to support diffuser combinations. Use one spread lens on the lower half to bathe a large façade with light at street level, and a different lens to project light hundreds of feet up the building's walls.
- Integrates Powercore technology — Powercore technology rapidly, efficiently, and accurately controls power output to fixtures directly from line voltage. The Philips Color Kinetics Data Enabler Pro merges line voltage with control data and delivers them over a single standard wire, dramatically simplifying installation and lowering total system cost.
- High-performance illumination in a wide range of color temperatures — Channels of warm, neutral, and cool white LEDs produce temperatures ranging from 2700 K to 6500 K, offering the greatest possible light intensity at all temperatures. Fixture brightness can be varied while maintaining constant temperature.
- Versatile optics — Exchangeable spread lenses of 8°, 13°, 23°, 40°, 63°, and an asymmetric 5° x 17° support a multitude of applications, including spotlighting, wall grazing, and asymmetric wall washing.
- Simple fixture positioning — Rugged, slim-profile mounting bracket allows simple

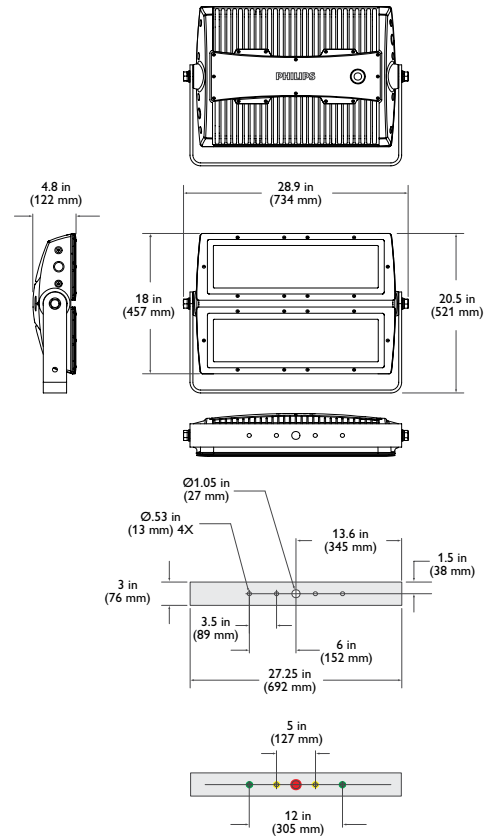

positioning and fixture rotation through a full 360°. Side locking bolts reliably secure fixture with standard wrench.

- Universal power input range — Accepts a universal power input range of 100 – 277 VAC, allowing long fixture runs and consistent installation in any location around the world. Each Data Enabler Pro can support multiple fixtures for illuminating even the largest exterior façades and structures.

For detailed product information, please refer to the iW Reach Powercore gen2 Product Guide at www.philipscolorkinetics.com/ls/intelliwhite/iwreach/



Photometrics


Photometric data is based on test results from an independent NIST traceable testing lab. IES data is available at www.philipscolorkinetics.com/support/ies.

5° native (no spread lens), full unit

Lumens	13,483
Efficacy	57.0 lm / W



Polar Candela Distribution



	0	25	45	70	90
0	908630	908630	908630	908630	908630
5	154550	121860	104190	86042	79422
15	1664	1574	1550	1521	1553
25	487	480	495	492	552
35	263	249	261	243	327
45	164	154	154	155	159
55	127	166	119	128	121
65	115	104	101	105	98
75	92	79	78	76	73
85	70	69	69	69	68
90	68	68	68	68	68

Illuminance at Distance

	Center Beam fc	Beam Width
4 ft	56,789 fc	0.4 ft 0.4 ft
8 ft	14,197 fc	0.9 ft 0.8 ft
12 ft	6,310 fc	1.3 ft 1.3 ft
16 ft	3,549 fc	1.7 ft 1.7 ft
20 ft	2,272 fc	2.1 ft 2.1 ft
24 ft	1,577 fc	2.6 ft 2.5 ft

955 ft (291.1 m) 1 fc maximum distance
 ■ Vert. Spread: 6.1°
 ■ Horiz. Spread: 6.0°

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80		70		50		30		10		0	
RW %:	70	50	30	0	70	50	30	0	50	30	20	0
RCR: 0	119	119	119	119	116	116	116	100	111	111	111	100
1	116	114	112	111	114	112	111	99	108	107	106	101
2	113	110	108	106	111	109	107	98	106	104	103	101
3	111	108	105	103	109	106	104	97	104	102	100	99
4	109	105	102	100	108	104	102	96	102	100	99	99
5	108	103	101	98	106	103	100	95	101	99	97	96
6	106	102	99	97	105	101	99	95	100	98	96	95
7	105	101	98	96	104	100	98	95	99	97	96	94
8	104	100	97	95	103	99	97	94	99	96	95	94
9	103	99	96	95	102	99	96	94	98	96	94	93
10	102	98	96	94	102	98	96	93	97	95	94	93

Zonal Lumen


Zone	Lumens	% Fixture
0 - 60	13,219.2	98.0 %
60 - 90	263.4	2.0 %
0 - 90	13,482.6	100.0 %

5° native (no spread lens), half unit

Lumens	Efficacy
6710	56.7 lm / W



Polar Candela Distribution



	0	25	45	70	90
0	468056	468056	468056	468056	468056
5	80134	80205	77031	66962	62241
15	802	793	805	811	840
25	237	235	251	257	284
35	131	126	132	125	174
45	81	76	77	78	80
55	62	79	59	64	61
65	56	50	49	52	48
75	45	38	38	38	36
85	34	33	33	33	34
90	33	33	33	33	33

Illuminance at Distance

	Center Beam fc	Beam Width
4 ft	29,254 fc	0.4 ft 0.4 ft
8 ft	7,313. fc	0.9 ft 0.8 ft
12 ft	3,250 fc	1.3 ft 1.2 ft
16 ft	1,828 fc	1.7 ft 1.6 ft
20 ft	1,170 fc	2.2 ft 2.0 ft
24 ft	813 fc	2.6 ft 2.4 ft

685 ft (208.8 m) 1 fc maximum distance
 ■ Vert. Spread: 6.2°
 ■ Horiz. Spread: 5.7°

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80		70		50		30		10		0	
RW %:	70	50	30	0	70	50	30	0	50	30	20	0
RCR: 0	119	119	119	119	116	116	116	100	111	111	111	100
1	116	114	112	110	113	111	110	98	108	106	105	101
2	113	109	107	105	111	108	105	96	105	103	101	99
3	110	106	103	101	108	105	102	95	102	100	98	98
4	108	103	100	98	106	102	99	93	100	98	96	95
5	106	101	98	95	104	100	97	92	99	96	94	93
6	104	99	96	93	103	98	95	91	97	95	93	91
7	102	97	94	92	101	97	94	90	96	93	91	90
8	101	96	93	91	100	95	93	89	95	92	90	89
9	99	95	92	90	99	94	91	88	94	91	89	88
10	98	93	91	89	98	93	90	88	93	90	88	87

Zonal Lumen

Zone	Lumens	% Fixture
0 - 60	6580.4	98.1 %
60 - 90	130.0	1.9 %
0 - 90	6710.4	100.0 %

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Details
	Color Temperature*	2700 K – 6500 K
	Lumens†	13,483 (full unit)
	Efficacy (lm / W)	57.0 (full unit)
	CRI	79 (full unit)
Electrical	Input Voltage	100 – 277 VAC, auto-switching, 50 / 60 Hz
	Power Consumption	250 W maximum at full output, steady state
	Power Factor	.99 (no spread lens, full unit, all channels full on) @ 120 VAC
Control	Interface	Data Enabler Pro (DMX / Ethernet)
	Control System	Philips Color Kinetics full range of controllers, including Light System Manager, iPlayer 3, and ColorDial Pro, or third-party controllers
Physical	Dimensions (Height x Width x Depth)	20.5 x 28.9 x 4.8 in (521 x 734 x 122 mm)
	Weight	75 lb (34 kg)
	Effective Projected Area (EPA)	0.42 m ²
	Housing	Die-cast aluminium, powder-coated finish
	Lens	Tempered glass
	Fixture Connections	Integral male / female waterproof connector, 6 ft (1.8 m) unified power / data cable
	Temperature Ranges	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage
	Humidity	0 – 95%, non-condensing
Certification and Safety	Certification	UL / cUL, FCC Class A, CE, PSE
	Environment	Dry / Damp / Wet Location, IP66

* Color temperatures conform to nominal CCTs as defined in ANSI Chromaticity Standard C78.

† Lumen measurement complies with IES LM-79-08 testing procedures.



CHROMACORE[®] | OPTIBIN[®] | POWERCORE[®]
CK TECHNOLOGY | CK TECHNOLOGY | CK TECHNOLOGY

Lumen Maintenance

Threshold*	Ambient Temperature	Reported†	Calculated†
L90	@ 25°C	42,000 hrs	84,000 hrs
	@ 50°C	42,000 hrs	48,000 hrs
L80	@ 25°C	42,000 hrs	>100,000 hrs
	@ 50°C	42,000 hrs	>100,000 hrs
L70	@ 25°C	42,000 hrs	>100,000 hrs
	@ 50°C	42,000 hrs	>100,000 hrs

* L_{xx} = xx% lumen maintenance (when light output drops below xx% of initial output). All values are given at B50, or the median value where 50% of the LED population is better than the reported or calculated lumen maintenance measurement.

† Lumen maintenance figures are based on lifetime prediction graphs supplied by LED source manufacturers. Whenever possible, figures use measurements that comply with IES LM-80-08 testing procedures.

In accordance with TM-21-11, Reported values represent the interpolated value based on six times the LM-80-80 total test duration (in hours). Calculated values represent time durations that exceed six times the total test duration.

Fixtures and Accessories

Item	Type	Item Number	Philips 12NC	
iW Reach Powercore gen2 <i>Includes 3.0 m (10 ft) leader cable</i>	UL / cUL	523-000094-00	912400130187	
	CE / PSE	523-000094-01	912400130222	
Replacement Leader Cable	UL	3.0 m (10 ft)	108-000055-03	910503704066
		15.2 m (50 ft)	108-000055-00	910503703137
	CE	3.0 m (10 ft)	108-000055-04	910503704067
		15.2 m (50 ft)	108-000055-01	910503704064
Spread Lens with bezel	13°	120-000068-00	910503700506	
	23°	120-000068-01	910503700507	
	40°	120-000068-02	910503700508	
	63°	120-000068-03	910503700509	
	Asymmetric (5° x 17°)	120-000068-04	910503700510	
	8°	120-000068-05	910503700511	
Data Enabler Pro	3/4 in / 1/2 in NPT (U.S. trade size conduit)	106-000004-00	910503701210	
	PG21 / PG13 (metric size conduit)	106-000004-01	910503701211	

Use Item Number when ordering in North America.



Philips Color Kinetics
 3 Burlington Woods Drive
 Burlington, Massachusetts 01803 USA
 Tel 888.385.5742
 Tel 617.423.9999
 Fax 617.423.9998
www.philipscolorkinetics.com

Copyright © 2009 – 2014 Philips Solid-State Lighting Solutions, Inc. All rights reserved.
 Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DiMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice. DAS-000030-01 R06 8-14