

Neoled™ Side

Architectural Flexible Linear LED Neon



IP68
Protection



160 Beam
Angle



IK08
Protection



300mm
Bend



3
year
Warranty



Solvent
Resistant



Flame
Resistant



UV
Resistant



Saltwater
Resistant

Optics

Flat Top 160° Beam Angle (160° Viewing)

Control Options (with suitable Driver)

DALI, DSI, 1-10vdc, DMX and Switched

LED Colour Options

White - 2700K, 3000K, 4000k, 5700K

Colour - Red, Green, Blue and Amber

IP Rating

IP68

LED Wattage/Voltage




White/Green/Blue - 12.0 watts p/mtr 24VDC

Red/Amber - 7.2 watts p/mtr 24VDC

Lumen Output


W27 - 2700k - 420 Lm/Metre	R - Red - 130 Lm/Metre
W35 - 3000k - 420 Lm/Metre	G - Green - 300 Lm/Metre
W45 - 4000k - 480 Lm/Metre	B - Blue - 50 Lm/Metre
W57 - 5700k - 480 Lm/Metre	A - Amber - 130 Lm/Metre

Candle power distribution

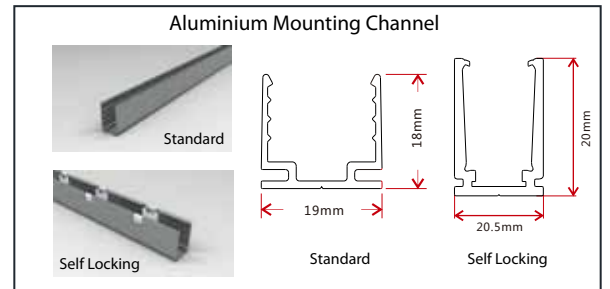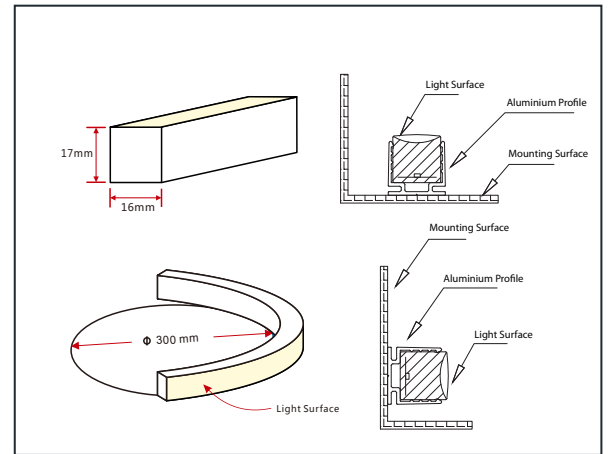

Injection-moulded Connector

Note: Unless otherwise stated, the tolerance of the connector is ±0.5mm.

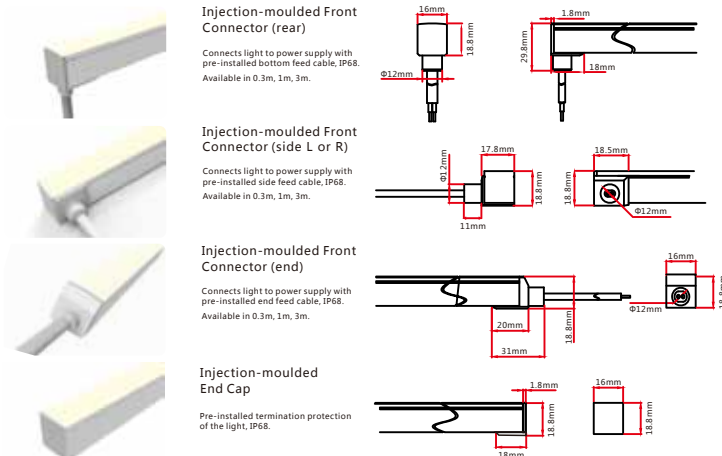

PRODUCT CODE BUILDER

NLS **W27** - **5M**

LED Colour

Roll Size

2700K - W27	Red - R	5 Metre - 5M
3000K - W30	Green - G	10 Metre - 10M
4000K - W40	Blue - B	
5700K - W57	Amber - A	