

Neoled™ Top

Architectural Flexible Linear LED Neon



IP68
Protection



160 Beam
Angle



IK08
Protection



120mm
Bend



Warranty



Solvent
Resistant



Flame
Resistant



UV
Resistant



Saltwater
Resistant

Optics

Flat Top 160° Beam Angle (160° Viewing)

Control Options (with suitable Driver)

DALI, DSI, 1-10vdc, DMX and Switched

LED Colour Options

White - 2700K, 3000K, 4000k, 5700K

Colour - Red, Green, Blue and Amber

IP Rating

IP68

LED Wattage/Voltage

White/Green/Blue - 12.0 watts p/mtr 24VDC

Red/Amber - 7.2 watts p/mtr 24VDC

Lumen Output

W27 - 2700k - 280 Lm/Metre

W35 - 3000k - 280 Lm/Metre

W45 - 4000k - 320 Lm/Metre

W57 - 5700k - 320 Lm/Metre




R - Red - 100 Lm/Metre

G - Green - 220 Lm/Metre

B - Blue - 35 Lm/Metre

A - Amber - 100 Lm/Metre

Candle power distribution

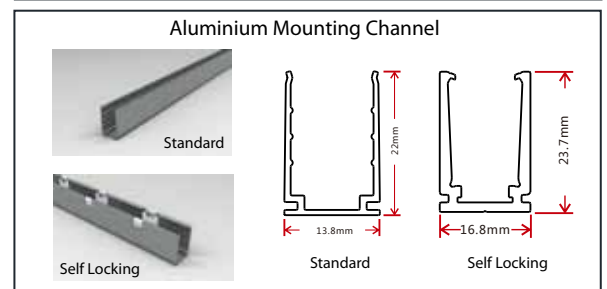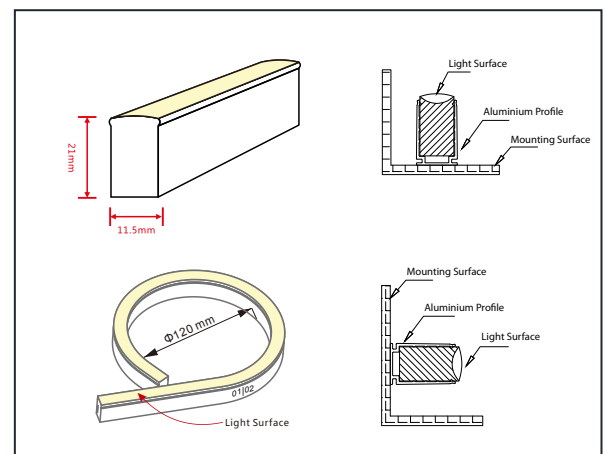

Injection-moulded Connector

Note: Unless otherwise stated, the tolerance of the connector is $\pm 0.5\text{mm}$.



Injection-moulded Front
Connector (rear)

Connects light to power supply with
pre-installed bottom feed cable, IP68.
Cable length available in 0.3m, 1m, 3m.



Injection-moulded Front
Connector (side - L or R)

Connects light to power supply with
pre-installed side feed cable, IP68.
Cable length available in 0.3m, 1m, 3m.




Injection-moulded Front
Connector (end)

Connects light to power supply with
pre-installed end feed cable, IP68.
Cable length available in 0.3m, 1m, 3m.



Injection-moulded End Cap

Pre-installed termination protection
of the light, IP68.

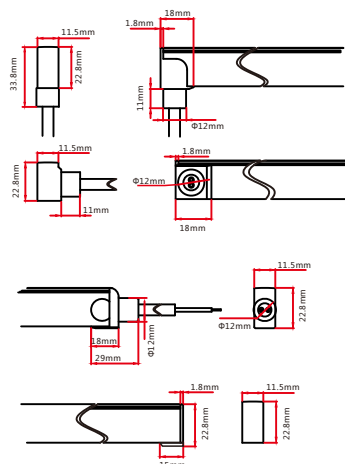

PRODUCT CODE BUILDER

NLT W27 - 5M

LED Colour

Roll Size

2700K - W27

3000K - W30

4000K - W40

5700K - W57

Red - R

Green - G

Blue - B

Amber - A

5 Metre - 5M

10 Metre - 10M

xulux Pty Ltd
14/388 Newman Road Geebung Qld 4034
P 07 3172 7131 F 07 3161 5598
E sales@xulux.com.au
W www.xulux.com.au

Specifications are subject
to change without notice
NEOLEDNLT RX5

XULUX
LED LIGHTING SOLUTIONS