

# ICON 800 FAMILY

Adjustable 16W, 12W, 8W LED Downlights  
1190, 955, 655 Lumens



For more information please contact

**lightmoves** (03) 9701 2500  
info@lightmoves.com.au

138-146 Browns Rd, Noble Park VIC 3174

Designed and Manufactured in Australia

**Digilin**  
AUSTRALIA

# ICON 800 FAMILY



Adjustable 16W, 12W, 8W LED Downlights

1190, 955, 655 Lumens


## THE ORIGINAL AND STILL THE BEST

Highest output of its size available, still Australian made with a range of wattage options, surface mount and glare reduction accessories


Excellent for smooth wall washing and general light in commercial or residential especially, medium to higher ceiling heights

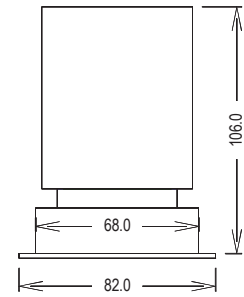

LIGHT DISTRIBUTION CURVE (CD) 22°

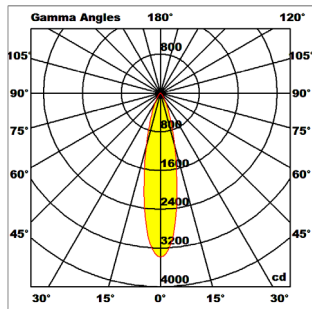


LUX DIAGRAM (LX) 22°

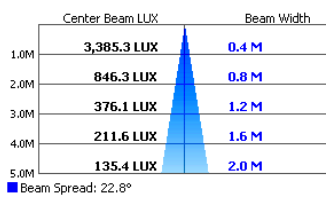


## SPECIFICATIONS

Model	816	812	808
Colours	3000K, 3500K, 4000K, 5000K		
Typical LED Lumen @TJ = 25°C	1190, 1190, 1190, 1300	955, 955, 955, 1040	655, 655, 655, 720
Luminaire Lumens @60° Beam Option	900, 900, 900, 980	790, 790, 790, 860	505, 505, 505, 555
Typical CRI	85		
Beam Option	22°, 36°, 60°		
Performance	70% lumen maintenance @ 50,000 Hrs (L70)		
Luminaire Power	16W (700mA @ 23.1V Nominal)	11W (500mA @ 22V Nominal)	7.4W (350mA @ 21V Nominal)
Connected Load	18.2W	13.5W	9.9W
IP Rating	IP 40		
Material and Finish	Heat Sink: Extruded Aluminum Bezel & Body: Cast Aluminum* *Custom color on request		
Power Supply	LPC 28700-MD	LPC 28500-MD	LPC 52350-MD
Mains Dimming	LPC LCAI 30700	LPC LCAI 501050	LPC LCAI 30350
Power Factor	≥ 0.9		
Approval			
Weight	400g		


LIGHT DISTRIBUTION CURVE (CD) 22°

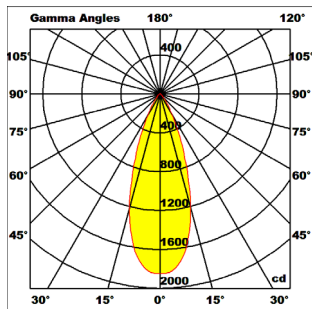


LUX DIAGRAM (LX) 22°

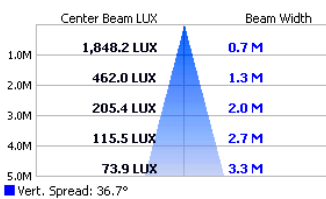


LIGHT DISTRIBUTION CURVE (CD) 22°

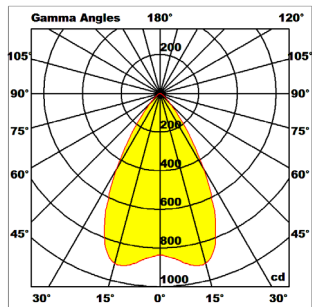

LUX DIAGRAM (LX) 22°

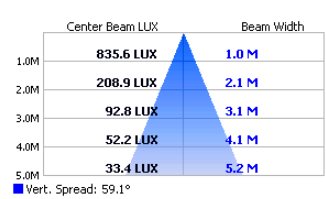

## ORDERING CODES

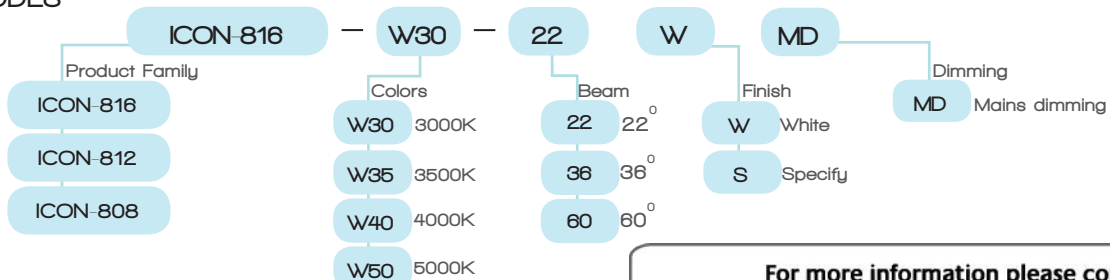

For more information please contact

**lightmoves** (03) 9701 2500  
info@lightmoves.com.au

138-146 Browns Rd, Noble Park VIC 3174