

ICON 816

Adjustable 16w Downlight
1300 Lumens



Australian Lighting
Manufacturers
Since 1980

Digilin
AUSTRALIA

ICON 816


Adjustable 16w Downlight

1300 Lumens

The original and still the best

Highest output of its type available, still Australian made with a range of attachments.

Excellent for general lighting purposes in commercial or residential projects. Adjustable head provides 28 degree tilt allowing smooth wall washing.

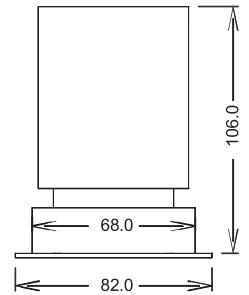


SPECIFICATIONS


Colours	Warm White	Neutral White	Neutral White	Cool White
Colour Temperature	3000K	3500K	4000K	5000K
LED Lumens @ Tj 25 °C	1190	1190	1190	1300
Luminaire Lumens @ 60° Beam	900	900	900	980
Typical CRI	85			
MacAdams Ellipse	3 SDCM/MacAdam Steps			
Beam Option	22°, 36° & 60°			
Performance	70% Lumen Maintenance @ 50,000 Hrs (L70)			
Luminaire Power	16w (700mA @ 23.1V Nominal)			
Connected Load	18.2w			
IP Rating	IP40			
Material & Finish	Heat Sink - Extruded Aluminium Bezel & Body - Cast Aluminium* Custom Colour On Request			
Power Supply	Mains Dimming: LPC-26700-MD DALI Dimming: LPC-LCAI-30700			
Power Factor	≥0.9			
Weight	400g			
Approvals				
Hole Cut Out	70mm Dia			

LIGHT DISTRIBUTION


LIGHT DISTRIBUTION CURVE (CD) 22°

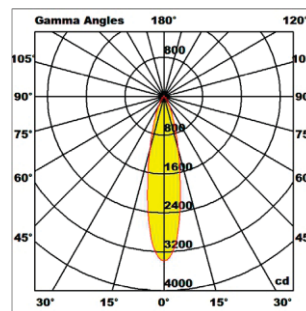


LUX DIAGRAM (LX) 22°

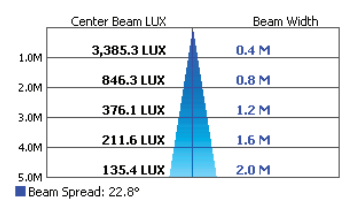


LIGHT DISTRIBUTION CURVE (CD) 36°

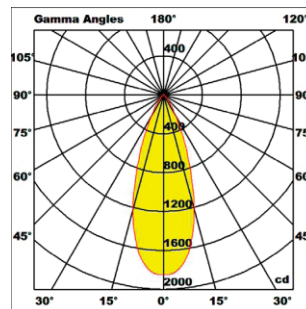


LUX DIAGRAM (LX) 36°

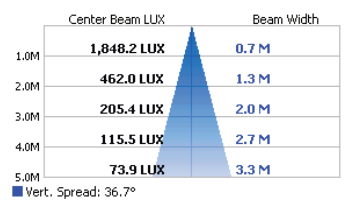


LIGHT DISTRIBUTION CURVE (CD) 60°

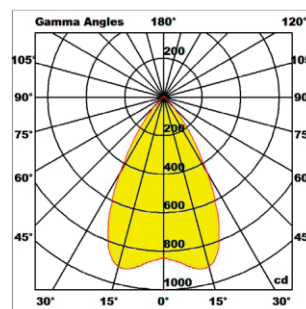

LUX DIAGRAM (LX) 60°

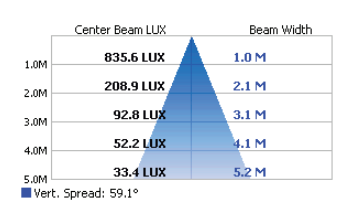

ORDERING CODES

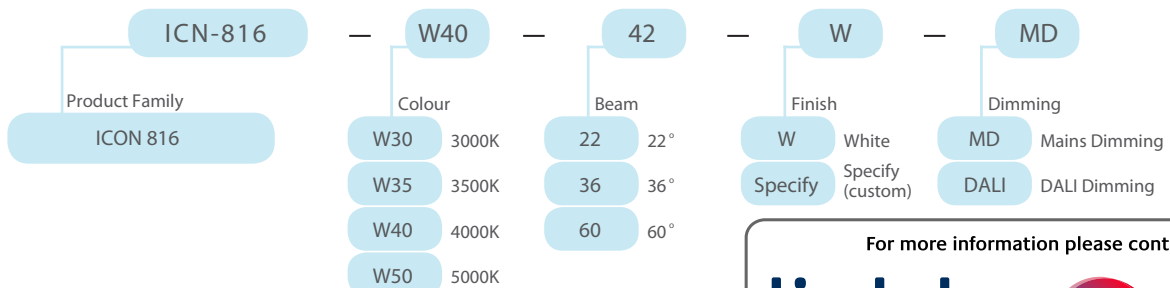

For more information please contact

(03) 9701 2500 info@lightmoves.com.au

138-146 Browns Rd, Noble Park VIC 3174