

KIT LED PRO

Indoor LED ceiling luminaires



Areas of application

- Constant economical lighting in retail outlets, reception areas, offices and corridors

Product benefits

- Simple installation and maintenance thanks to Twist & Lock interlock for lamp
- Economic
- Quick and simple installation
- Ready for installation

Product features


- Die-cast aluminum casing in two versions: square and round
- Luminaire color in two versions: brushed nickel look and white (RAL 9016)
- Lamp swivels through 40°
- Operating temperature: -15...40 °C
- Mounting diameter: 80 mm
- Direct connection to a 220...240 V AC supply
- Color temperature: 3,000 K




For more information please contact

lightmoves (03) 9701 2500
info@lightmoves.com.au
138-146 Browns Rd, Noble Park VIC 3174

Product family datasheet



Product line drawing

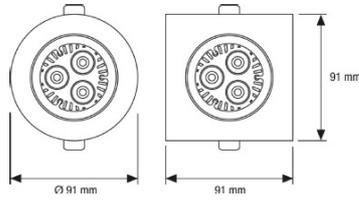

Product line drawing - technical

Product family datasheet

Technical data

Product description	Type of installation	Nominal wattage	Color temperature	Beam angle	Nominal voltage	Mains frequency
KIT LED PRO R 1X4.5 W BR NI	Recessed	3 W	2700 K	36 °	220...240 V	50...60 Hz
KIT LED PRO CARRÉ 1X4.5 W BR NI	Recessed	3 W	2700 K	36 °	220...240 V	50...60 Hz

Product description	Luminous intensity	Light color as per EN 12464-1	Diameter	Height	Mounting diameter	Mounting depth
KIT LED PRO R 1X4.5 W BR NI	375 cd	Warm white	91.0 mm	90.0 mm	80.0 mm	≥ 150.0 mm
KIT LED PRO CARRÉ 1X4.5 W BR NI	375 cd	Warm white		90.0 mm	80.0 mm	≥ 150.0 mm

Product description	Body material	Product color	Glow Wire Test according to IEC 695-2-1	Equipped with lamp	Adjustable	Dimmable
KIT LED PRO R 1X4.5 W BR NI	Die-cast aluminum	Nickel	960 °C	Yes	Yes	No
KIT LED PRO CARRÉ 1X4.5 W BR NI	Die-cast aluminum	Nickel	960 °C	Yes	Yes	No

Product description	Type of connection	Protection class	Type of protection	Protection against ignition and fire	Protection class IK (shock resistance)	Number of lighting outlets
KIT LED PRO R 1X4.5 W BR NI	Terminal, 2-pole	II	IP23	F	IK02	

Product family datasheet

Product description	Type of connection	Protection class	Type of protection	Protection against ignition and fire	Protection class IK (shock resistance)	Number of lighting outlets
KIT LED PRO CARRÉ 1X4.5 W BR NI	Terminal, 2-pole	II	IP23	F	IK02	1

Product description	Length	Width
KIT LED PRO R 1X4.5 W BR NI		
KIT LED PRO CARRÉ 1X4.5 W BR NI	91.0 mm	91.0 mm

Product family datasheet

Equipment / Accessories

- Equipped with PARATHOM PAR 16 LED

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

For more information please contact

lightmoves (03) 9701 2500
info@lightmoves.com.au

138-146 Browns Rd, Noble Park VIC 3174