



Date: \_\_\_\_\_ Type: \_\_\_\_\_

Firm Name: \_\_\_\_\_

Project: \_\_\_\_\_

# iColor Flex LMX gen2

Flexible strands of large high-intensity LED nodes with intelligent color light

iColor Flex LMX are flexible strands of 50 large, individually addressable, full-color LED nodes designed for extraordinary effects and expansive installations. The flexible form factor accommodates two- and three-dimensional configurations, while high light output affords superior long-distance viewing for architectural perimeter lighting, large-scale signage, and building-covering video displays.

- Daylight visible — Each node produces full-color light output of up to 11 candela and 17,000 nits.
- Multiple lens options — Standard clear flat and translucent dome lenses. Optional marquee lenses snap onto flat-lens nodes

to create the appearance of bulbs on a traditional theatre marquee.

- Adaptable mounting — Strands can be mounted directly to a surface. Optional mounting tracks ensure straight linear runs. Snap-on spacers hide cabling and mounting hardware between nodes. Single node mounts provide anchor points for installations with uneven node spacing or complex geometries.
- Outdoor rated — Fully sealed and IP66-rated for outdoor applications.

For detailed product information, please refer to the iColor Flex LMX gen2 Product Guide at [www.philipscolorkinetics.com/ls/rgb/flexlmx/](http://www.philipscolorkinetics.com/ls/rgb/flexlmx/)

## Specifications Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Clear Flat Lens	Translucent Dome Lens
Output	Lumens Per Node*	30	13
	On-Axis Candela Per Node	11.0	2.2
	Luminance Per Node	17,004 cd / m <sup>2</sup>	3,450 cd / m <sup>2</sup>
	Viewing Angle	105°	165°
	Lumen Maintenance†	60,000 hours L70 @ 50° C 60,000 hours L70 @ 25° C 60,000 hours L50 @ 50° C 60,000 hours L50 @ 25° C	
Electrical	LED Channels	Red / Green / Blue	
	Input Voltage	24 VDC via sPDS-480ca, PDS-60ca, and sPDS-60ca	
Control	Power Consumption	1 W max. per node at full output, steady state	
	Interface	sPDS-60ca 24V (DMX / Ethernet) PDS-60ca 24V (Pre-programmed, DMX, or Ethernet) PDS-480ca 24V (Ethernet)	
Physical	Control System	Philips full range of controllers, including Video System Manager Pro, Light System Manager, and iPlayer 3, or third-party controllers	
	Node Dimensions (Height x Width x Depth)	1.2 x 1.25 x .67 in (31 x 32 x 17 mm)	1.2 x 1.25 x 1 in (31 x 32 x 25 mm)
	Weight	2.2 lb (1 kg) 50-node strand, 4 in on-center node spacing	
	Housing	White or black polycarbonate	
	Lens	Clear or translucent plastic	
	Fixture Connections	Integrated watertight 3-pin connector	
	Temperature Ranges	-40° – 122° F (-40° – 50° C) Operating ≥ 32° F (≥ 0° C) Handling -4° – 122° F (-20° – 50° C) Startup -22° – 185° F (-30° – 85° C) Storage	
	Humidity	0 – 95%, non-condensing	
Certification and Safety	Maximum Fixtures Per Power / Data Supply	sPDS-480ca 24V: 8 strands sPDS-60ca 24V: 1 strand PDS-60ca 24V : 1 strand	
	Certification	UL / cUL, FCC Class A, CE	
	Environment	Dry / Damp / Wet Location, IP66	

\* Lumen measurement complies with IES LM-79-08 testing procedures.

† L70 = 70% lumen maintenance (when light output drops below 70% of initial output). L50 = 50% lumen maintenance (when light output drops below 50% of initial output). Ambient luminaire temperatures specified. Lumen maintenance calculations are based on lifetime prediction graphs supplied by LED source manufacturers. Calculations for white-light LED fixtures are based on measurements that comply with IES LM-80-08 testing procedures. Refer to [www.philipscolorkinetics.com/support/appnotes/lm-80-08.pdf](http://www.philipscolorkinetics.com/support/appnotes/lm-80-08.pdf) for more information.



# PHILIPS

## Fixtures and Power / Data Supplies

Item	Type		Item Number	Philips 12NC
iColor Flex LMX gen2 4 in on-center node spacing	Clear Flat Lens	White	101-000077-02	912400130024
		Black	101-000077-00	910503705491
	Translucent Dome Lens	White	101-000077-06	912400130028
		Black	101-000077-04	912400130026
iColor Flex LMX gen2 12 in on-center node spacing	Clear Flat Lens	White	101-000077-03	912400130025
		Black	101-000077-01	912400130023
	Translucent Dome Lens	White	101-000077-07	912400130029
		Black	101-000077-05	912400130027

Leader Cable	25 ft (7.6 m)	Black	108-000045-00	910503700696
	50 ft (15.2 m)	Black	108-000045-01	910503700697
	100 ft (30.5 m)	Black	108-000045-02	910503700698

Mounting Track Qty 1	4 ft (1.2 m)	White	101-000057-00	910503700044
		Black	101-000057-01	910503700045

Spacers Qty 50	4 in (102 mm)	White	101-000059-00	910503700048
		Black	101-000061-00	910503700052
	12 in (305 mm)	White	101-000059-01	910503700049
		Black	101-000061-01	910503700053

Single-Node Mounts Qty 50		White	101-000058-00	910503700046
		Black	101-000058-01	910503700047

sPDS-480ca 24V	Ethernet	109-000026-00	910503700110
PDS-60ca 24V	Pre-programmed	109-000016-00	910503700095
	DMX	109-000016-01	910503700333
sPDS-60ca 24V	Ethernet	109-000016-02	910503700334
	DMX / Ethernet	109-000021-02	910503700106

Use Item Number when ordering in North America.

## Accessories

Item	Type		Item Number	Philips 12NC
Marquee Lens Kits Qty 50	Clear	White	999-007997-00	910503702308
		Black	999-007997-01	910503702309
	Semi-Frosted	White	999-007997-04	910503702312
		Black	999-007997-05	910503702313
	Translucent	White	999-007997-02	910503702310
		Black	999-007997-03	910503702311









Glare Shield Kits Qty 50		Black	120-000179-00	912400130036
-----------------------------	--	-------	---------------	--------------

Accessory Mounting Track Qty 1	4 ft (1.2 m)	White	101-000057-03	910503704266
		Black	101-000057-04	910503704267

Accessory Spacers Qty 50	4 in (102 mm)	White	101-000075-00	910503704272
		Black	101-000075-02	910503704274
	12 in (305 mm)	White	101-000075-01	910503704273
		Black	101-000075-03	910503704275

Use Item Number when ordering in North America.

## Dimensions

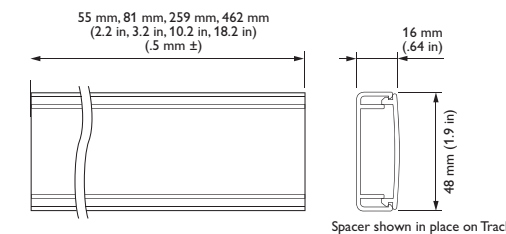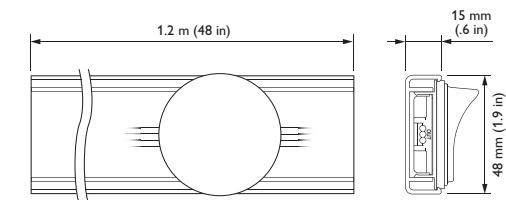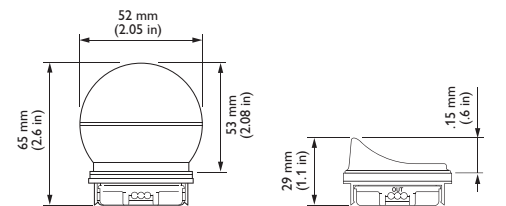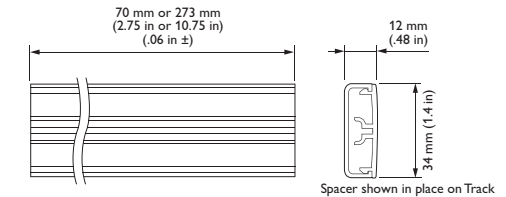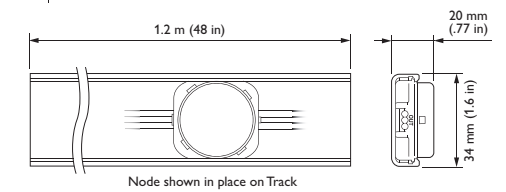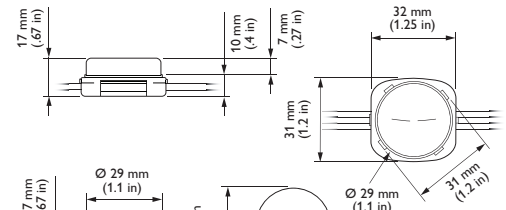

Philips Color Kinetics  
3 Burlington Woods Drive  
Burlington, Massachusetts 01803 USA  
Tel 888.385.5742  
Tel 617.423.9999  
Fax 617.423.9998  
www.philipscolorkinetics.com

Copyright © 2010 – 2013 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DIMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iV, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice. DAS-000050-01 R08 12-12