

NYX DOWNLIGHT

COMPACT LINEAR RECESSED DOWNLIGHT

10W

21W

DESCRIPTION

Body: Die-cast Aluminium (white standard)

Optic: Collimator

Driver: Remote

Weight: 0.25kg (10.5W), 0.47kg (21W)

FEATURES

- Available in two sizes
- 5-year Electrical System Warranty
- High Colour Consistency
- LEDiL Optics (Finland)
- 3000K standard (2700K on request)
- Beam angles 15°, 30°, 50°
- Dimmable (Phase Dim¹, DALI, DMX)
- CRI >90
- 700mA constant current supply
- Suitable for ceilings 5-25mm thick
- Cutout 128mm x 35mm (10.5W),
248mm x 35mm (21W)



*21W model shown



NARROW



MEDIUM




WIDE



IP
20

58mm

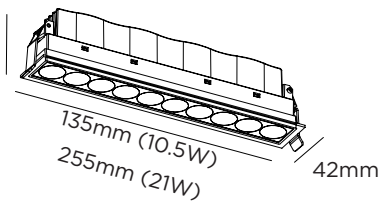

| ORDERING CODE ² | DESCRIPTION | POWER (W) | LUMEN OUTPUT |
|----------------------------|--------------------------------------|-----------|--------------|
| | | | CRI 90 |
| 240840-90-YY | NYX LINEAR DOWNLIGHT 10.5W 2700K 15° | 10.5 | TBC |
| 240841-90-YY | NYX LINEAR DOWNLIGHT 10.5W 2700K 30° | 10.5 | TBC |
| 240842-90-YY | NYX LINEAR DOWNLIGHT 10.5W 2700K 50° | 10.5 | TBC |
| 240843-90-YY | NYX LINEAR DOWNLIGHT 10.5W 3000K 15° | 10.5 | 560 |
| 240844-90-YY | NYX LINEAR DOWNLIGHT 10.5W 3000K 30° | 10.5 | 560 |
| 240845-90-YY | NYX LINEAR DOWNLIGHT 10.5W 3000K 50° | 10.5 | 560 |
| 240846-90-YY | NYX LINEAR DOWNLIGHT 21W 2700K 15° | 21 | TBC |
| 240847-90-YY | NYX LINEAR DOWNLIGHT 21W 2700K 30° | 21 | TBC |
| 240848-90-YY | NYX LINEAR DOWNLIGHT 21W 2700K 50° | 21 | TBC |
| 240849-90-YY | NYX LINEAR DOWNLIGHT 21W 3000K 15° | 21 | 1120 |
| 240850-90-YY | NYX LINEAR DOWNLIGHT 21W 3000K 30° | 21 | 1000 |
| 240851-90-YY | NYX LINEAR DOWNLIGHT 21W 3000K 50° | 21 | 1000 |

¹ Phase-dimming - please contact your local representative for further information.

² Ordering codes:

XX = CRI (refer to table)

YY = Control Options (ND = Non-Dim, PD = Phase Dim, DA = DALI)