

NYX FLOODLIGHT

COMPACT LINEAR RECESSED FLOODLIGHT

10W

21W

PRELIMINARY DATA

DESCRIPTION

Body: Die-cast Aluminium (white standard)

Optic: Collimator

Driver: Remote

Weight: 0.24kg (10.5W), 0.43kg (21W)

FEATURES


- Available in two sizes
- 5-year Electrical System Warranty
- High Colour Consistency
- LEDiL Optics (Finland)
- 2700K or 3000K standard
- Beam angles 15°, 36°, 50°
- Dimmable (Phase Dim¹, DALI, DMX)
- CRI >90
- 700mA constant current supply
- Suitable for ceilings 5-25mm thick
- Cutout 128mm x 35mm (10.5W),
248mm x 35mm (21W)



*21W model shown



IP
20

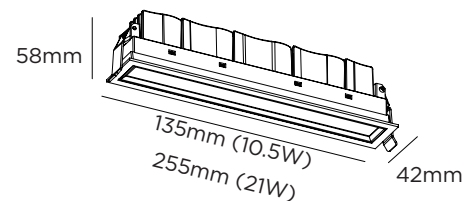

ORDERING CODE ²	DESCRIPTION	POWER (W)	LUMEN OUTPUT
			CRI 90
240820-90-YY	NYX LINEAR FLOODLIGHT 10.5W 2700K 15°	10.5	TBC
240821-90-YY	NYX LINEAR FLOODLIGHT 10.5W 2700K 36°	10.5	TBC
240822-90-YY	NYX LINEAR FLOODLIGHT 10.5W 2700K 50°	10.5	TBC
240823-90-YY	NYX LINEAR FLOODLIGHT 10.5W 3000K 15°	10.5	TBC
240824-90-YY	NYX LINEAR FLOODLIGHT 10.5W 3000K 36°	10.5	TBC
240825-90-YY	NYX LINEAR FLOODLIGHT 10.5W 3000K 50°	10.5	TBC
240826-90-YY	NYX LINEAR FLOODLIGHT 21W 2700K 15°	21	TBC
240827-90-YY	NYX LINEAR FLOODLIGHT 21W 2700K 36°	21	TBC
240828-90-YY	NYX LINEAR FLOODLIGHT 21W 2700K 50°	21	TBC
240829-90-YY	NYX LINEAR FLOODLIGHT 21W 3000K 15°	21	TBC
240830-90-YY	NYX LINEAR FLOODLIGHT 21W 3000K 36°	21	TBC
240831-90-YY	NYX LINEAR FLOODLIGHT 21W 3000K 50°	21	TBC

¹ Phase-dimming - please contact your local representative for further information.

² Ordering codes:

XX = CRI (refer to table)

YY = Control Options (ND = Non-Dim, PD = Phase Dim, DA = DALI)