

PLATINO L

ADJUSTABLE LOW-GLARE LED DOWNLIGHT • L-SERIES


40W

DESCRIPTION

Body: Die-cast Aluminium
Reflector: Optical Reflector & Glass
Trim: Aluminium (white standard, black/custom avail.)
Driver: Remote constant current
Weight: 1.74kg

FEATURES

- 5-year Electrical System Warranty
- High Colour Consistency
- Passive Cooling
- 2700K, 3000K and 4000K
- Beam angles 14°, 20° and 30°
- Dimmable (Phase Dim¹, DALI)
- CRI >90
- Cutout \varnothing 170mm
- Low Glare (30°)

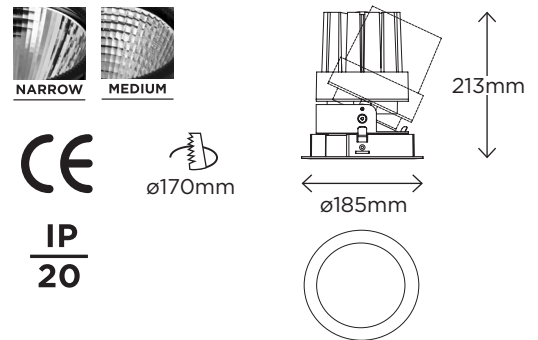

ORDERING CODE ²	DESCRIPTION	POWER (W)	LUMEN OUTPUT
			CRI 90
113120-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 2700K 14°	40	2240
113121-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 2700K 20°	40	2440
113122-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 2700K 30°	40	2560
113123-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 3000K 14°	40	2440
113124-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 3000K 20°	40	2680
113125-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 3000K 30°	40	2720
113126-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 4000K 14°	40	2480
113127-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 4000K 20°	40	2720
113128-XX-YY	PLATINO L ADJUSTABLE LED DOWNLIGHT 40W 4000K 30°	40	2800

1 Phase-dimming - please contact your local representative for further information.

2 Ordering codes:

XX = CRI (refer to table)

YY = Control Options (PD = Phase Dim, ND = Non-Dim, DA = DALI)

Specifications subject to change without notice. Updated Oct 2016.