

# GAIA 12S

## LED TRACK SPOTLIGHT • S-SERIES


12W

### DESCRIPTION

**Body:** Die-cast Aluminium (Black, White or Silver)  
**Safety Cover:** Clear Tempered Glass  
**Reflector:** Pure Anodised Aluminium 99.98%  
**Adapter:** 3-Circuit Universal Type  
**Driver:** Integral Non-dimmed (Dimming available)  
**Weight:** 0.9kg

### FEATURES

- 5-year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- Future-proof: Interchangeable LED Modules (Zhaga) — [www.zhagastandard.org](http://www.zhagastandard.org)
- Passive Cooling
- IOS (Interchangeable Optical System)
- Dimmable (DALI, 1-10V, DMX/RDM, Phase-dimming)
- CRI 80 or 90

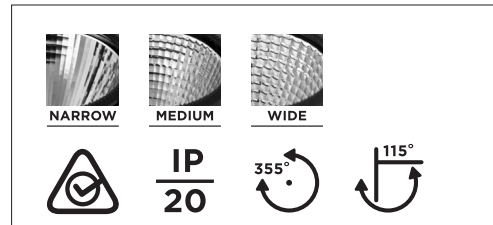

ORDERING CODE <sup>1</sup>	DESCRIPTION	POWER WATTAGE	LUMEN OUTPUT <sup>2</sup>		
			CRI 80	CRI 90	CRI 98
121020-XX-YY-Z	GAIA 12S LED SPOTLIGHT 3000K 20°	12	1320	1136	n/a
121021-XX-YY-Z	GAIA 12S LED SPOTLIGHT 3000K 40°	12	1320	1136	n/a
121022-XX-YY-Z	GAIA 12S LED SPOTLIGHT 3000K 60°	12	1320	1136	n/a
121023-XX-YY-Z	GAIA 12S LED SPOTLIGHT 4000K 20°	12	1400	1196	n/a
121024-XX-YY-Z	GAIA 12S LED SPOTLIGHT 4000K 40°	12	1400	1196	n/a
121025-XX-YY-Z	GAIA 12S LED SPOTLIGHT 4000K 60°	12	1400	1196	n/a

1 Ordering codes:  
 XX = CRI (refer to table)  
 YY = Control Options (ND = Non-Dim, DA = DALI, PD = Phase-Dimming, DMX = DMX512)  
 Z = LED module (L = Lumileds, T = Tridonic, C = Cree)  
 2 All lumen output data based on LED tp/tc point at 65°C. Please refer to website for latest LED module data and technical information.

Specifications subject to change without notice. Updated Sept 2016.

