

GAIA 25M

LED TRACK SPOTLIGHT • M-SERIES


25W

DESCRIPTION


Body: Die-cast Aluminium (Black, White or Silver)
Safety Cover: Clear Tempered Glass
Reflector: Pure Anodised Aluminium 99.98%
Adapter: 3-Circuit Universal Type
Driver: Integral Non-dimmed (Dimming available)
Weight: 0.9kg

FEATURES

- 5-year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- Future-proof: Interchangeable LED Modules (Zhaga) — www.zhagastandard.org
- Passive Cooling
- IOS (Interchangeable Optical System)
- Dimmable (DALI, 1-10V, DMX/RDM, Phase-dimming!)
- CRI 98 (3000K), CRI 80 or 90 (4000K)

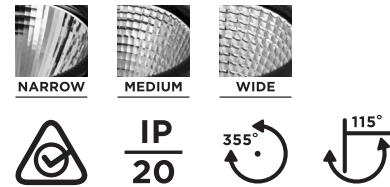

| ORDERING CODE ² | DESCRIPTION | POWER WATTAGE | LUMEN OUTPUT ³ | | |
|----------------------------|---|---------------|---------------------------|--------|--------|
| | | | CRI 80 | CRI 90 | CRI 98 |
| 121060-XX-YY-Z | GAIA 25M RECESSED LED SPOTLIGHT 3000K 20° | 25 | 3030 | 2590 | 2270 |
| 121061-XX-YY-Z | GAIA 25M RECESSED LED SPOTLIGHT 3000K 40° | 25 | 3030 | 2590 | 2270 |
| 121062-XX-YY-Z | GAIA 25M RECESSED LED SPOTLIGHT 3000K 60° | 25 | 3030 | 2590 | 2270 |
| 121063-XX-YY-Z | GAIA 25M RECESSED LED SPOTLIGHT 4000K 20° | 25 | 3105 | 2760 | n/a |
| 121064-XX-YY-Z | GAIA 25M RECESSED LED SPOTLIGHT 4000K 40° | 25 | 3105 | 2760 | n/a |
| 121065-XX-YY-Z | GAIA 25M RECESSED LED SPOTLIGHT 4000K 60° | 25 | 3105 | 2760 | n/a |



1 Ordering codes:

XX = CRI (refer to table)

YY = Control Options (ND = Non-Dim, DA = DALI, PD = Phase-Dimming, DMX = DMX512)

Z = LED module (L = Lumileds, T = Tridonic, C = Cree)

2 All lumen output data based on LED tp/tc point at 65°C. Please refer to website for latest LED module data and technical information.

Specifications subject to change without notice. Updated Sept 2016.