



Brilled



Dimensions (mm)

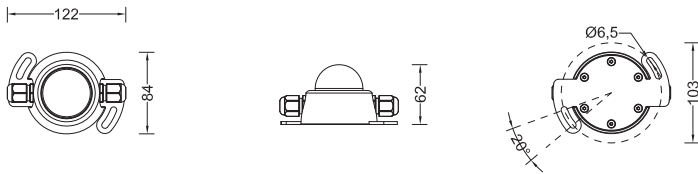

Photometric curve

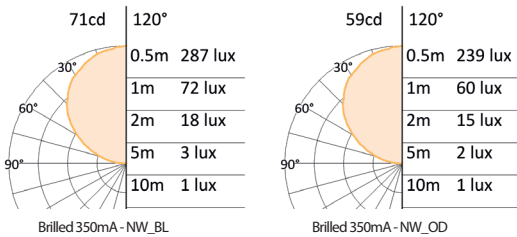

Technical specification

- Source: High power LED
- LED Count: 2
- LED life time: >50,000 hrs (L70 B50)
- Source flux: 245 lm (NW)
- Luminaire efficiency: 85 lm/W (BL)
- Input power: 2.6W
- Supply voltage: 48 VDC
- Driver: Remote power supply, integrated logic and regulator
- Insulation class: III
- Colour: White (2200K to 6000K), Red, Green, Blue, Amber
- Emission: 120° transparent or opal dome
- Working position: Any
- Fixation: 2 elongated holes Ø6.5mm
- IP rating: IP65 and IP67
- IK rating: IK 08
- Storage: -50°C to +80°C
- Connection: Daisy chain cabling, IP67 connectors
- Construction: Anodised aluminum housing, UV-stable polycarbonate dome, hermetic sealing by EPDM gasket, stainless steel screws
- Weight: 0.5 kg

Code table

product	size	finishing	control	voltage	color	optics
BRL	O2	AN	R	048	SW	BL
BRL=Brilled	O2= 2 LEDs	AN= Anodised aluminium	R= Regulator	048= 48VDC	SW = 2200 K WW= 3000 K NW= 4000 K CW = 6000 K MR = Red MG= Green MB = Blue MA = Amber	BL = Bare Led OD = Opal diffuse

Specification are subject to change without notice.
rev . Datasheet Brilled 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer