



Day



Dimensions (mm)

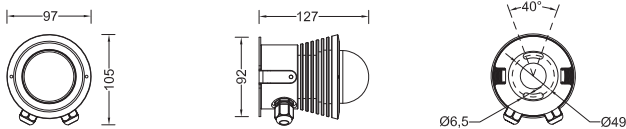

Photometric curve



Technical specification

Source:
High power LED
LED Count:
4
LED life time:
>50.000 hrs (L70 B50)
Source flux:
840 Lm (NW)
Luminaire efficiency:
67 lm/W (NW_AS)
Input power:
11W
Supply voltage:
48 VDC (On/Off), 500mA (Remote driver)
Driver:
Remote power supply and integrated current regulator (On/Off), Separated (Remote driver)
Insulation class:
III
Protections:
Short circuit, overload, over voltage and thermal (On/Off)
Colour:
White (2200K to 6000K), Red, Green, Blue, Amber
Emission:
Asymmetric reflector
Working position:
Any
Fixation:
2 elongated holes Ø6.5 mm
IP rating:
IP65 and IP67
IK rating:
IK 08
Storage:
-50°C to +80°C
Connection:
Free end cable, 0.8m length
Construction:
Anodised aluminum body, UV-stable polycarbonate dome, hermetic sealing by silicone gaskets, stainless steel screws and AISI 316 stainless steel bracket
Weight:
0.9 kg

Code table

product	size	finishing	control	voltage	color	optics
DAY	10	AN	R	048	SW	AS
DAY= Day	10	AN= Anodised Aluminium	R= With regulator S= Separated	048= 48VDC 000= Constant current	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber	AS= Asymmetric

Specification are subject to change without notice.
rev. datasheet Day 1215EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer