



Elle 20



Dimensions (mm)

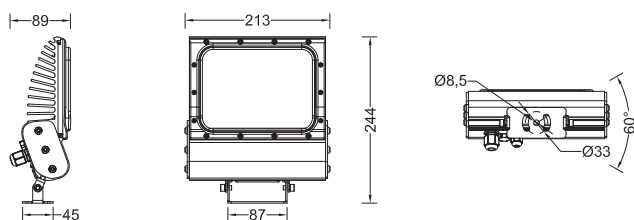

Photometric curve

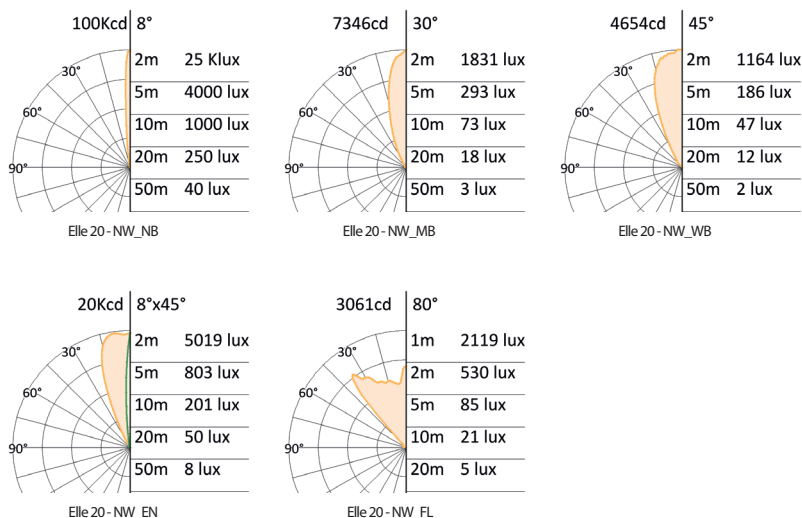

Technical specification

Source:
High power LED
LED Count:
24
LED life time:
>50,000 hrs (L70 B50)
Source flux:
3670 lm (NW)
Luminaire efficiency:
74.5 lm/W (NW_NB)
Input power:
40W
Supply voltage:
230V 50/60Hz
Driver:
Integrated with PFC
Insulation class:
I (Class II upon request)
Protections:
Short circuit, overload, over voltage and thermal
Colour:
White (2200 K to 6000 K), RGBW, RGBA, Tunable White (2200 K to 6000 K), Red, Green, Blue, Amber
Emission:
PC precision optics 8°, 30°, 45°, 8° x 45°, reflector 80°
Working position:
Any
Fixation:
1 bracket with 2 elongated holes Ø8.5 mm and 1 hole Ø8.5 mm
IP rating:
IP65 and IP67
IK rating:
IK 08
Storage:
-50°C to +80°C
Control:
On/Off or standard DMX-512A/RDM
DMX channels:
1 (mono), 4 (RGBW, RGBA, TW)
Connection:
2 free end cables (1 for power, 1 for signal) for DMX version, 1 free end cable for On/Off version, 0.8 m cable length
Construction:
Anodised aluminum extruded body, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by EPDM gasket, stainless steel screws, AISI 316 stainless steel accessories and brackets
Weight:
3 kg (On/Off), 3.2 kg (DMX)

Code table

product	size	finishing	control	voltage	color	optics
ELE	20	AN	X	230	SW	NB
ELE= Elle	20= 200mm	AN= Anodised aluminium	X= Without DMX D= DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber RW = RGB+White RA = RGB+Amber TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics

Specification are subject to change without notice.
rev. datasheet Elle 20 1215EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer