



Elle 80



Dimensions (mm)

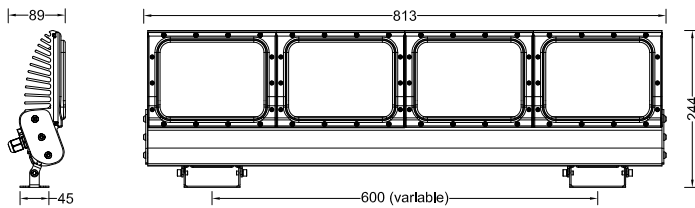

Photometric curve

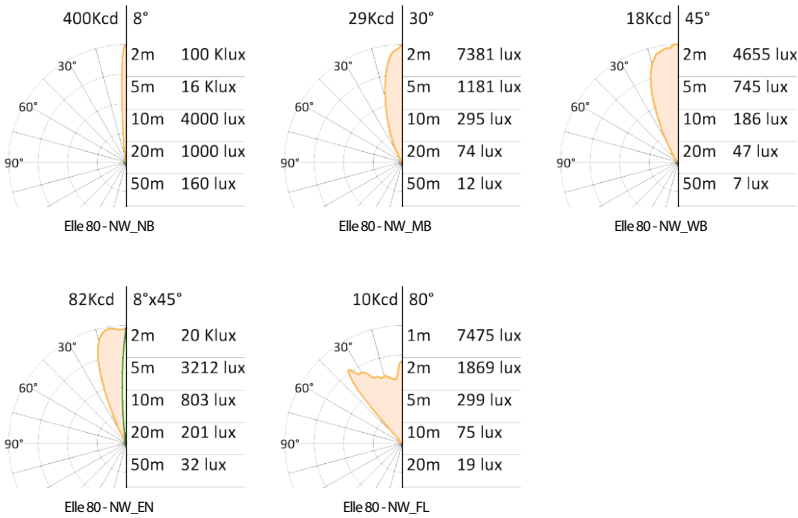

Code table

product	size	finishing	control	voltage	color	optics
ELE	80	AN	X	230	SW	NB
ELE= Elle	80= 800mm	AN= Anodised Aluminium	X= Without DMX D= DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW= 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber RW = RGB+White RA = RGB+Amber TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics

Specification are subject to change without notice.
rev . Datasheet Elle 80 0316EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Technical specification

Source:
High power LED
LED Count:
96
LED life time:
>50,000 hrs (L70 B50)
Source flux:
14,680 lm (NW)
Luminaire efficiency:
78.5 lm/W (NW_NB)
Input power:
152W
Supply voltage:
230V 50/60Hz
Driver:
Integrated with PFC
Insulation class:
I (Class II upon request)
Protections:
Short circuit, overload, over voltage and thermal
Colour:
White (2200 K to 6000 K), RGBW, RGBA, Tunable White (2200 K to 6000 K), Red, Green, Blue, Amber
Emission:
PC precision optics 8°, 30°, 45°, 8° x 45°, reflector 80°
Working position:
Any
Fixation:
2 brackets with 2 elongated holes Ø8.5 mm and 1 hole Ø8.5 mm
IP rating:
IP65 and IP67
IK rating:
IK 08
Working temperature:
Operating: -30°C to +50°C
Storage: -50°C to +80°C
Control:
On/Off or standard DMX-512A/RDM
DMX channels:
1 (mono), 4 (RGBW, RGBA, TW)
Connection:
2 free end cables (1 for power, 1 for signal) for DMX version,
1 free end cable for On/Off version, 0.8 m cable length
Construction:
Anodised aluminum extruded body, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by EPDM gasket, stainless steel screws, AISI 316 stainless steel accessories and brackets
Weight:
8.5 kg (On/Off), 9.3 kg (DMX)

Authorised Dealer