



Eye



Dimensions (mm)

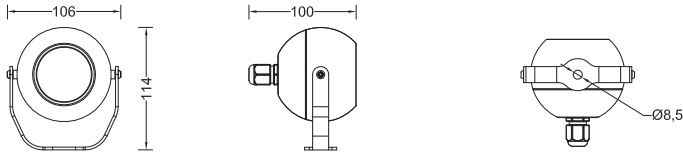

Photometric curve

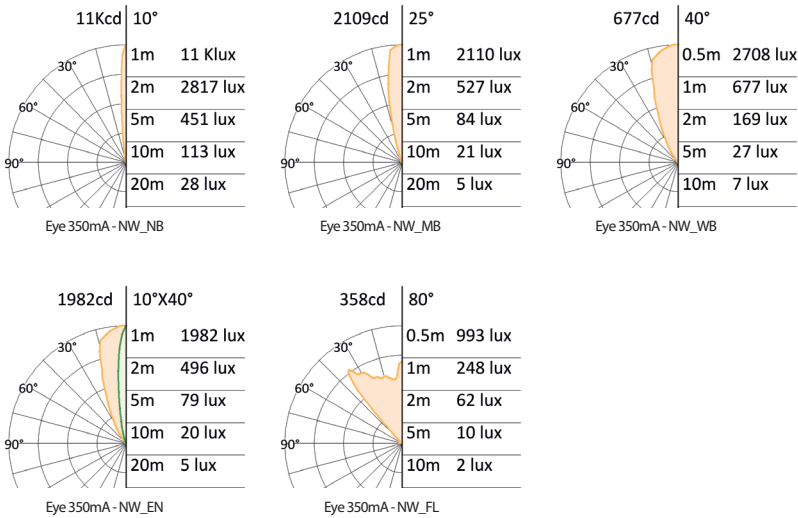

Technical specification

Source:
High power LED
LED Count:
4
LED life time:
>50,000 hrs (L70 B50)
Source flux:
490 lm (NW)
Luminaire efficiency:
68 lm/W (NW_NB)
Input power:
6W
Supply voltage:
230V 50/60Hz
Driver:
Integrated
Insulation class:
I
Protections:
Short circuit, overload, over voltage and thermal
Colour:
White (2200 K to 6000 K), Red, Green, Blue, Amber
Emission:
PMMA precision optics 10°, 25°, 40°, 10° x 40°, reflector 80°
Working position:
Any
Fixation:
Hole Ø8.5 mm
IP rating:
IP65 and IP67
IK rating:
IK 08
Storage:
-50°C to +80°C
Connection:
Free end cable, 0.8 m length
Construction:
Anodised aluminum body, tempered front glass, hermetic sealing by EPDM gasket, stainless steel screws, AISI 316 stainless steel accessories and bracket
Weight:
0.85 kg

Code table

product	size	finishing	control	voltage	color	optics
EYE	04	AN	X	230	SW	NB
EYE= Eye	04= 4 LEDs	AN= Anodised Aluminium	X= Without DMX	230= 230V 50/60 Hz	SW= 2200 K WW= 3000 K NW= 4000 K CW= 6000 K MR= Red MG= Green MB= Blue MA= Amber	NB= Narrow beam MB= Medium beam WB= Wide beam EN= Elliptical narrow FL= Flood optics

Specification are subject to change without notice.
rev. datasheet eye 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer