


Flexi 900

Technical specification


Source:
High Power LED
LED Count:
27
LED life time:
>50,000 hrs (L70 B50)
Source flux:
3300 lm (NW)
Luminaire efficiency:
81 lm/W (NW_NB)
Input power:
33W
Supply voltage:
230V 50/60Hz
Driver:
Integrated
Insulation class:
I
Protections:
Short circuit, overload, over voltage and thermal
Colour:
White (2200K to 6000K), RGB, Tunable White (from 2200K to 6000K), Red, Green, Blue, Amber
Emission:
PC precision optics 8°, 30°, 45°, 8°x45°, 100°, 40°x75° reflector, 120° diffused or opal
Working position:
Horizontal (fixing accessories available)
IP rating:
IP20
Storage:
-50°C to +80°C
External surface:
<35°C (Ta = 25°)
Control:
Standard DMX-512A/RDM, 3 independent modules
DMX channels:
3 (mono), 9 (RGB, TW)
Connection:
Through cabling, recessable cable mount male plug with 80mm cable and panel-mount female plug
Construction:
Anodised extruded aluminium body, UV-stable polycarbonate cover, stainless steel screws
Weight:
2.0 kg



Dimensions (mm)



Photometric curve

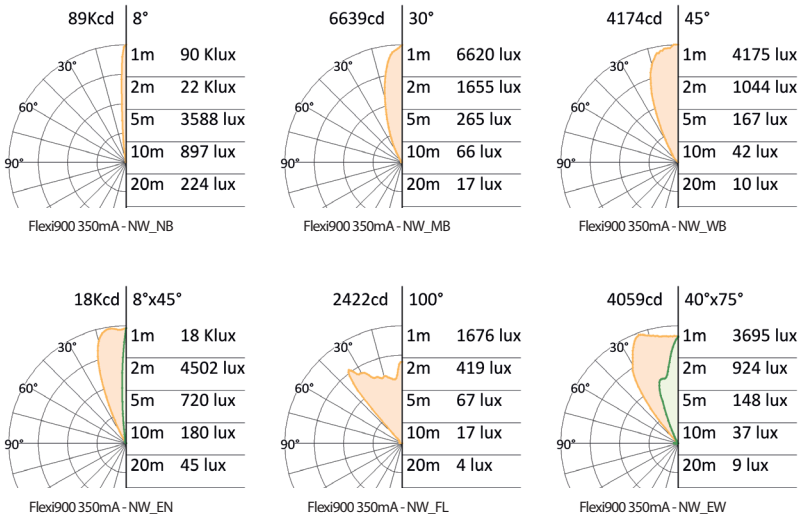

Code table

product	size	finishing	control	voltage	color	optics
FLX	09	AN	D	230	SW	NB
FLX= Flexi	09= 900mm	AN= Anodised aluminium	D= DMX	230= 230V 50/60 Hz	SW = 2200 K WW = 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber RT = RGB TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics EW = Elliptical wide BL = Bare Led OD = Opal Diffuse

Specification are subject to change without notice.
rev . datasheet Flexi 900 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer