





Dimensions (mm)

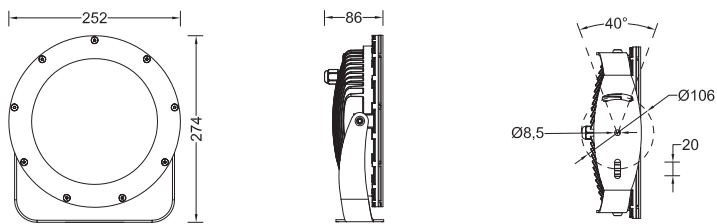

Photometric curve

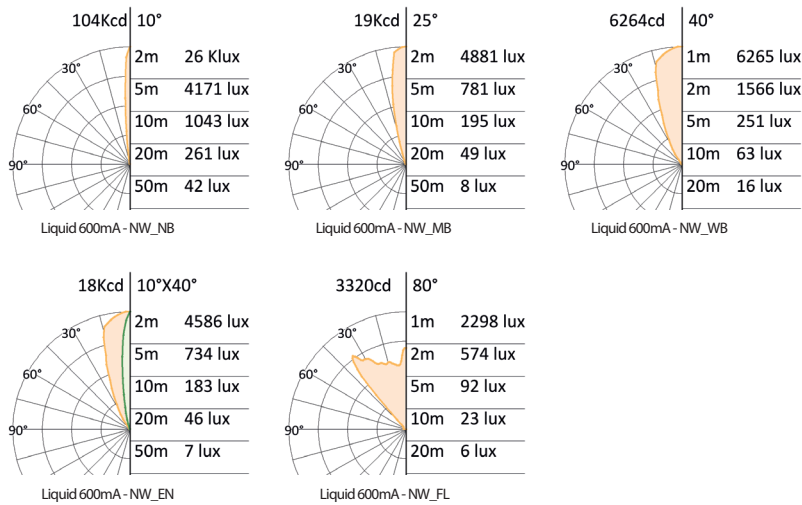

Code table

product	size	finishing	control	voltage	color	optics
LID	24	AP	R	012	SW	NB
LID= Liquid	24=LEDs	AP= Anodized painted	R= Regulator D= DMX	012 = 12Vdc	SW = 2200 K WW= 3000 K NW= 4000 K CW= 6000 K MR = Red MG = Green MB = Blue MA = Amber RW = RGB + White RA = RGB + Amber TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics

Specification are subject to change without notice.
rev . Datasheet Liquid 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Liquid

Technical specification

Source:
High power LED
LED Count:
24
LED life time:
>50,000 hrs (L70 B50)
Source flux:
4515 lm (NW)
Luminaire efficiency:
62.5 lm/W (NW_NB)
Input power:
60W
Supply voltage:
Up 12 to 24 VDC
Driver:
Remote power supply and integrated regulator
Insulation class:
III
Protections:
Short circuit, overload, over voltage and thermal
Colour:
White (2200 K to 6000 K), RGBW, RGBA, Tunable White (2200 K to 6000 K), Red, Green, Blue, Amber
Emission:
PMMA precision optics 10°, 25°, 40°, 10°x40°, reflector 80°
Working position:
Underwater (permanent or temporary)
Fixation:
2 elongated holes Ø8.5 mm and 1 hole Ø8.5 mm
IP rating:
IP68
IK rating:
IK 10
Storage:
-50°C to +80°C
Control:
No control (On/Off) or via control accessories (DMX-512A)
DMX channels:
1 (mono), 4 (RGBW, RGBA, TW)
Connection:
Free end cable, 3 m standard length
Construction:
Anodised painted die-cast aluminum housing, UV-stable Polycarbonate clear enclosure, hermetic sealing by EPDM gaskets, stainless steel screws, AISI 316 stainless steel accessories and bracket
Weight:
4.3 kg

Authorised Dealer