



# Planet 7



## Dimensions (mm)

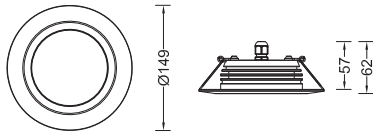

## Photometric curve

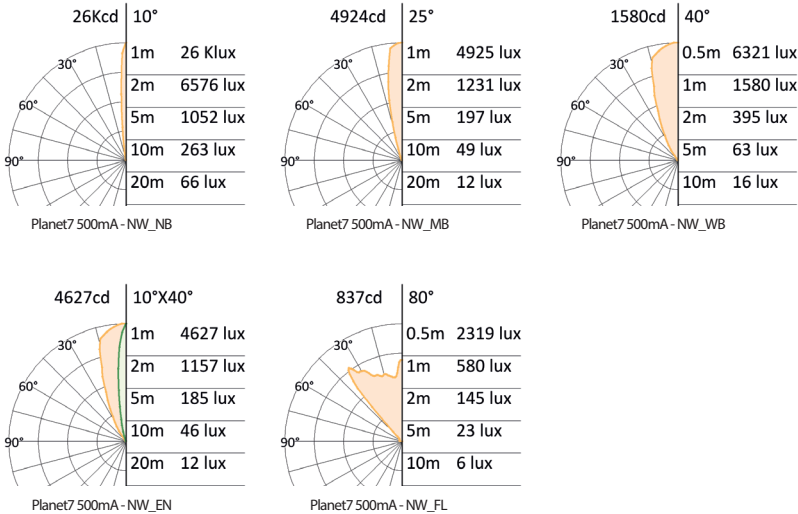

## Technical specification

Source:  
High power LED  
LED Count:  
7  
LED life time:  
>50.000 hrs (L70 B50)  
Source flux:  
1140 Lm (NW)  
Luminaire efficiency:  
73 Lm/W (NW\_NB)  
Input power:  
13 W  
Supply voltage:  
500 mA  
Driver:  
Remote  
Insulation class:  
III  
Colour:  
White (2200 K to 6000 K)  
Emission:  
PMMA precision optics 10°, 25°, 40°, 10°x40°, reflector 80° or 120° diffusing glass  
Working position:  
Recessed downlight  
Fixation:  
Spring mount, reversible, up to 20 mm thick panel  
IP rating:  
IP65 and IP67  
Storage:  
-50°C to +80°C  
Connection:  
Free end cable, 0.3 m length  
Construction:  
Anodised aluminum body, tempered front glass, hermetic sealing by silicone, anodised aluminum front plate  
Weight:  
0.7 kg

## Code table

product	size	finishing	control	voltage	color	optics
PLT	07	AN	S	000	SW	NB
PLT= Planet	07= 7 LEDs	AN= Anodised Aluminium	S= Separated	000= Constant current	SW= 2200 K WW= 3000 K NW= 4000 K CW= 6000 K	NB= Narrow beam MB= Medium beam WB= Wide beam EN= Elliptical narrow FL= Flood optics

Specification are subject to change without notice.  
rev . datasheet Planet7 1115EN

Space Cannon Australia Pty Ltd  
1/169 Beavers Road | Northcote | Vic | 3070  
T (+61 3) 9486 5366 | sales@spacecannon.com.au  
www.spacecannon.com.au

Authorised Dealer