



Prospect



Dimensions (mm)

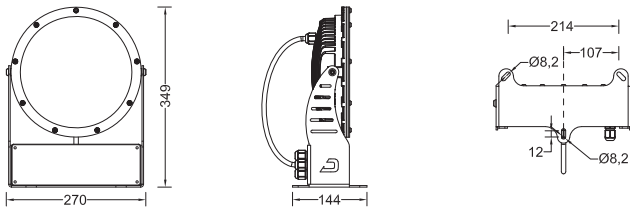

Photometric curve

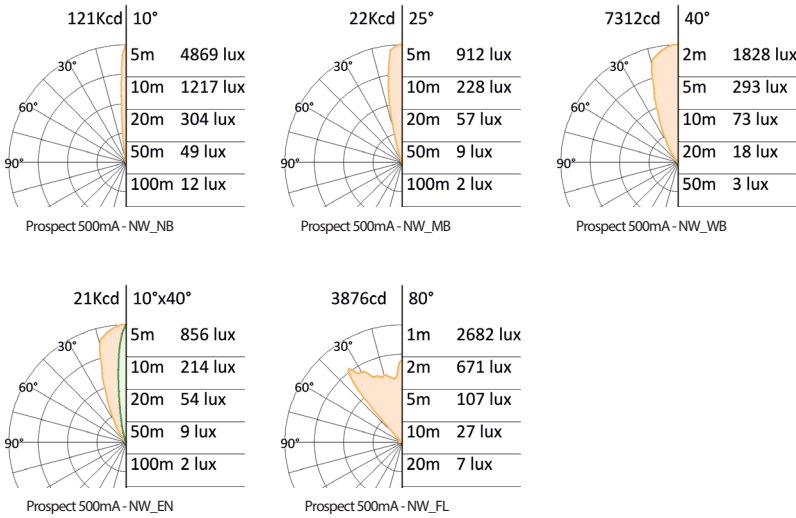

Technical specification

Source:
High power LED
LED Count:
36
LED life time:
>50,000 hrs (L70 B50)
Source flux:
5270 lm (NW)
Luminaire efficiency:
73 lm/W (NW_NB)
Input power:
60W
Supply voltage:
230V 50/60Hz
Driver:
Integrated with PFC
Insulation class:
I
Protections:
Short circuit, overload, over voltage and thermal protection
Colour:
White (2200 K to 6000 K), RGBW, RGBA, Tunable White (2200 K to 6000 K), Red, Green, Blue, Amber
Emission:
PMMA precision optics 10°, 25°, 40°, 10° x 40°, reflector 80°
Working position:
Any
Fixation:
3 elongated holes Ø8.2 mm
IP rating:
IP65
IK rating:
IK 08
Storage:
-50°C to +80°C
Control:
Standard DMX-512A/RDM
DMX channels:
1 (mono), 4 (RGBW, RGBA, TW)
Connection:
2 free end cables (1 for power, 1 for signal) for DMX version,
1 free end cable for On/Off version, 0.8 m cable length
Construction:
Painted aluminum housing, UV-stable polycarbonate cover, hermetic sealing by EPDM gasket, stainless steel screws, painted aluminum box and bracket
Weight:
5.3 kg

Code table

product	size	finishing	control	voltage	color	optics
PRT	36	PT	X	230	SW	NB
PRT= Prospect	36= 36 LEDs	PT= Painted aluminium	X= Without DMX D= DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber RW = RGB+White RA = RGB+Amber TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics

Specification are subject to change without notice.
rev . datasheet Prospect 1215EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer