



Smalled



Dimensions (mm)

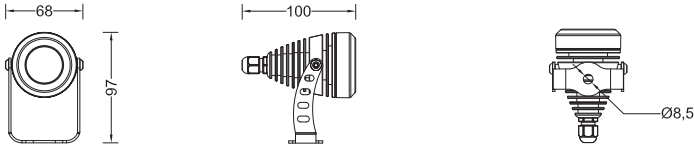

Photometric curve

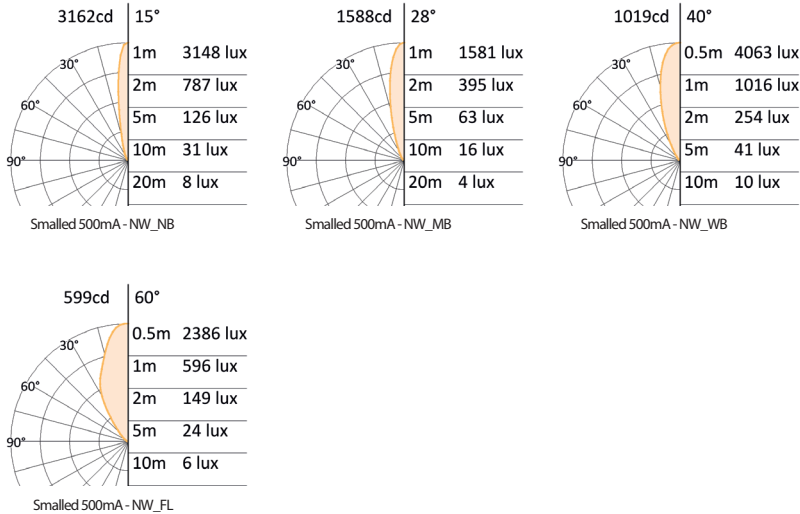

Technical specification

- Source: High power LED
- LED Count: 4
- LED life time: >50,000 hrs (L70 B50)
- Source flux: 650 lm (NW)
- Luminaire efficiency: 74 lm/W (NW_NB)
- Input power: 7W
- Supply current: 500 mA
- Driver: Remote
- Insulation class: III
- Colour: White (2200 K to 6000 K), Red, Green, Blue, Amber
- Emission: PMMA precision optics 15°, 28°, 40°, 60°
- Working position: Any
- Fixation: Hole Ø8.5 mm
- IP rating: IP65 and IP67
- IK rating: IK 08
- Storage: -50°C to +80°C
- Connection: Free end cable, 0.8 m length
- Construction: Anodised aluminum body and bracket, tempered front glass, hermetic sealing by silicone gaskets, stainless steel screws
- Weight: 0.35 Kg

Code table

product	size	finishing	control	voltage	color	optics
SML	04	AN	S	000	SW	NB
SML= Smalled	04= 4 LEDs	AN= Anodised Aluminium	S= Separated	000= Constant current	SW= 2200 K WW= 3000 K NW= 4000 K CW= 6000 K MR= Red MG= Green MB= Blue MA= Amber	NB= Narrow beam MB= Medium beam WB= Wide beam FL= Flood optics

Specification are subject to change without notice.
rev . datasheet smalled 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer