



Star



Dimensions (mm)



Photometric curve

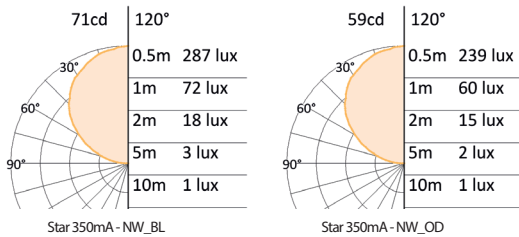

Technical specification

Source:
 High power LED
LED Count:
 3
LED life time:
 >50,000 hrs (L70 B50)
Source flux:
 365 lm (NW)
Luminaire efficiency:
 81.2 lm/W (NW_BL)
Input power:
 4W
Supply voltage:
 48 VDC
Driver:
 Remote power supply
Insulation class:
 III
Protections:
 Thermal
Colour:
 White (2200K to 6000K), RGB, Tunable White (from 2200K to 6000K), Red, Green, Blue, Amber
Emission:
 120° transparent or opal dome
Working position:
 Wall recessed
Fixation:
 2 elongated holes Ø4.5mm
IP rating:
 IP65 and IP67
IK rating:
 IK 08
Storage:
 -50°C to +80°C
Control:
 Standard DMX-512A/RDM
DMX channels:
 1 (mono), 3 (RGB, TW)
Connection:
 2 cables with connectors M12 (IP67 - In/out), 0.8m length
Construction:
 Anodised aluminum body, UV-stable polycarbonate dome, hermetic sealing by silicone and EPDM gasket, Inox screws
Weight:
 0.6 kg

Code table

product	size	finishing	control	voltage	color	optics
STR	03	AN	D	048	SW	BL
STR= Star	03=LEDs	AN= Anodised aluminium	D= DMX	048= 48Vdc	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber RT = RGB TW = SW to CW	BL = Bare Led OP = Opal diffuse

Specification are subject to change without notice.
rev . Datasheet Star 1115EN

Space Cannon Australia Pty Ltd
 1/169 Beavers Road | Northcote | Vic | 3070
 T (+61 3) 9486 5366 | sales@spacecannon.com.au
 www.spacecannon.com.au

Authorised Dealer