



Stepled 1



Dimensions (mm)



Photometric curve

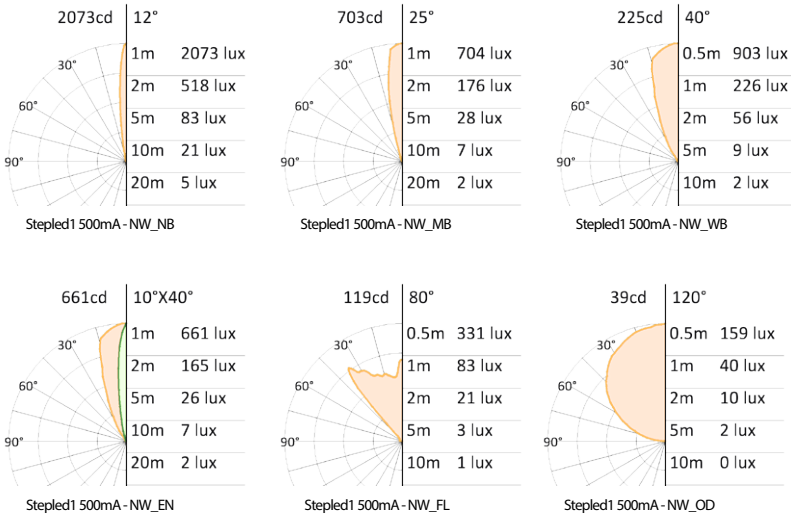

Technical specification

Source:
High power LED
LED Count:
1
LED life time:
>50.000 hrs (L70 B50)
Source flux:
165 lm (NW)
Luminaire efficiency:
69 lm/W (NW_NB)
Input power:
1.8W
Supply Current:
500mA
Driver:
Remote
Insulation class:
III
Colour:
White (2200K to 6000K), Red, Green, Blue, Amber
Emission:
PMMA precision optics 12°, 25°, 40°, 10°x40°, reflector 80° or 120° diffusing glass
Working position:
Recessed
Fixation:
Rubber lock, reversible
IP rating:
IP65 and IP67
IK rating:
IK 08
Storage:
-50°C to +80°C
Maximum glass temp.:
<35° (TA=20°)
Connection:
2 free end wires, 0.8 m length
Construction:
Anodised aluminum body, tempered front glass, hermetic sealing by silicone gasket, anodised aluminum or AISI 316 stainless steel front plate
Weight:
0.1 kg

Code table

product	size	finishing	control	voltage	color	optics
STL	01	AN	S	000	SW	NB
STL= Stepled	01= 1 LEDs	AN= Anodised aluminium SS= Stainless steel front plate	S= Separated	000= Constant current	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics OD = Opal diffuse

Specification are subject to change without notice.
rev . datasheet Stepled1.indd 0616EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer