



Stepled 3



Dimensions (mm)

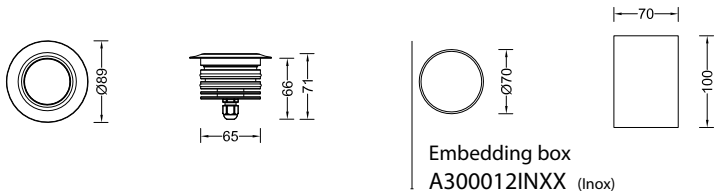

Photometric curve

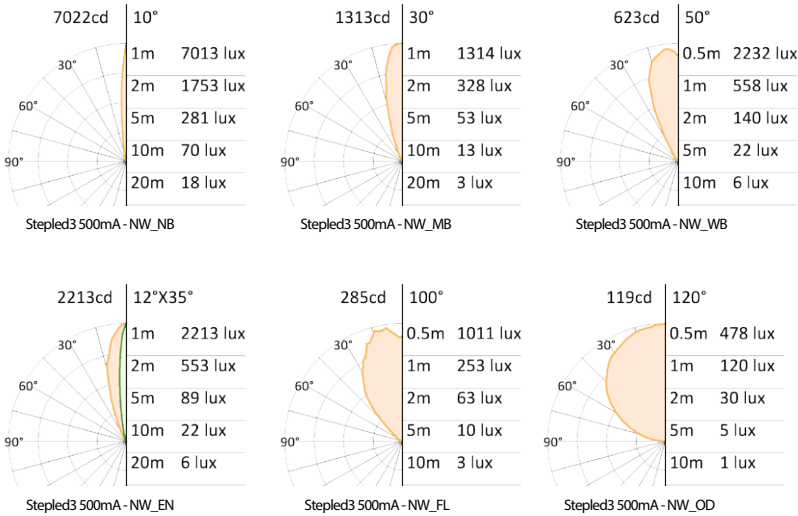

Technical specification

- Source: High power LED
- LED Count: 3
- LED life time: >50,000 hrs (L70 B50)
- Source flux:** 490 lm (NW)
- Luminaire efficiency:** 71.5 lm/W (NW_NB)
- Input power: 5.5 W
- Supply current: 500mA
- Driver: Remote
- Insulation class: III
- Colour: White (2200K to 6000K), Red, Green, Blue and Amber
- Emission: PMMA precision optics 10°, 30°, 50°, 100°, 12°x35° or 120° diffusing glass
- Working position: Recessed
- Fixation: Rubber lock, reversible
- IP rating: IP65 and IP67
- IK rating: IK 08
- Storage: -50°C to +80°C
- Maximum glass temp.: <35° (TA=20°)
- Control: No control (On/Off)
- Connection: 2 free end wires, 0,8 m length
- Construction: Anodised aluminum body, tempered front glass, hermetic sealing by silicone gasket, anodised aluminum or AISI 316 stainless steel front plate
- Weight: 0.3 kg

Code table

product	size	finishing	control	voltage	color	optics
STL	03	AN	S	000	SW	NB
STL= Stepled	03= 3 LEDs	AN= Anodised aluminium SS= Stainless steel front plate	S= Separated	000= Constant current	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics OD = Opal diffuse

Specification are subject to change without notice.
rev . datasheet Stepled3 v2 0616EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer