






Dimensions (mm)

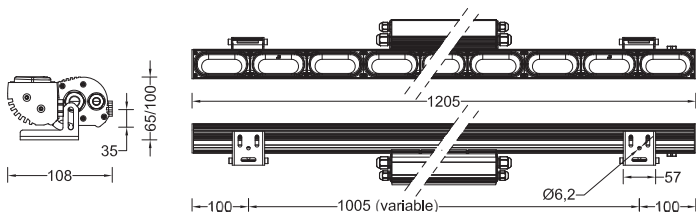


Photometric curve




Sylverline Compact 1200 - NW_NB




Sylverline Compact 1200 - NW_MB

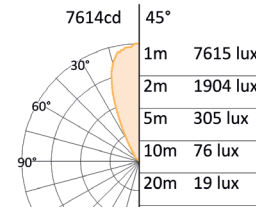


Sylverline Compact 1200 - NW_WB



Sylverline Compact 1200 - NW_EN

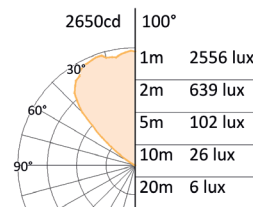

Sylverline Compact 1200 - NW_FL

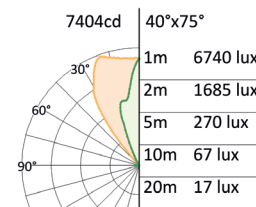

Sylverline Compact 1200 - NW_EW

Code table

product	size	finishing	control	voltage	color	optics
COM	12	AN	X	230	SW	NB
COM= Sylverline Compact	12= 1200 mm	AN= Anodised aluminium	X= Without DMX D= DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG= Green MB = Blue MA = Amber RT = RGB RW = RGB+White RA = RGB+Amber TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics EW = Elliptical wide

Specification are subject to change without notice.
rev. Datasheet Sylverline Compact 1200 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Technical specification

Source:
High power LED
LED Count:
36 (mono, RGB, TW), 48 (RGBW, RGBA)
LED life time:
>50,000 hrs (L70 B50)
Source flux:
6000 lm (NW)
Luminaire efficiency:
74 lm/W (NW_NB)
Input power:
66W
Supply voltage:
230V 50/60Hz
Driver:
Integrated with PFC
Insulation class:
I
Protections:
Short circuit, overload, over voltage and thermal
Colour:
White (2200K to 6000K), RGBW, RGBA, Tunable White (2200K to 6000K), Red, Green, Blue, Amber
Emission:
PC precision optics 8°, 30°, 45°, 8°x45°; reflector for 100°, 40°x75°
Working position:
Any
Fixation:
2 brackets with 3 elongated holes Ø6.2mm and 1 hole Ø6.2mm
IP rating:
IP65 and IP67
IK rating:
IK 08
Storage:
-50°C to +80°C
Control:
On/Off or standard DMX-512A/RDM
DMX channels:
1 (mono), 3 (RGB, TW), 4 (RGBW, RGBA)
Connection:
Daisy chain cabling, IP67 connectors
Construction:
Anodised aluminum extruded body, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by silicone gaskets, AISI 316 stainless steel brackets and stainless steel screws
Weight:
4.0 kg

Authorised Dealer