



Sylverline Compact 600




Dimensions (mm)

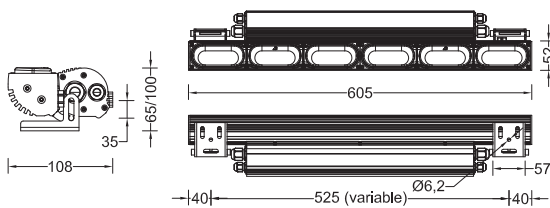


Photometric curve




Sylverline Compact 600 - NW_NB




Sylverline Compact 600 - NW_MB




Sylverline Compact 600 - NW_WB



Sylverline Compact 600 - NW_EN



Sylverline Compact 600 - NW_FL



Sylverline Compact 600 - NW_EW

Code table

product	size	finishing	control	voltage	color	optics
COM	06	AN	X	230	SW	NB
COM= Sylverline Compact	06= 600mm	AN= Anodised aluminium	X= Without DMX D= DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW= 4000 K CW = 6000 K MR = Red MG= Green MB = Blue MA = Amber RT = RGB RW = RGB+White RA = RGB+Amber TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics EW = Elliptical wide

Specification are subject to change without notice.
rev. Datasheet Sylverline Compact 600 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Technical specification

Source:

High power LED

LED Count:

18 (mono, RGB, TW), 24 (RGBW, RGBA)

LED life time:

>50,000 hrs (L70 B50)

Source flux:

2930 lm (NW)

Luminaire efficiency:

72 lm/W (NW_NB)

Input power:

33W

Supply voltage:

230V 50/60Hz

Driver:

Integrated with PFC

Insulation class:

I

Protections:

Short circuit, overload, over voltage and thermal

Colour:

White (2200K to 6000K), RGBW, RGBA, Tunable White (2200K to 6000K), Red, Green, Blue, Amber

Emission:

PC precision optics 8°, 30°, 45°, 8°x45°; reflector for 100°, 40°x75°

Working position:

Any

Fixation:

1 bracket with 3 elongated holes Ø6.2mm and 1 hole Ø6.2mm

IP rating:

IP65 and IP67

IK rating:

IK 08

Storage:

-50°C to +80°C

Control:

On/Off or standard DMX-512A/RDM

DMX channels:

1 (mono), 3 (RGB, TW), 4 (RGBW, RGBA)

Connection:

Daisy chain cabling, IP67 connectors

Construction:

Anodised aluminum extruded body, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by silicone gaskets, AISI 316 stainless steel brackets and stainless steel screws

Weight:

2.6 kg

Authorised Dealer