





## Dimensions (mm)

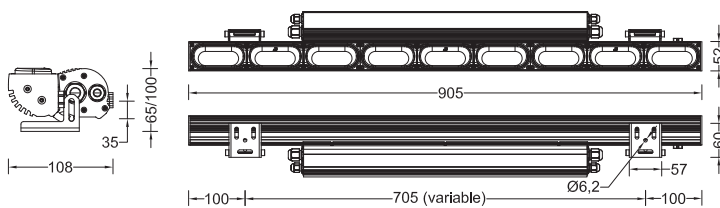

## Photometric curve

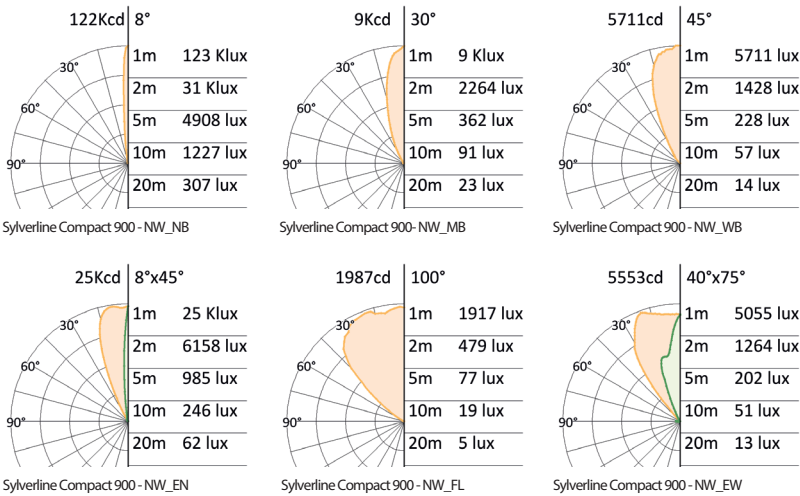

## Technical specification

Source:  
High power LED  
LED Count:  
27 (mono, RGB, TW), 36 (RGBW, RGBA)  
LED life time:  
>50,000 hrs (L70 B50)  
Source flux:  
4500 lm (NW)  
Luminaire efficiency:  
73 lm/W (NW\_NB)  
Input power:  
50W  
Supply voltage:  
230V 50/60Hz  
Driver:  
Integrated with PFC  
Insulation class:  
I  
Protections:  
Short circuit, overload, over voltage and thermal  
Colour:  
White (2200K to 6000K), RGBW, RGBA, Tunable White (2200K to 6000K), Red, Green, Blue, Amber  
Emission:  
PC precision optics 8°, 30°, 45°, 8°x45°; reflector for 100°, 40°x75°  
Working position:  
Any  
Fixation:  
2 brackets with 3 elongated holes Ø6.2mm and 1 hole Ø6.2mm  
IP rating:  
IP65 and IP67  
IK rating:  
IK 08  
Storage:  
-50°C to +80°C  
Control:  
On/Off or Standard DMX-512A/RDM  
DMX channels:  
1 (mono), 3 (RGB, TW), 4 (RGBW, RGBA)  
Connection:  
Daisy chain cabling, IP67 connectors  
Construction:  
Anodised aluminum extruded body, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by silicone gaskets, AISI 316 stainless steel brackets and stainless steel screws  
Weight:  
3.3 kg

## Code table

product	size	finishing	control	voltage	color	optics
COM	09	AN	X	230	SW	NB
COM= Sylverline Compact	09= 900mm	AN= Anodised aluminium	X= Without DMX D= DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW= 4000 K CW = 6000 K MR = Red MG= Green MB = Blue MA = Amber RT = RGB RW = RGB+White RA = RGB+Amber TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics EW = Elliptical wide

Specification are subject to change without notice.  
rev. Datasheet Sylverline Compact 900 1115EN

Space Cannon Australia Pty Ltd  
1/169 Beavers Road | Northcote | Vic | 3070  
T (+61 3) 9486 5366 | sales@spacecannon.com.au  
www.spacecannon.com.au

Authorised Dealer