



Dimensions (mm)

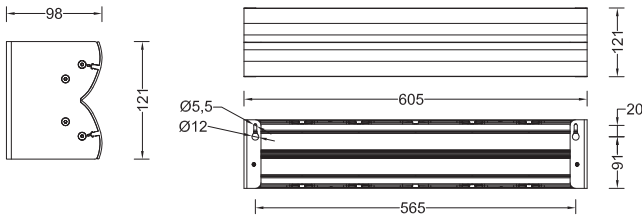

Photometric curve

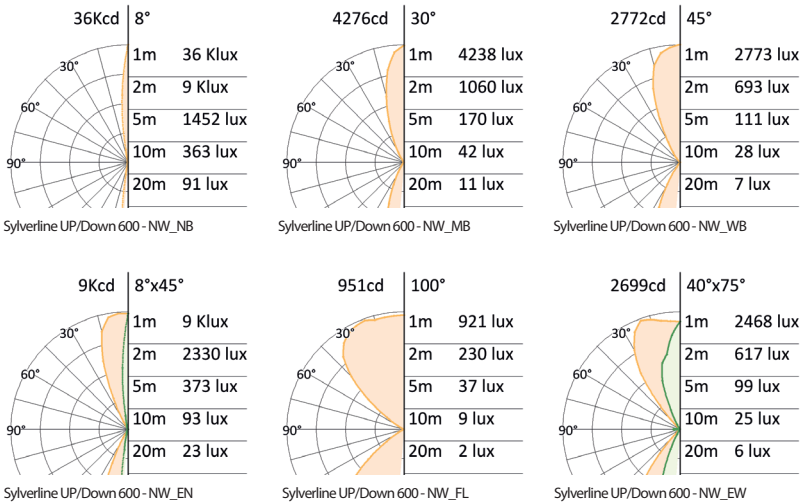

Technical specification

Source:
 High power LED
LED Count:
 36
LED life time:
 >50,000 hrs (L70 B50)
Source flux:
 4400 lm (NW)
Luminaire efficiency:
 74.5 lm/W (NW_NB)
Input power:
 48W
Supply voltage:
 230V 50/60Hz
Driver:
 Integrated
Insulation class:
 I
Protections:
 Short circuit, overload, over voltage and thermal
Colour:
 White (2200K to 6000K), Red, Green, Blue, Amber
Emission:
 PC precision optics 8°, 30°, 45°, 8°x45°, 100° and 40°x75° reflector
Working position:
 Any
Fixation:
 2 elongated hole Ø5.5mm
IP rating:
 IP65 and IP67
IK rating:
 IK 08
Storage:
 -50°C to +80°C
Connection:
 Free end cable, 0.8m length
Construction:
 Anodised aluminum extruded body, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by silicone gasket, stainless steel screws
Weight:
 3.4 kg

Code table

product	size	finishing	control	voltage	color	optics
UPD	06	AN	X	230	SW	NB
UPD= Sylverline UP/Down	06= 600mm	AN= Anodised aluminium	X= Without DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW= 4000 K CW= 6000 K MR = Red MG= Green MB = Blue MA = Amber	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics EW = Elliptical wide

Specification are subject to change without notice.
rev. Datasheet Sylverline UP_DOWN 600 1115EN

Space Cannon Australia Pty Ltd
 1/169 Beavers Road | Northcote | Vic | 3070
 T (+61 3) 9486 5366 | sales@spacecannon.com.au
 www.spacecannon.com.au

Authorised Dealer