



# Sylverline Boxed 900



## Dimensions (mm)

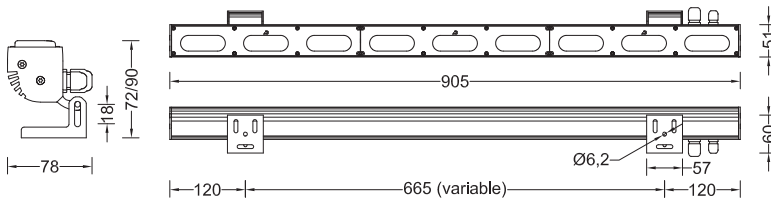

## Photometric curve

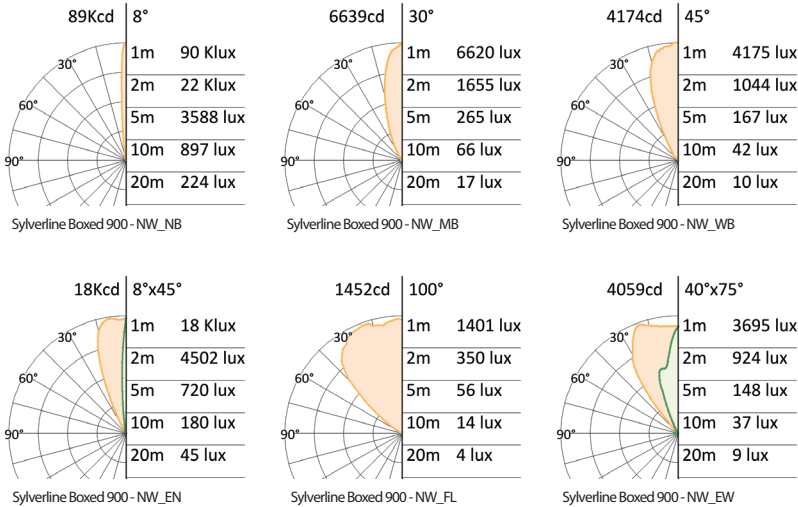

## Code table

product	size	finishing	control	voltage	color	optics
BOX	09	AN	X	230	SW	NB
BOX= Sylverline Boxed	09= 900mm	AN= Anodised aluminium	X= Without DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber RT = RGB TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics EW = Elliptical wide

Specification are subject to change without notice.  
rev . datasheet Sylverline boxed 900 1115EN

Space Cannon Australia Pty Ltd  
1/169 Beavers Road | Northcote | Vic | 3070  
T (+61 3) 9486 5366 | sales@spacecannon.com.au  
www.spacecannon.com.au

## Technical specification

Source:  
High power LED  
LED Count:  
27  
LED life time:  
>50,000 hrs (L70 B50)  
Source flux:  
3300 lm (NW)  
Luminaire efficiency:  
74 lm/W (NW\_NB)  
Input power:  
36W  
Supply voltage:  
230V 50/60Hz  
Driver:  
Integrated with PFC  
Insulation class:  
I  
Protections:  
Short circuit, overload, over voltage and thermal  
Colour:  
White (2200K to 6000K), RGB, Tunable White (2200K to 6000K),  
Red, Green, Blue, Amber  
Emission:  
PC precision optics 8°, 30°, 45°, 8°x45°, 100° and 40°x75° reflector  
Working position:  
Any  
Fixation:  
2 bracket with 3 elongated holes Ø6.2mm and 1 hole Ø6.2mm  
IP rating:  
IP65 and IP67  
IK rating:  
IK 08  
Storage:  
-50°C to +80°C  
Control:  
On/Off or standard DMX-512A/RDM  
DMX channels:  
1 (mono), 3 (RGB, TW)  
Connection:  
2 free end cables for DMX model (1 for power 1 for signal), 1  
cable for On/Off, 0.8 m length  
Construction:  
Anodised aluminium extruded body, AISI 316 stainless steel brackets,  
pressure compensation valve, UV-stable polycarbonate cover,  
hermetic sealing by silicone gaskets, stainless steel screws  
Weight:  
2,4 Kg

Authorised Dealer