




Sylverline Chain 300

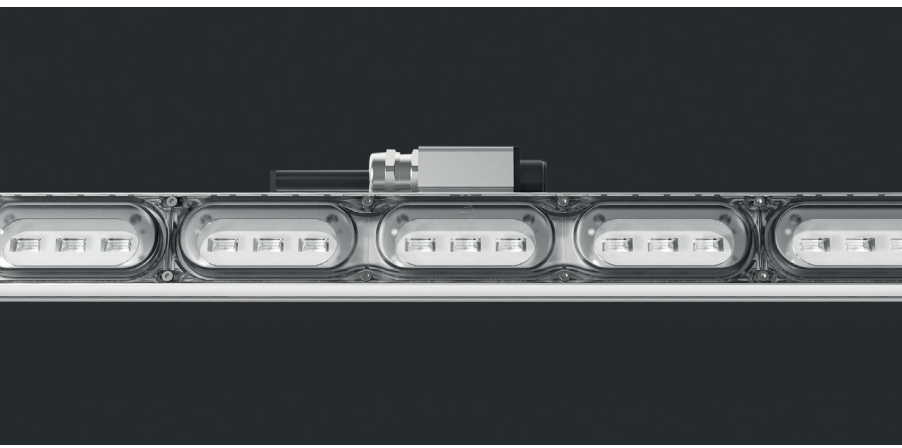

Dimensions (mm)

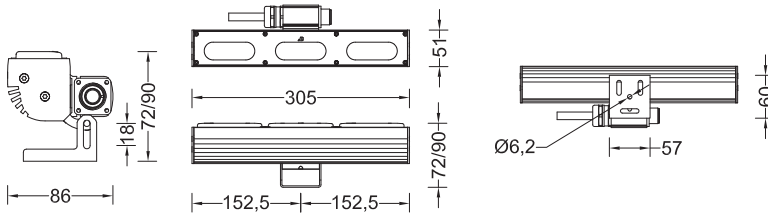

Photometric curve

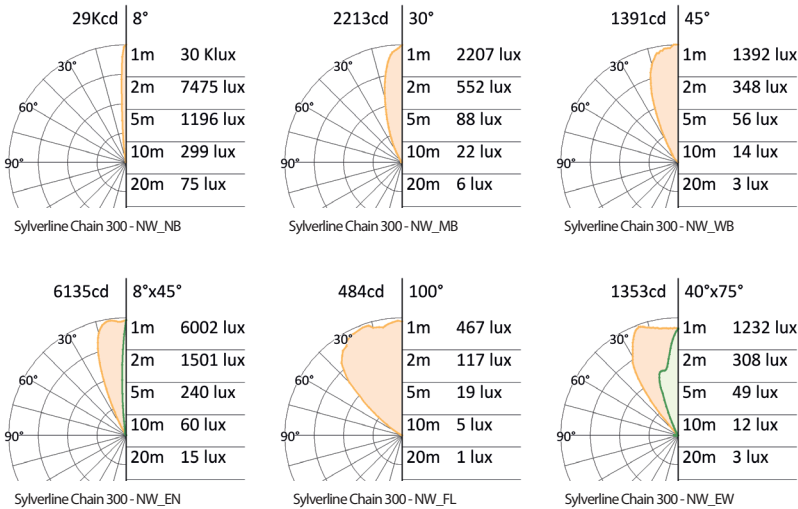

Technical specification

Source:
High power LED
LED Count:
9
LED life time:
>50,000 hrs (L70 B50)
Source flux:
1100 lm (NW)
Luminaire efficiency:
74 lm/W (NW_NB)
Input power:
12W
Supply voltage:
230V 50/60Hz
Driver:
Integrated
Insulation class:
I
Protections:
Short circuit, overload, over voltage and thermal protection
Colour:
White (2200K to 6000K), Red, Green, Blue, Amber
Emission:
PC precision optics 8°, 30°, 45°, 8°x45°, 100° and 40°x75° reflector
Working position:
Any
Fixation:
1 bracket with 3 elongated holes Ø6.2mm and 1 hole Ø6.2mm
IP rating:
IP65 and IP67
IK rating:
IK 08
Storage:
-50°C to +80°C
Control:
On/Off
Connection:
Daisy chain cabling, IP67 connectors
Construction:
Anodised aluminum extruded body, AISI 316 stainless steel bracket, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by silicone gaskets, stainless steel screws
Weight:
1.1 kg

Code table

product	size	finishing	control	voltage	color	optics
CHN	03	AN	X	230	SW	NB
CHN= Sylverline Chain	03= 300mm	AN= Anodised aluminium	X= Without DMX	230= 230V 50/60 Hz	SW = 2200 K WW= 3000 K NW= 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics EW = Elliptical wide

Specification are subject to change without notice.
rev . datasheet Sylverline Chain 300 1115EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer