



Thintube 1500

Technical specification


Source:
Mid power LED
LED Count:
90
LED life time:
>50,000 hrs (L70 B50)
Source flux:
1725 lm (NW)
Luminaire efficiency:
54 lm/W (NW_OD)
Input power:
25.5W
Supply voltage:
24 VDC
Driver:
Remote
Insulation class:
III
Colour:
White (3000K to 6000K)
Emission:
120° diffusing cover
Working position:
Any
Fixation:
3 brackets with 2 holes Ø4.5mm
IP rating:
IP65
Storage:
-50°C to +80°C
Control:
No control (On/Off)
Connection:
2 free end cables (In/Out), 0.8m length
Construction:
Sandblasted metacrylate UV resistant body, hermetic sealing by EPDM gaskets, stainless steel brackets
Weight:
0.65 kg



Dimensions (mm)

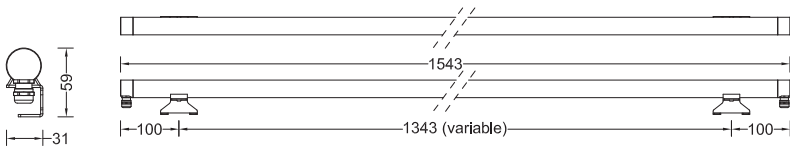

Photometric curve



Code table

product	size	finishing	control	voltage	color	optics
THB	15	TP	R	024	WW	OD
THB= Thintube	15= 1500mm	TP= Metacrylate	R= Regulator	024= 24Vdc	WW= 3000 K NW = 4000 K CW = 6000 K	OD= Opal diffuser

Specification are subject to change without notice.
rev . datasheet thintube 1500 1015EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer