



# Window



## Dimensions (mm)

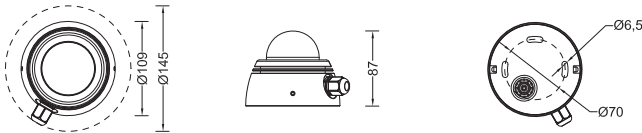

## Photometric curve

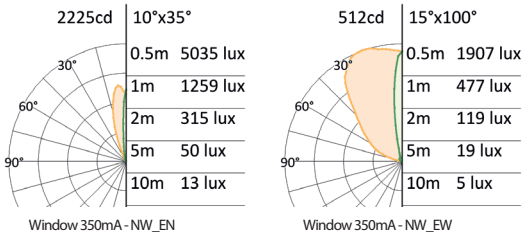

## Technical specification

**Source:**  
 High power LED  
**LED Count:**  
 3  
**LED life time:**  
 >50,000 hrs (L70 B50)  
**Source flux:**  
 365 lm (NW)  
**Luminaire efficiency:**  
 69.5 lm/W (NW\_NB)  
**Input power:**  
 4.5W  
**Supply voltage:**  
 230V 50/60Hz  
**Driver:**  
 Integrated  
**Insulation class:**  
 I  
**Protections:**  
 Short circuit, overload, over voltage and thermal protection  
**Colour:**  
 White (2200K to 6000K), Red, Green, Blue, Amber  
**Emission:**  
 PMMA precision optics 10°x35°, 15°x100°  
**Working position:**  
 Flat surface mounted  
**Fixation:**  
 3 elongated holes Ø6.5 mm and a hole Ø6.5 mm  
**IP rating:**  
 IP65 and IP67  
**IK rating:**  
 IK 08  
**Working temperature:**  
 Operating: -30°C to +50°C  
 Storage: -50°C to +80°C  
**Connection:**  
 Free cable, 0.8 m length  
**Construction:**  
 Anodised aluminum body, UV-stable polycarbonate dome, hermetic sealing by silicone gaskets, stainless steel screws and bracket  
**Weight:**  
 0.8 kg

## Code table

product	size	finishing	control	voltage	color	optics
WIW	03	AN	X	230	SW	EN
WIW= Window	03= 3 LEDs	AN= Anodised aluminium	X= Without DMX	230= 230V 50/60 Hz	SW= 2200 K WW= 3000 K NW= 4000 K CW= 6000 K MR = Red MG = Green MB = Blue MA = Amber	EN= Elliptical narrow EW= Elliptical wide

Specification are subject to change without notice.  
rev . datasheet window 0316EN

Space Cannon Australia Pty Ltd  
 1/169 Beavers Road | Northcote | Vic | 3070  
 T (+61 3) 9486 5366 | sales@spacecannon.com.au  
 www.spacecannon.com.au

Authorised Dealer