

For more information please contact

lightmoves (03) 9701 2500
info@lightmoves.com.au

138-146 Browns Rd, Noble Park VIC 3174



E-STREAMER Mk2

Take control of your pre-recorded light show content and tame even the wildest applications.

Improving on the base platform of its predecessor, the E-Streamer Mk2 is small, fast, flexible, and rugged. The basic unit is capable of recording numerous universes of DMX per show. With additional licenses, up to 64 universes of recording are possible. The E-Streamer Mk2 can playback multiple concurrent shows. The HTML- based user interface, based on the already popular Datagate Mk2's, is intuitive for any user. The built-in scheduler makes it possible to assemble complex playback arrangements over days, months, and even years. The E-Streamer Mk2 can remain onsite, allowing the control console to be allocated to other projects.

Front Panel buttons allow for manual starting/stopping of show playback and limited access to other features. To take full advantage of the configuration and scheduling options, a remote computer's web-based browser is required.

FEATURES

- Available in two hardware configurations,
 - Model 70710 features 4 built-in DMX ports in and out
 - Model 70711 (Ethernet in/out only) has more universes enabled
- Configurations from 4 to 64 universes available
- Multiple universe recording and simultaneous recording while playing other shows
- Unlimited simultaneous show playback (HTP merging between shows)
- Unlimited number of shows
- SD Card for show storage
- DMX512, Art-Net, and ESP protocol support
- Control and configuration using built-in web interface
- Web-based mastering of shows permitted during playback
- Show control using RS232 or Ethernet-based commands
- Flexible play list allows event scheduling by minute, hour, day, and month increments

APPLICATIONS

- Architectural
- Trade shows
- Theme parks
- Conference rooms

REMOTE CONTROL

- RS232 serial command based protocol
- TCP/IP-based control protocol
- Art-Net remote show triggering
- Real-Time control

HARDWARE

- Fits into standard 19" rack single height (1RU)
- 10/100 Ethernet port
- 2 x USB ports
- 1 x RS232 port
- 4x40 character front panel LCD screen for status display
- 4 front panel keys for menu navigation including show control


Part Numbers

70710 - 4 ports in and 4 ports out of DMX.
Licensed for 4 universes

70711 - Ethernet based input and output.
Licensed for 8 universes

70724 - Additional blocks of 4 universe upgrade license

70728 - Additional blocks of 8 universe upgrade license

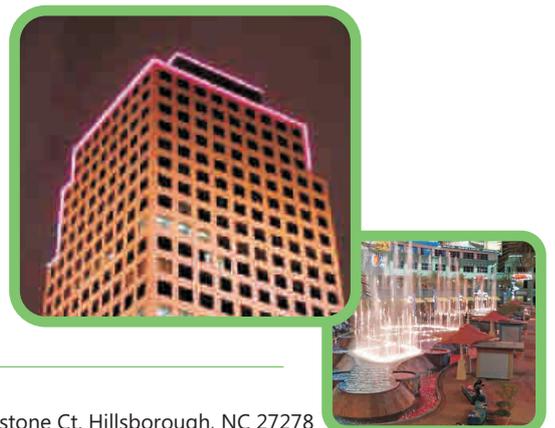

Head Office:

ENTTEC Pty Ltd- 17/5 Samantha Ct, Knoxfield, Vic 3180, Australia.

Tel: +61 3 9763 5755 Fax: +61 3 9763 5688 E-mail: sales@enttec.com

American Office:

ENTTEC- 604A Cornerstone Ct. Hillsborough, NC 27278

Tel: (888) 454-5922 Fax: (888) 454-5922