





### Dimensions (mm)

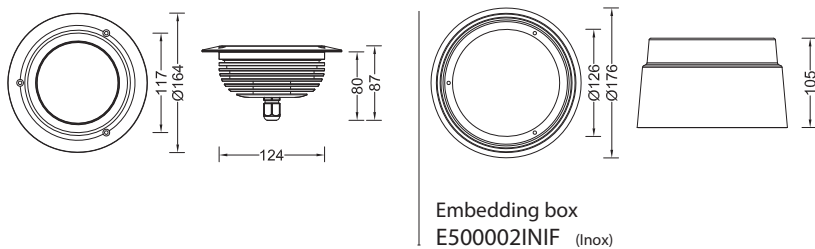

### Photometric curve

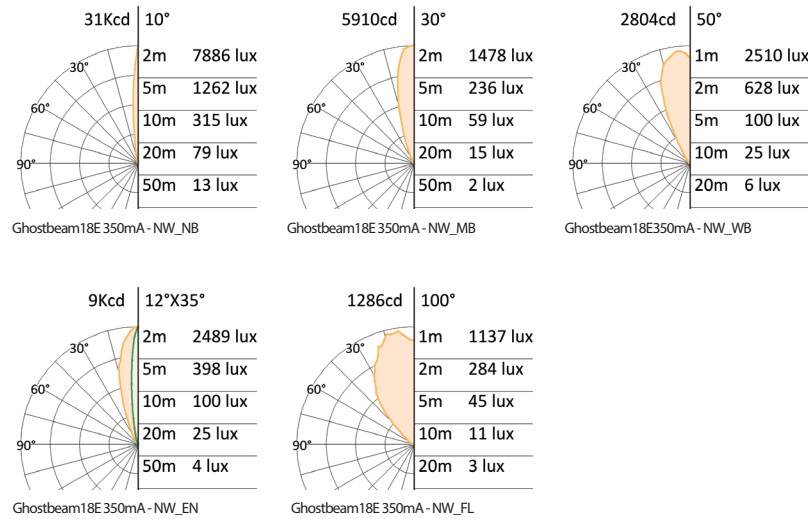

### Technical specification

Source:  
High power LED  
LED Count:  
18  
LED life time:  
>50,000 hrs (L70 B50)  
Source flux:  
2195 lm (NW)  
Luminaire efficiency:  
77 lm/W (NW\_NB)  
Input power:  
23W  
Supply current:  
350mA  
Driver:  
Remote  
Insulation class:  
III  
Colour: White  
(2200K to 6000K), RGB, Tunable White (2200K to 6000K),  
Red, Green, Blue, Amber  
Emission:  
PMMA precision optics 10°, 30°, 50°, 100°, 12°x35°  
Working position:  
Recessed  
Fixation:  
3 Holes Ø4.5mm  
IP rating:  
IP65 and IP67  
IK rating:  
IK 08  
Storage:  
-50°C to +80°C  
Maximum glass temp.:  
<35° (TA=20°)  
Control:  
No control (On/Off) or via control accessories (DMX-512A)  
Connection:  
Free end cable, 0.8m length  
Construction:  
Anodised aluminum body, anodised aluminium or AISI 316  
stainless steel front plate, tempered front glass, hermetic  
sealing by silicone sealing, stainless steel screws  
Weight:  
1.3 kg

### Code table

product	size	finishing	control	voltage	color	optics
GHB	18	AN	S	000	SW	NB
GHB= Ghostbeam	18= 18 LEDs	AN= Anodised aluminium SS= Stainless steel front plate	S= Separated	000= Constant current	SW = 2200 K WW= 3000 K NW = 4000 K CW = 6000 K MR = Red MG = Green MB = Blue MA = Amber RT = RGB TW = SW to CW	NB = Narrow beam MB = Medium beam WB = Wide beam EN = Elliptical narrow FL = Flood optics

Specification are subject to change without notice.  
rev . datasheet Ghostbeam 18E 1215EN

Space Cannon Australia Pty Ltd  
1/169 Beavers Road | Northcote | Vic | 3070  
T (+61 3) 9486 5366 | sales@spacecannon.com.au  
www.spacecannon.com.au

Authorised Dealer